



13HC UNDER CABINET SPECIFICATION SHEET

OVERVIEW

Architectural luminaires proudly built in America since 1935. The 13HC series is a healthcare grade under cabinet/task light luminaire available in lengths from 1'-8' in single fixture or joinable for continuous row runs. Standard with our antimicrobial finish. Three standard lumen packages available with custom capabilities as well up to 1200 lumens per foot. Standard finish options include antimicrobial powdercoat white or black or gray with custom options available

KEY FEATURES

- **BABAA Compliant**
Hand crafted in California
- **L70>72,000 hours**
High quality electrical components
- **90+ CRI Standard**
High definition color rendering
- **<3SDMC consistency**
Uniform color consistency
- **123 Lumens per watt**
Efficient performance delivered

DETAILS

01 Housing

Extruded aluminum body powder coated antimicrobial finish. Extruded high diffusion acrylic lens. Aluminum end caps with no visible fasteners.

02 Electrical

Integral 120/277V driver standard. If 0-10V dimming is specified 10 and 1% options available. Occupancy and vacancy sensors are available options.

03 LED Array

High quality Samsung chips, delivering 123 lumens per watt on the system level, mounted on an aluminum heatsink for thermal management.

04 Mounting options

Surface direct or magnet mount available.



BUILD A PART NUMBER

• SERIES	• LIGHT OUTPUT	• CCT	• LENGTH IN INCHES	• HOUSING COLOR	• OPTIONS
• 13HC					
• 13HC	<ul style="list-style-type: none"> • N NORMAL • H HIGH • V VERY HIGH 	<ul style="list-style-type: none"> • 27K • 30K • 35K • 40K • 50K 	<ul style="list-style-type: none"> • 12 • 18 • 24 • 36 • 48 • 60 • 72 • 84 • 96 	<ul style="list-style-type: none"> • 0 GRAY • 3 WHITE • 5 BLACK • CUSTOM 	<ul style="list-style-type: none"> • WC 6' WHITE 3-WIRE CORD AND PLUG (18GA. SVT) • F FACTORY WIRED FUSE • SWD DECORA ROCKER SWITCH (120/277V) • D10 10% 0-10V DIMMING • D11 1% 0-10V DIMMING • GCO FACTORY WIRED GROUNDED CONVICIENCE OUTLET • OCC INTEGRAL OCCUPANCY SENSOR (120/277V) • VS VACANCY SENSOR (120V ONLY) • DD DRIVER DISCONNECT


CERTIFICATION / WARRANTY



ETL Listed for dry or damp locations




PHOTOMETRIC PERFORMANCE

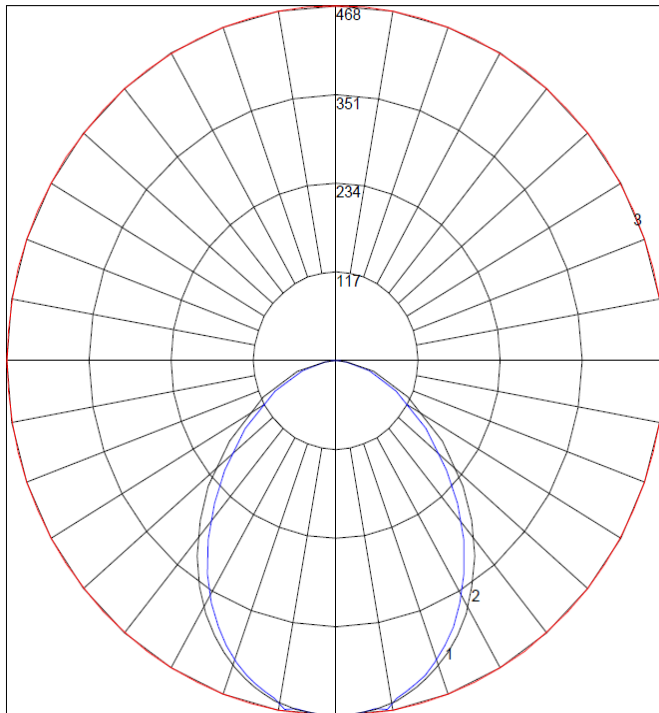

• [IES File link](#)

• [installation instructions link](#)

• LENGTH	• WATTAGE	• LUMENS
• 24" NORMAL	• 8.8	• 1090
• 36" NORMAL	• 13.2	• 1635
• 48" NORMAL	• 17.6	• 2180
• 24" HIGH	• 12.6	• 1562
• 36" HIGH	• 18.9	• 2343
• 48" HIGH	• 25.2	• 3124
• 24" VERY HIGH	• 17.6	• 2180
• 36" VERY HIGH	• 26.4	• 3270
• 48" VERY HIGH	• 35.2	• 4360

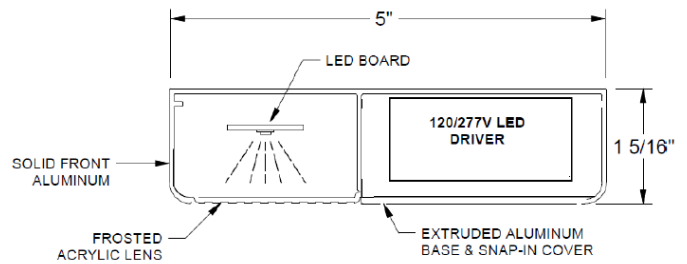


CONTACT US!

www.airey-thompson.com

Phone: 800.421.6196

E-mail: contactus@aireythompson.com



• 13HC-CUT-24A