

AIREY-THOMPSON™
Manufacturing Quality Luminaires

13L SERIES LED
UNDER CABINET LUMINAIRE
WITH SOLID FRONT
SPEC GRADE / MADE IN USA
BUY AMERICAN ACT COMPLIANT



HANDCRAFTED
IN THE USA
BABA COMPLIANT

120/277v



Integral Driver



COLOR
CONSISTENCY
<3 SDMC


L70>72,000

80+CRI

90+AVAIL.



AIREY-THOMPSON™
Manufacturing Quality Luminaires

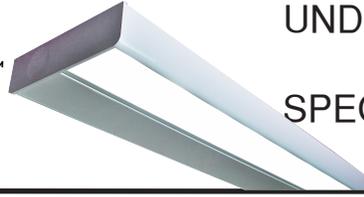

13L SERIES LED
UNDER CABINET LUMINAIRE
WITH SOLID FRONT
SPEC GRADE / MADE IN USA

How to build a part number	Product Series	Light Output	Color Temperature	Length in Inches	Lens Type	Housing Color	Typical extra charge options Suffix part # as required in the sequence below
Part number format	13L	N	30K	-24	-2	-3	-SWD
Choices	13L	N (Normal) H (High) V (Very high) (Custom: specify lumens)	27K 30K 35K 40K 50K	-12 -18 -24 -36 -48 -60 -72 -84 -96	-2= Frosted	-0= Satin -3= White	-WC (6') White 3-wire cord & plug (18ga. SVT) -F Factory wired fuse -SWD Decora rocker switch (120/277V) -AM Anti-Microbial finish -D10 10 % 0-10V dimming -D11 1% 0-10V dimming -GCO Factory wired grounded convenience outlet -OCC Integral occupancy sensor (120/277V) -VS Vacancy sensor (120V only) -DD Driver disconnect

Airey-Thompson 13L Series having a cross section of 5" by 1-5/16" made from extruded aluminum with .060 wall thickness and aluminum end caps with no visible fasteners. Impact resistant frosted acrylic lens. Universal voltage FCC Title 47 Part 15 Class A or B compliant electronic driver to avoid RFI. The luminaire shall be ETL Listed for damp locations. Buy American Act Compliant.

SPECIFICATIONS

Voltage: Equipped with integral, electronic 120/277v LED driver, FCC Title 47 Part 15 compliant.

**BUY AMERICAN
ACT COMPLIANT**

Finish: Powdercoat White or satin anodized aluminum standard. Anti-microbial finish optionally available. Consult factory for custom finishes.


Warranty: 5 year limited warranty, see Airey-Thompson distributor terms and conditions for details.

Construction: extruded 6063T-5 aluminum base and cover with .060 nominal wall thickness, aluminum end caps with light leak gaskets and no visible fasteners, extruded high impact frosted acrylic lens.

Mounting: Two mounting slots. For continuous row mounting simply remove end caps where luminaires meet and use the internal coupler (provided) to make a seamless link. Feed end caps provided.




AIREY-THOMPSON™
Manufacturing Quality Luminaires

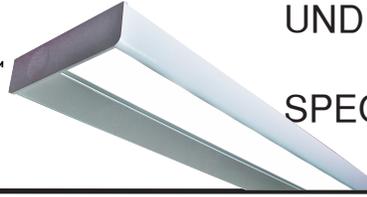

13L SERIES LED

UNDER CABINET LUMINAIRE
 WITH SOLID FRONT
 SPEC GRADE / MADE IN USA

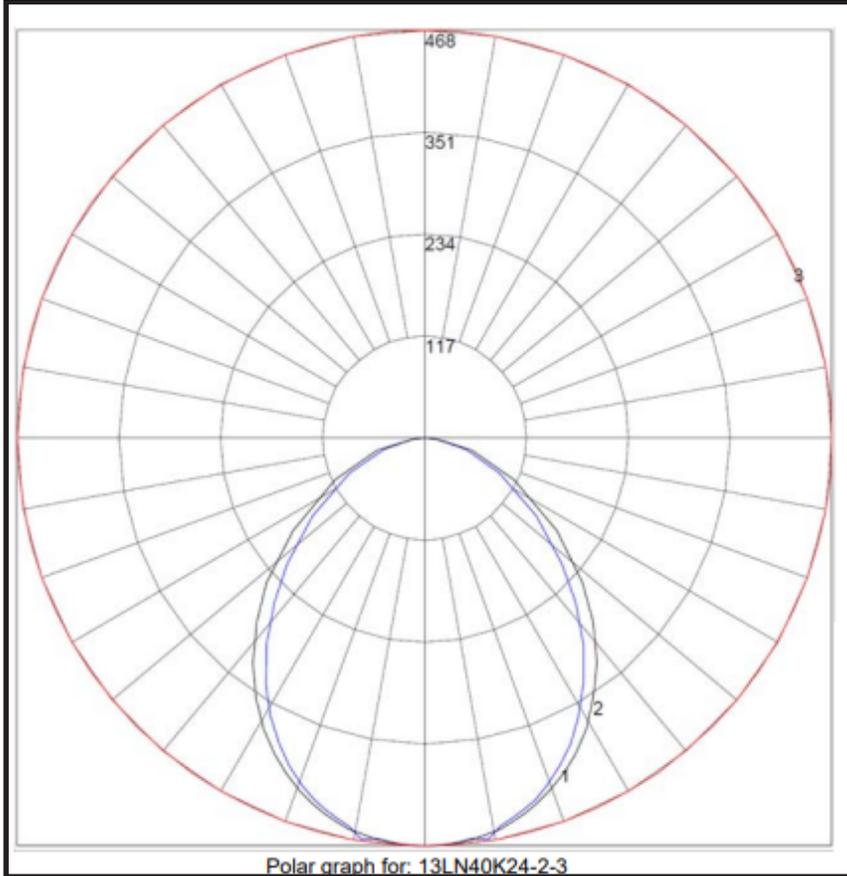

NORMAL OUTPUT FIXTURES		
LENGTH	WATTAGE	LUMENS
12"	4.4	545
24"	8.8	1090
36"	13.2	1635
48"	17.6	2180

HIGH OUTPUT FIXTURES		
LENGTH	WATTAGE	LUMENS
12"	6.3	781
24"	12.6	1562
36"	18.9	2343
48"	25.2	3124

VERY HIGH OUTPUT FIXTURES		
LENGTH	WATTAGE	LUMENS
12"	8.8	1090
24"	17.6	2180
36"	26.4	3270
48"	35.2	4360



