

# 13L UNDER CABINET SPECIFICATION SHEET

## OVERVIEW

Architectural luminaires proudly built in America since 1935. The 13L series is a specification grade under cabinet / task light luminaire available in lengths from 1'-8' in single fixture or joinable for continuous row runs. Three standard lumen packages available with custom capabilities as well up to 1200 lumens per foot. Standard finish options include powdercoat white or black or satin anodized with anti-microbial and other custom options available upon request.

### KEY FEATURES

- **BABAA Compliant**  
Hand crafted in California
- **L70>72,000 hours**  
High quality electrical components
- **90+ CRI Standard**  
High definition color rendering
- **<3SDMC consistency**  
Uniform color consistency
- **123 Lumens per watt**  
Efficient performance delivered

## DETAILS

### 01 Housing

Extruded aluminum body powder coated or anodized finish. Extruded high diffusion acrylic lens. Aluminum end caps with no visible fasteners.

### 02 Electrical

Integral 120/277V, 50/60hz driver standard. 10% and 1% 0-10v dimming options. Vacancy or occupancy sensors are optionally available.

### 03 LED Array

High quality Samsung chips, delivering 123 lumens per watt on the system level, mounted on an aluminum heatsink for thermal management.

### 04 Mounting options

Surface direct or magnet mount available.



# BUILD A PART NUMBER

SERIES	LIGHT OUTPUT	CCT	LENGTH IN INCHES	HOUSING COLOR	OPTIONS
13L					
13L	<ul style="list-style-type: none"> <li>N NORMAL</li> <li>H HIGH</li> <li>V VERY HIGH</li> </ul>	<ul style="list-style-type: none"> <li>27K</li> <li>30K</li> <li>35K</li> <li>40K</li> <li>50K</li> </ul>	<ul style="list-style-type: none"> <li>12</li> <li>18</li> <li>24</li> <li>36</li> <li>48</li> <li>60</li> <li>72</li> <li>84</li> <li>96</li> </ul>	<ul style="list-style-type: none"> <li>0: SATIN</li> <li>3: WHITE</li> <li>5: BLACK</li> <li>CUSTOM</li> </ul>	<ul style="list-style-type: none"> <li>SWD DECORA ROCKER SWITCH (120/277V)</li> <li>AM ANTI MICROBIAL FINISH</li> <li>D10 10% 0-10V DIMMING</li> <li>D11 1% 0-10V DIMMING</li> <li>OCC INTEGRAL OCCUPANCY SENSOR (120/277V)</li> <li>VS VACANCY SENSOR (120V ONLY)</li> <li>GCO FACTORY WIRED GROUNDED CONVICIENCE OUTLET</li> <li>DD DRIVER DISCONNECT WC 6'</li> <li>WC WHITE 3-WIRE CORD AND PLUG (18GA. SVT)</li> <li>MAG MAGNETIC MOUNT</li> </ul>


## CERTIFICATION / WARRANTY



ETL Listed for dry or damp locations




## PHOTOMETRIC PERFORMANCE

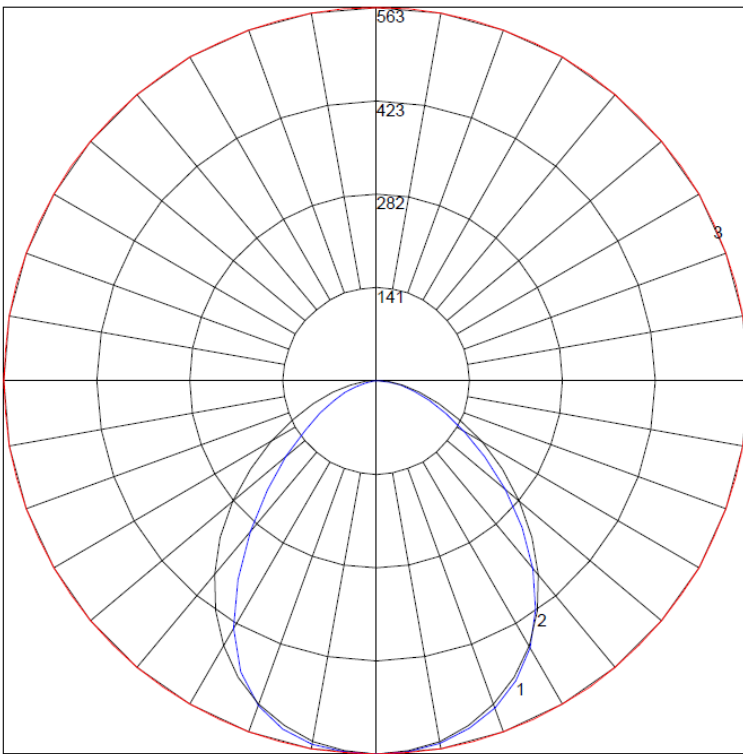

- [IES File link](#)
- [installation instructions link](#)

LENGTH / OUTPUT	WATTAGE	LUMENS
24" NORMAL	8.8	1090
36" NORMAL	13.2	1635
48" NORMAL	17.6	2180
24" HIGH	12.6	1562
36" HIGH	18.9	2343
48" HIGH	25.2	3124
24" VERY HIGH	17.6	2180
36" VERY HIGH	26.4	3270
48" VERY HIGH	35.2	4360

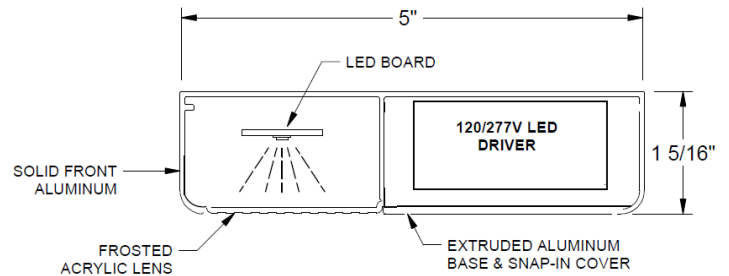


## CONTACT US!

www.airey-thompson.com

Phone: 800.421.6196

E-mail: [contactus@aireythompson.com](mailto:contactus@aireythompson.com)



13L-CUT-24B