




AIREY-THOMPSON™
Manufacturing Quality Luminaires

61S LED STAIRWELL
INTEGRATED OCCUPANCY SENSOR
SURFACE MOUNT
SMALL CROSS SECTION
LUMINAIR
MADE IN USA SINCE
1935

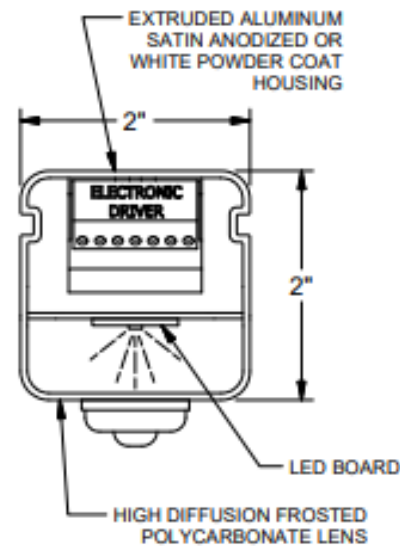

**HANDCRAFTED
IN THE USA**
BABA COMPLIANT

120/277v



Integral Driver



Intertek



**COLOR
CONSISTENCY**
<3 SDMC

L70>72,000

80+CRI

90+AVAIL.



AIREY-THOMPSON™
Manufacturing Quality Luminaires

61S LED STAIRWELL
INTEGRATED OCCUPANCY SENSOR
SURFACE MOUNT
SMALL CROSS SECTION
LUMINAIR
MADE IN USA SINCE
1935

SPECIFICATIONS

LED ARRAY

High density LED arrays are used to maximize visual appeal. Only premium quality Samsung LED chips are used and are available in 2700K, 3000K, 3500K and 4000K with a tested CRI of 85, 90+ is available. Arrays are mounted to an aluminum cover for superior thermal management to extend LED life. Color consistency < 3SDCM

Step Dimming is standard. When no one is in the stairwell, the fixture is dimmed to 50% to allow for safe and comfortable entry of the stairwell while dramatically saving energy. When the occupancy sensor detects motion the fixture is energized to 100% and remains there for a pre-selected period of time once motion is no longer detected.

CONSTRUCTION:

Premium 6063-T5 extruded aluminum with .060 minimum wall thickness, aluminum end caps, extruded impact resistant, high diffusion frosted polycarbonate lens.



WARRANTY

Luminaire warranted for 5 years from the date of manufacturing.

PERFORMANCE

124 Lumens per watt for 3000K. Three standard light output options: Normal 5 watts and 616 lumens per foot, High 7 watts and 866 lumens per foot, Very high 10 watts and 1160 lumens per foot. Custom lumen programming available.





AIREY-THOMPSON™
Manufacturing Quality Luminaires

61S LED STAIRWELL
 INTEGRATED OCCUPANCY SENSOR
 SURFACE MOUNT
 SMALL CROSS SECTION
 LUMINAIR
MADE IN USA SINCE
1935

**BUILD YOUR
 FIXTURE**

How to build a part number	Product Series	Light Output	Color Temperature	Length in Inches	Housing Color	Typical extra charge options Suffix part # as required in the sequence below
Part number format	61S	N	40K	48	-0	-EM
Choices	61S	N= Normal H= High V= Very High	40K	48	-0= Satin -3= White	-EM Emergency battery backup -TR Tamper resistant straps

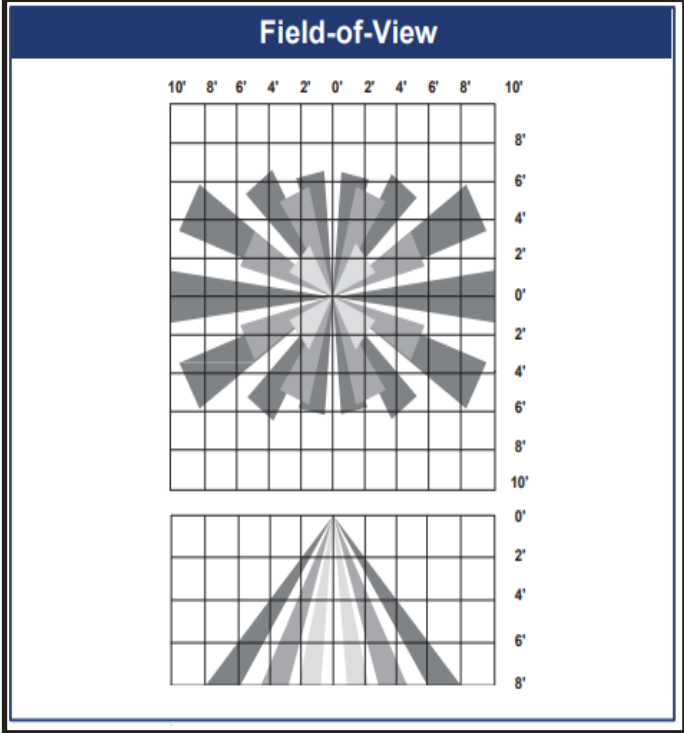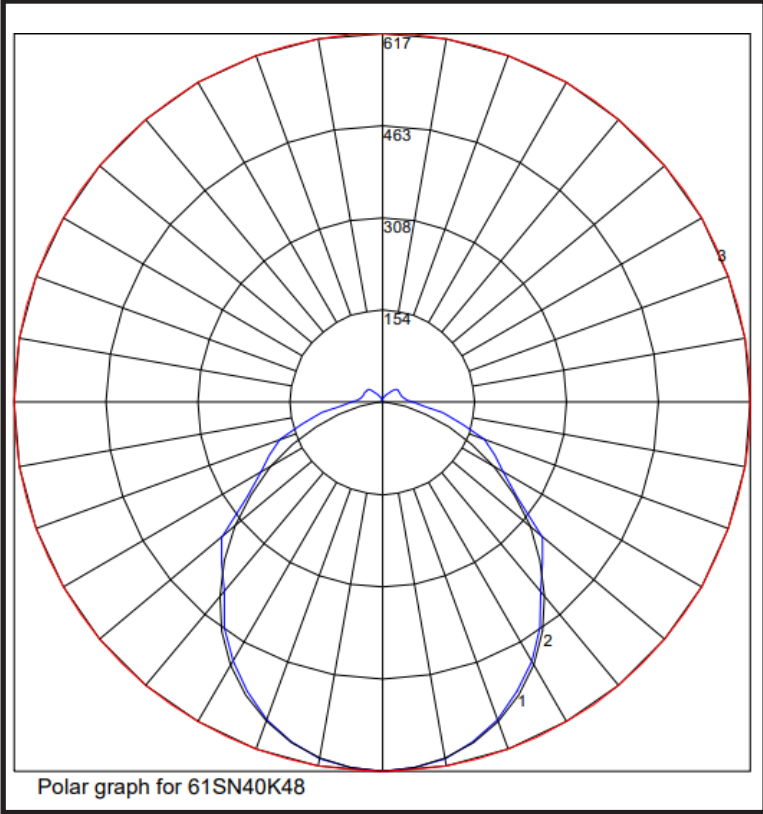

FIXTURE PERFORMANCE*		
LIGHT OUTPUT	WATTAGE	LUMENS
NORMAL	15.9	1873
HIGH	22.25	2623
VERY HIGH	28.5	3277