




Type:

LED UNDER CABINET

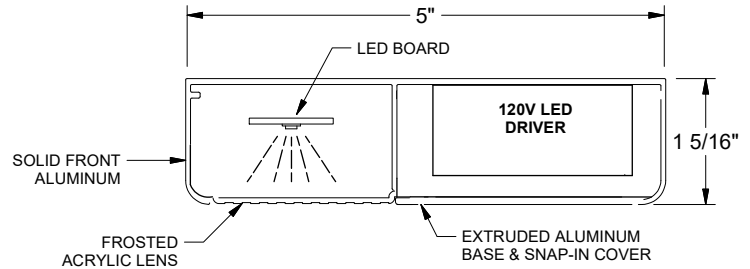

The 13 Advantage line was built to be more cost effective while still maintaining the signature Airey-Thompson quality that has built our reputation in the lighting industry. If you don't need all the bells and whistles of the 13L series but still want the quality, the Advantage line is for you.

FEATURES and BENEFITS

- **Applications:** residential, hotel rooms, college dorms, apartments, office applications etc.
- **Energy efficient:** Significant energy savings when compared to a fluorescent fixture.
- **Lumens:** The 'N' (Normal) light output is approximately equivalent to a fluorescent T8.
- **Housing:** Constructed from extruded aluminum, satin anodized aluminum, or powder coat white finish is standard. Feed end caps standard with 7/8" hole to accept standard 1/2" trade size connectors.
- **Dimming:** Phase / Triac dimmable driver optionally available.
- Light leak gaskets virtually eliminate light leak from ends.
- The factory will be happy to discuss all of your special requests.
- 30K, 35K, and 40K Color temp. LED's are available.
- **Proudly made in USA.**

How to build a part number	Product Series	Light Output	Color Temperature	Length in Inches	Lens Type	Housing Color	Typical extra charge options Suffix part # as required in the sequence below
Part number format	13A	N	30K	-24	-2	-3	-SW
Choices	13A	N (Normal)	30K 35K 40K	-12 -18 -24 -36 -48 -60 -72 -84 -96	-2= Frosted	-0= Satin -3= White	-WC (6') White 3-wire cord & plug (18ga. SVT) -GC (6') Gray 3-wire cord & plug (18ga. SVT) -SWD Decora rocker switch -DIM Phase dimmable driver -DPR Factory wired duplex receptacle -DD Driver disconnect



13 ADVANTAGE LINE UNDER CABINET LUMINAIRE LED / SOLID FRONT MADE IN USA

SPECIFICATIONS

Airey-Thompson 13A Series having a cross section of 5" by 1-5/16" made from extruded aluminum with .060 wall thickness and aluminum end caps with no visible fasteners. The lens shall be impact resistant frosted acrylic. The luminaire shall be ETL Listed for damp locations, have a 5 year warranty and be made in the USA.

Construction: extruded 6063T-5 aluminum base and cover with .060 nominal wall thickness, aluminum end caps with no visible fasteners, extruded high impact frosted acrylic lens.

Voltage: Equipped with integral, electronic 120v LED driver.


Mounting: Two mounting slots. For continuous row mounting simply remove end caps where luminaires meet and use the internal coupler (provided) to make a seamless link. Feed end caps provided.

Finish: Powdercoat White or satin anodized aluminum standard.

Listing: ETL Listed damp location.

Warranty: 5 year limited warranty, see Airey-Thompson distributor terms and conditions for details.

*LED technology is continually improving, specifications subject to change without notice.

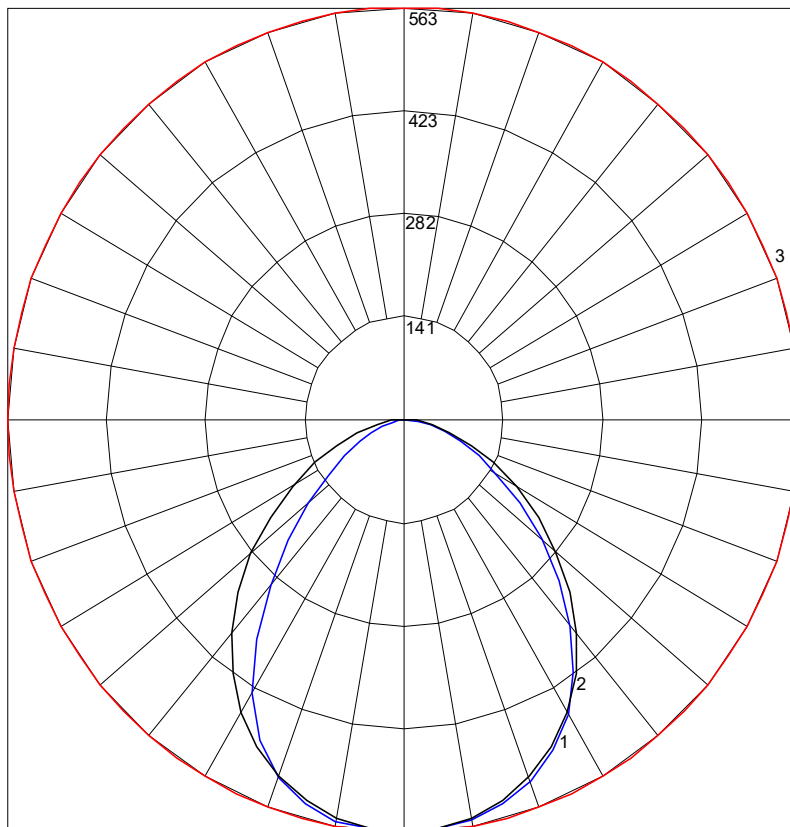

Polar graph for: 13AN40K48-2-3

STANDARD FIXTURES		
LENGTH	WATTAGE	LUMENS
12"	7	456
24"	9	652
36"	13.5	1056
48"	18	1304

