



13-SERIES UNDER CABINET LUMINAIRE WITH SOLID FRONT LINEAR T8 LAMP

BACK TO
UNDER CABINET

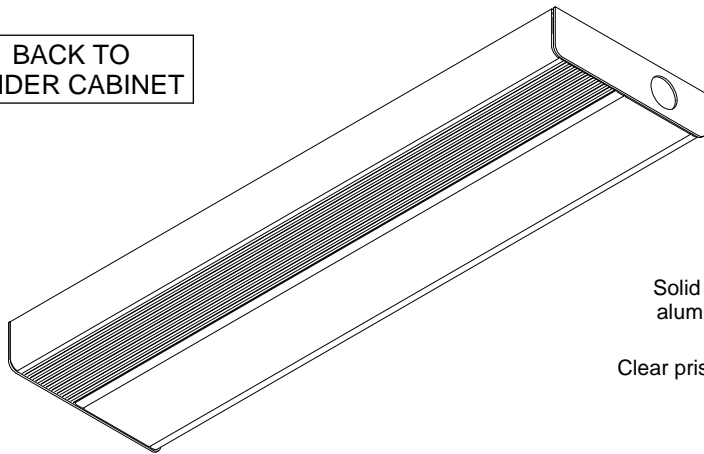

Type: _____

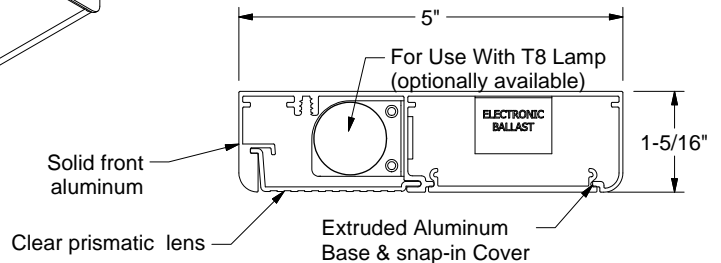

SPECIFICATIONS



- White powder coat or satin anodized aluminum finish is standard.
- Custom finishes available upon request.
- Extruded 6063T-5 aluminum base and cover with .060 nominal wall thickness.
- High impact prismatic, die formed, acrylic lens is standard.
- Electronic, high power factor, instant start, 120 volt ballast is standard.
- Low 1-5/16" profile allows placement in shallow locations.
- Die formed .060" end caps with no visible fasteners.
- Luminaires are provided in hardwired configuration by default (including through wires), but are available with cords.
- Hardwired fixtures are shipped with feed end caps. For continuous row mounting, simply remove end caps where luminaires meet, and use the internal coupler (provided) to make a seamless link.
- All units are UL & CUL LISTED damp locations
- The factory will be happy to discuss all of your special requests.
- Available for use with a wide variety of T8 lamp types.

See lamp chart for selection and lengths.

* If ordered with lamps, 4100k color temp. is standard, other lamp colors may be available.

How to build a Part Number	Product Series	Quantity of inline T8 lamps	Lamp Code	Lens Type	Finish	Standard Options Suffix Part # as required in the sequence below.
Part Number Format	13	1	14T8	0	0	
Choices	13	See lamp chart for luminaire lengths. 1 or 2 lamps are standard.	14T8 15T8 17T8 25T8 32T8	0= Prismatic Clear	0= Satin 3= White	-WC (6') White 3-wire cord & plug (18gs SVT) -GC (6') Gray 3-wire cord & plug (18ga SVT) -SW Factory wired small rocker switch, 120V only -SWD Factory wired Decora rocker switch 120/277V -F Factory wired fuse (3A) -GCO Factory wired Grounded Convenience Outlet (15A) -277 277 Volt Electronic Ballast -41K Lamps Included