


PRELIMINARY CUT SHEET

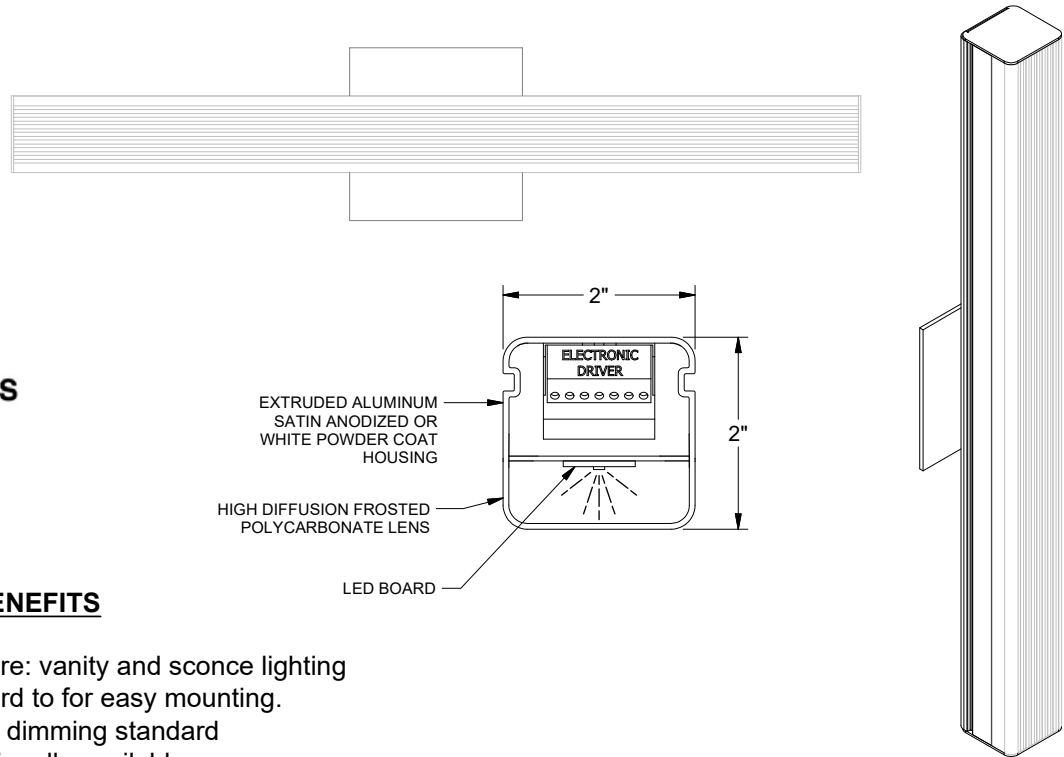

FEATURES AND BENEFITS

- Ideal applications are: vanity and sconce lighting
- J-Box cover standard for easy mounting.
- 1850 lumens, Triac dimming standard
- 0-10V dimming optionally available
- Satin anodized, or powdercoat white finish standard.

CONSTRUCTION: Premium 6063-T5 extruded aluminum with .060 minimum wall thickness, aluminum end caps with no visible fasteners, extruded impact resistant, high diffusion frosted polycarbonate lens.

VOLTAGE: Equipped with integral 120/277v FCC approved driver, Triac dimmable standard, other options available.

MOUNTING: J-Box cover comes standard for easy convenient mounting.

LISTING: ETL Listed damp location.

WARRANTY: 5 year limited warranty, see Airey-Thompson distributor terms and conditions for more details.

How to build part number	Product Series	Light Output	Color Temperature	Length in Inches	Housing Color	Typical extra charge options Suffix part # as required in the sequence below
Part number format	61W	N	40K	22	-0	-XX
Choices	61L	N= Normal L= Low	30K 35K 40K	22 contact factory for other lengths	-0= Satin -3= White	-D10 10% 0-10v dimmable -D11 1% 0-10v dimmable -F Factory wired fuse -OCC Occupancy/Daylight sensor (adds approx. 2-1/2" to OAL)

