



FEATURES

- Smooth asymmetrical beam pattern
- Multiple lumen packages to choose from
- Integral 120/277V 0-10V dimmable driver
- Made in the USA / Buy America compliant



SPECIFICATIONS

LED ARRAY

High density LED arrays are used to maximize visual appeal. Only premium quality Samsung LED chips are used and are available in 2700K, 3000K, 3500K and 4000K with a tested CRI of 85, 90+ is available. Arrays are mounted to an aluminum cover for thermal management to extend LED life.

ELECTRICAL

Integral 120/277V, 0-10V dimmable drivers are standard. 1% 0-10V dimming driver optional.

CONSTRUCTION

Satin anodized extruded aluminum housing and LED mounting. Lens is extruded milky acrylic for pixel free illumination. Aluminum end caps with no visible screws. Stainless steel lens mounting clips.

PERFORMANCE

136 Lumens per watt for 4000K. Three standard light output options: Normal 5 watts and 675 lumens per foot, High 7 watts and 945 lumens per foot, Very high 10 watts and 1350 lumens per foot. Custom lumen programming available.

WARRANTY




Luminaire warranted for 5 years from the date of manufacturing.

How to build a part number	Product Series	Light Output	Color Temperature	Length in Inches	Housing Color	Dimming Options	Beam Selection
----------------------------	----------------	--------------	-------------------	------------------	---------------	-----------------	----------------

Part number format	20L	N	40K	96	0	-D10	-AS1
--------------------	------------	----------	------------	-----------	----------	-------------	-------------

Choices	20L	N= Normal H= High V= Very High (Custom)	27K 30K 35K 40K 50K	12 24 36 48 60 72 84 96	0= Satin	-D10 0-10V dimmable driver -D11 1% 0-10V dimming	-AS1 Asymmetrical beam
---------	------------	---	--	--	-----------------	---	-------------------------------

Luminaire Cross Section

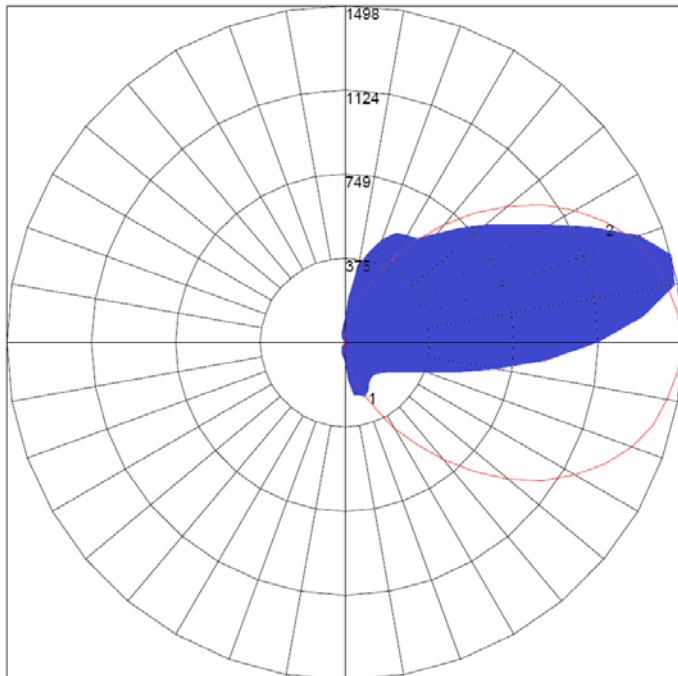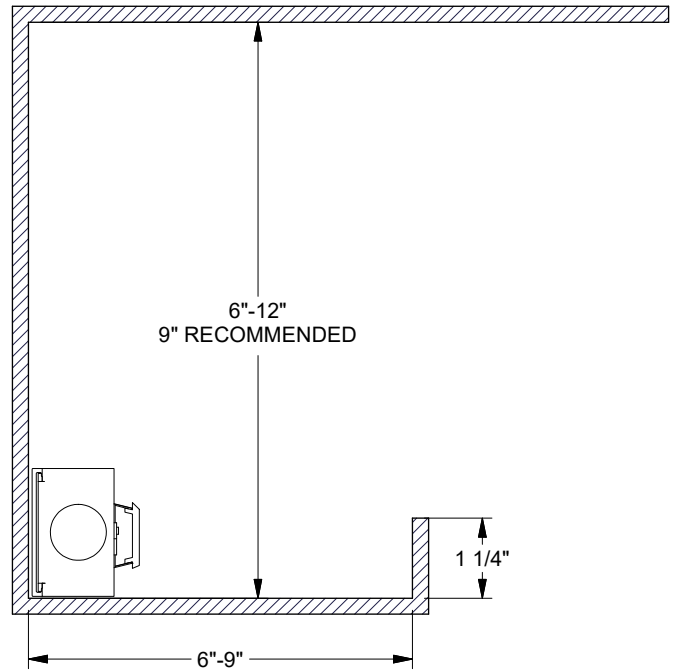

Polar Chart for 20LN40K24-0-AS1

AS1 BEAM NORMAL OUTPUT		
LENGTH	WATTAGE	LUMENS
24"	10	1375
48"	19.84	2750
96"	39.68	5500

AS1 BEAM HIGH OUTPUT		
LENGTH	WATTAGE	LUMENS
24"	14	1925
48"	27.78	3850
96"	55.56	7700

AS1 BEAM VERY HIGH OUTPUT		
LENGTH	WATTAGE	LUMENS
24"	20	2750
48"	39.68	5500
96"	79.36	11000