

# 61/62 Series Installation Instructions

**Warning:** This product should be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved. Be certain that the power is turned off before connecting fixture to supply wire, live wires present a potentially fatal shock hazard.

## Step 1.

Remove diffuser by applying pressure starting at one end with hand as shown in **VIEW "A"**, twist hand to un-snap diffuser and pull away from luminaire.

## Step 2.

Remove reflector/cover starting at one end, using a putty knife or a flat blade screw driver with a thin tip inserting it into the narrow access slot as shown in **VIEW "B"**. Press the tool away from the cover as shown to un-snap the cover from the base. Work the tool towards the opposite end of the fixture until the cover releases. Be careful to no put undue strain on any of the wires connected to the cover.

## Step 3.

If there are keyhole knockouts in a useable location, they may be used for mounting to the intended surface. If different mounting holes are desired, mounting holes can be drilled in the base. Securely mount the base.


## Step 4.

The black conductor from the fixture is connected to the hot supply conductor, and the white conductor from the fixture is connected to the neutral supply conductor. Attach a ground wire to the ground stud.

If you are connecting multiple fixtures for a continuous runs see instructions to couple two fixtures together.

## Step 5.

Snap the cover back into place. Install diffuser.

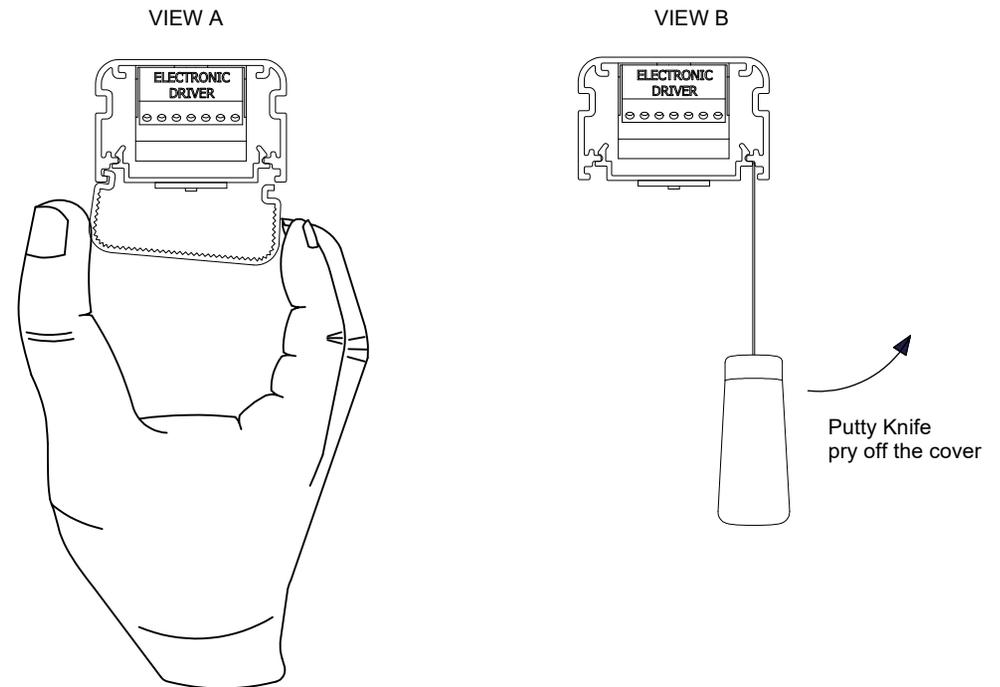

**Instructions to couple two fixtures together:** With the diffuser and cover removed (step 1 & 2) remove the end caps where the fixtures are going to connect by loosening the two set screws and sliding the end caps out of the base. The flat coupler provided may now be installed in the same groove that supported the end caps. Align the two bases and position the coupler half way between the two bases. Hold the two bases together and tighten the set screws. Make wiring connections.

