




13RL UNDER CABINET SPECIFICATION SHEET

OVERVIEW

Architectural luminaires proudly built in America since 1935. The 13RL series is a spec grade multi-receptacle under cabinet/task light luminaire available in lengths from 1'-8' in single fixture or join able for continuous row runs. Three standard lumen packages available with custom capabilities as well up to 1200 lumens per foot. Standard finish options include powder coat white or black or satin anodized with custom options available upon request.

KEY FEATURES

- **BABA Compliant**
Hand crafted in California
- **L70>72,000 hours**
High quality electrical components
- **90+ CRI Standard**
High definition color rendering
- **<3SDMC consistency**
Uniform color consistency
- **123 Lumens per watt**
Efficient performance delivered

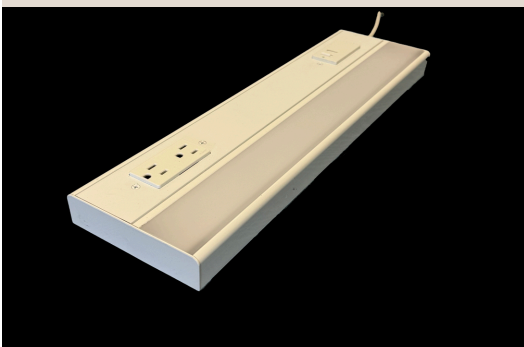

DETAILS

01 Housing

Extruded aluminum body powder coated or anodized finish. Extruded high diffusion acrylic lens. Aluminum end caps with no visible fasteners.

02 Electrical

Integral 120/277V, 50/60HZ driver standard. 10% and 1% 0-10v dimming options. Vacancy or occupancy sensors are optionally available. 15AMP decora duplex every 12". Two circuits standard.

03

LED Array

High quality Samsung chips, delivering 123 lumens per watt on the system level, mounted on an aluminum heatsink for thermal management.

04

Mounting options

Surface direct.

BUILD A PART NUMBER

• SERIES	• LIGHT OUTPUT	• CCT	• LENGTH IN INCHES	• HOUSING COLOR	• OPTIONS
• 13RL					
• 13RL	<ul style="list-style-type: none"> • N NORMAL • H HIGH • V VERY HIGH 	<ul style="list-style-type: none"> • 27K • 30K • 35K • 40K • 50K 	<ul style="list-style-type: none"> • 12 • 18 • 24 • 36 • 48 • 60 • 72 • 84 • 96 	<ul style="list-style-type: none"> • 0 SATIN • 3 WHITE • 5 BLACK • CUSTOM 	<ul style="list-style-type: none"> • F FACTORY WIRED FUSE • SWD DECORA ROCKER SWITCH (120/277V) • AM ANTI MICROBIAL FINISH • D10 10% 0-10V DIMMING • D11 1% 0-10V DIMMING • OCC INTEGRAL OCCUPANCY SENSOR (120/277V) • VS VACANCY SENSOR (120V ONLY) • DD DRIVER DISCONNECT • DW DIM TO WARM


CERTIFICATION / WARRANTY



ETL Listed for dry or damp locations



PHOTOMETRIC PERFORMANCE

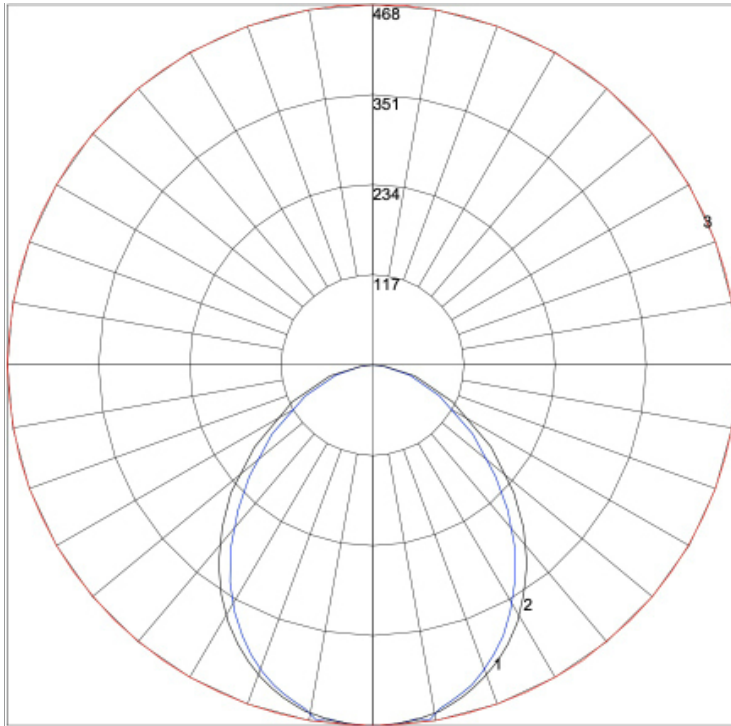


• [IES File link](#)

• [installation instructions link](#)

• LENGTH • WATTAGE • LUMENS

• 24" NORMAL	• 8.8	• 1090
• 36" NORMAL	• 13.2	• 1635
• 48" NORMAL	• 17.6	• 2180
• 24" HIGH	• 12.6	• 1562
• 36" HIGH	• 18.9	• 2343
• 48" HIGH	• 25.2	• 3124
• 24" VERY HIGH	• 17.6	• 2180
• 36" VERY HIGH	• 26.4	• 3270
• 48" VERY HIGH	• 35.2	• 4360

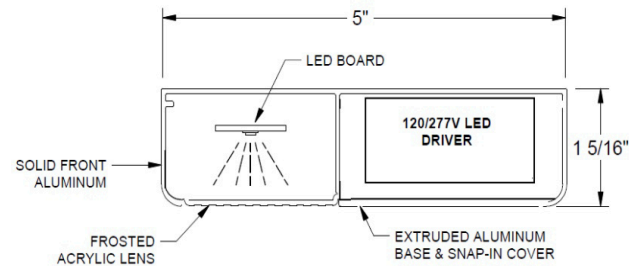


CONTACT US!

www.airey-thompson.com

Phone: 800.421.6196

E-mail: contactus@aireythompson.com



• 13RL-CUT-25A