

13NX UNDER CABINET SPECIFICATION SHEET

OVERVIEW

Architectural luminaires proudly built in America since 1935. The 13L series is a specification grade under cabinet / task light luminaire available in lengths from 1'-8' in single fixture or joinable for continuous row runs. Three standard lumen packages available with custom capabilities as well up to 1200 lumens per foot. Standard finish options include powdercoat white or black or satin anodized with anti-microbial and other custom options available upon request.

KEY FEATURES

- **BABA Compliant**
Hand crafted in California
- **L70>72,000 hours**
High quality electrical components
- **90+ CRI Standard**
High definition color rendering
- **<3SDMC consistency**
Uniform color consistency
- **123 Lumens per watt**
Efficient performance delivered

DETAILS

01 Housing

Extruded aluminum body powder coated or anodized finish. Extruded high diffusion acrylic lens. Aluminum end caps with no visible fasteners.

02 Electrical

Integral 120/277V, 50/60hz driver standard. 10% and 1% 0-10v dimming options. Vacancy or occupancy sensors are optionally available.

03 LED Array

High quality Samsung chips, delivering 123 lumens per watt on the system level, mounted on an aluminum heatsink for thermal management.

04 Mounting options

Surface direct or magnet mount available.



BUILD A PART NUMBER

• SERIES	• LIGHT OUTPUT	• CCT	• LENGTH IN INCHES	• LENS TYPE	• HOUSING COLOR	• OPTIONS
• 13NX				• 2		
• 13NX	• N NORMAL • H HIGH • V VERY HIGH	• 27K • 30K • 35K • 40K • 50K	• 12 • 18 • 24 • 36 • 48 • 60 • 72 • 84 • 96	• 2: FROSTED	• 0: SATIN • 3: WHITE • 5: BLACK • CUSTOM	• SWD DECORA ROCKER SWITCH (120/277V) • AM ANTI MICROBIAL FINISH • D10 10% 0-10V DIMMING • D11 1% 0-10V DIMMING • OCC INTEGRAL OCCUPANCY SENSOR (120/277V) • VS VACANCY SENSOR (120V ONLY) • GCO FACTORY WIRED GROUNDED CONVENIENCE OUTLET • DD DRIVER DISCONNECT • MAG MAGNETIC MOUNT • F FACTORY WIRED FUSE



CERTIFICATION / WARRANTY

ETL Listed for dry or damp locations



PART NO

QUICK CONNECTS


• 13NX-IC	• END TO END INTERCONNECT (DIMMING AND NON- DIMMING
• 13NX-QC12	• QUICK CONNECT 12" 3 WIRE INTERCONNECT CORD
• 13NX-QC18	• QUICK CONNECT 18" 3 WIRE INTERCONNECT CORD
• 13NX-QC24	• QUICK CONNECT 24" 3 WIRE INTERCONNECT CORD
• 13NX-QC12D	• QUICK CONNECT 12" 5 WIRE CORD FOR 0-10V DIMMING
• 13NX-QC18D	• QUICK CONNECT 18" 5 WIRE CORD FOR 0-10V DIMMING
• 13NX-QC24D	• QUICK CONNECT 24" 5 WIRE CORD FOR 0-10V DIMMING

PART NO

POWER CORDS & FIXED WIRE CONVERSION KITS


• 13NX-WCL	• 6' WHITE POWER FEED CORD AND PLUG FOR LEFT SIDE CONNECTION
• 13NX-WCR	• 6' WHITE POWER FEED CORD AND PLUG FOR RIGHT SIDE CONNECTION
• 13NX10W	• LEFT & RIGHT END CAPS W/ 1/2" TRADE SIZE KO FOR CONDUIT FEED, WHITE
• 13NX10S	• LEFT & RIGHT END CAPS W/ 1/2" TRADE SIZE KO FOR CONDUIT FEED SATIN

PHOTOMETRIC PERFORMANCE

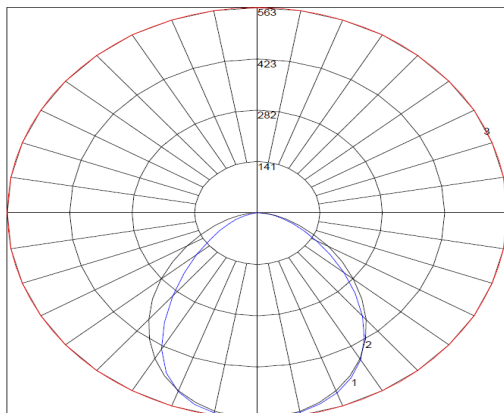

- [IES File link](#)
- [Installation instructions link](#)

• LENGTH / OUTPUT	• WATTAGE	• LUMENS
• 24" NORMAL	• 8.8	• 1090
• 36" NORMAL	• 13.2	• 1635
• 48" NORMAL	• 17.6	• 2180
• 24" HIGH	• 12.6	• 1562
• 36" HIGH	• 18.9	• 2343
• 48" HIGH	• 25.2	• 3124
• 24" VERY HIGH	• 17.6	• 2180
• 36" VERY HIGH	• 26.4	• 3270
• 48" VERY HIGH	• 35.2	• 4360

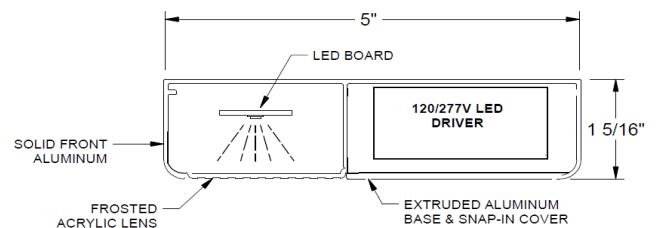

CONTACT US!

www.airey-thompson.com

Phone: 800.421.6196

E-mail: contactus@aireythompson.com



• 13NX-CUT-25A