




CTM-MARINE

CT

High-efficient self-contained marine air conditioners.

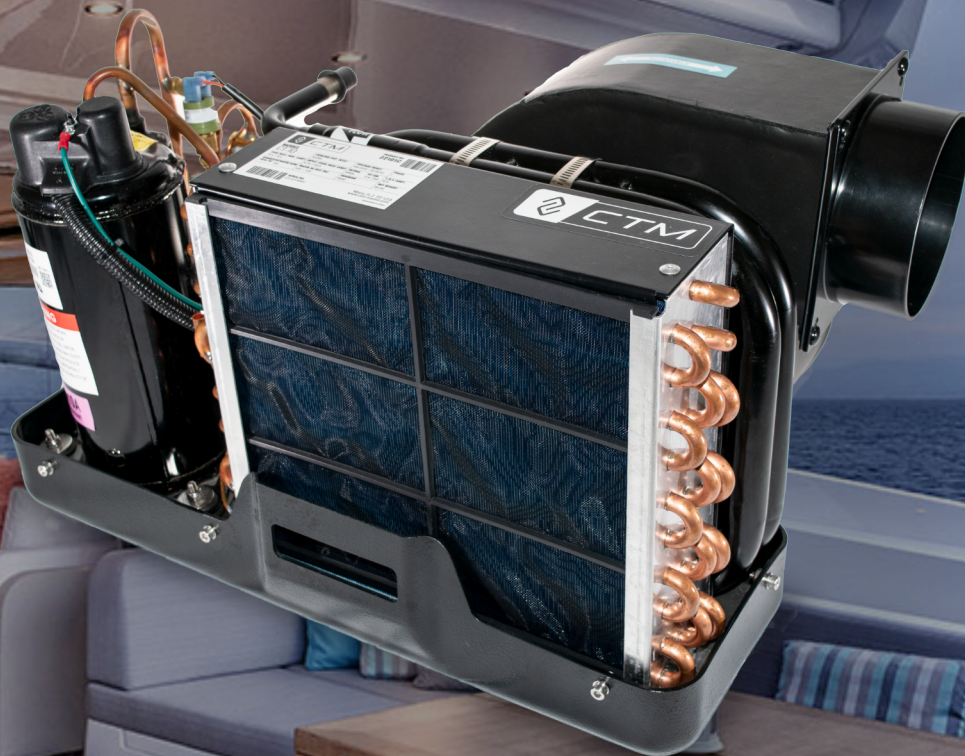

6K - 10k - 12k - 16k BTU



High Velocity Blower



<270° Rotatable Blower



Quiet



Composite Drain Pan



Compact



Cool/Heat



Titanium Condenser Coil



Stainless Steel Frame Base



Universal Board



Re-usable Air Filter



Fire Retardant Electrical Box



Wi-Fi Thermostats

www.ctm-marine.com

Air conditioners for the modern sailor.

Model No.	CT-6		CT-10		CT-12		CT-16	
Capacity (BTU)	6,000		10,000		12,000		16,000	
Voltage (V)	100-120	208-240	105-120	208-230	105-120	208-230	105-120	208-230
Cycle (Hz)	50 / 60							
Input: Cool (A)	4.5	2.1	6.7	3.3	8.7	4.3	10.5	5.1
Input: Heat (A)	5.6	2.7	8.8	3.9	10.8	4.9	13.5	6.6
Fuse Max/Min (A)	15/10	10/7	25 / 16	15 / 10	25 / 16	15 / 10	40 / 25	20 / 12
Locked Rotator Amps (A)	35	15	42	22	43	23	60	34
Refrigerant Type	R410A							
Seawater Inlet Connection (in/mm)	5/8 / 16							
Min. Height (H) (in/mm)	11.50 / 292		12.75 / 324				13.9 / 353	
Max. Height (H) (in/mm)	12 / 305		13.25 / 337				14 / 356	
Width (W) (in/mm)	15.28 / 388		20 / 508				20 / 508	
Max. Depth (D) (in/mm)	9.50 / 240		12 / 305				13.5 / 343	
Min. Return Air Grille (sq in / sq cm)	64 / 413		100 / 646				160 / 1033	
Min. Supply Air Grille (sq in / sq cm)	32 / 206		60 / 388				80 / 517	
Min. Duct Diameter (in / mm)	4 / 102		5 / 127				6 / 152	
Net Weight (lbs/kg)	41 / 19		50 / 23				60 / 27	

