

VOUMARD 1000


The innovative platform concept for
internal and external cylindrical grinding



VOUMARD
WWW.HARDINGE.COM


 **HARDINGE®**

VOUMARD 1000




WORK HEAD WITH DIRECT DRIVE 200

- For high-precision cylindrical grinding
- Rotating speed 1-1,000 rpm
- Roundness accuracy <math>< 0.4 \mu\text{m}</math>
- Lower part with fine adjustment $\pm 0.01^\circ$




C-AXIS 200 (OPTIONAL)

- For non-circular workpieces
- For thread grinding




LOAD WITH CHUCKED WORK

- 320 Nm with direct drive



WORK HEAD WITH DIRECT DRIVE 50

- For high-precision cylindrical grinding
- Rotating speed 1-3,000 rpm
- Roundness accuracy <math>< 0.4 \mu\text{m}</math>
- Lower part with fine adjustment $\pm 0.01^\circ$



LOAD WITH CHUCKED WORK

- 100 Nm with direct drive



ONE-OF-A-KIND KINEMATICS

- Reduction to two highly accurate linear and rotational axes each with positioning in nanoscale
- No auxiliary axes are necessary for dressers or measuring systems
- C-axis for non-cylindrical workpieces and thread grinding
- Simplified set-up and increased accuracy
- A compact machine with a wide range of parts of up to $\text{Ø } 300 \times 300 \text{ mm}$

HYDROLIN® - HIGH-DYNAMICS HYDROSTATIC LINEAR AXES

- Positioning accuracy in nanoscale
- The wear-free linear motors feature integrated heat dissipation

BASIS

- FEM-optimized casting bed for high stability and durability
- Mechanical separation of machine and periphery for thermal stability and prevention of vibrations

THE ULTIMATE INTERPLAY OF PRECISION & PERFORMANCE



ERGONOMICS


- Optically and ergonomically advanced design
- Good overview of the grinding process
- Centrally arranged and easily accessible interfaces for table constructions
- Swivel- and height-adjustable control panel for optimized usability
- Well thought-out accessibility for inexpensive maintenance and service

CNC CONTROL 31i-B

- 19" LCD color screen with touch function
- BLUE Solution teach-programming with OBJECT Guide for guided and easy program creation on workpiece
- Windows 10 IoT IPC operating system
- A handheld device with security and setup functions
- Ethernet (RJ45) and USB 2.0 connection


HYDROSTATIC B-AXIS

- Fully-fledged NC axis
- Pre-stressed hydrostatic guidance
- Direct drive




HYDROSTATIC X- / Z-AXIS

- Pre-stressed hydrostatic guidance
- No stick-slip, no wear
- The finest correction possibilities
- High form accuracy
- Direct drive



AUTOMATIC SLIDING DOOR

- Relief for the operator
- Faster workpiece changeover times




EASY TRANSPORTATION

- Forklift
- Hook lifting machine
- Fast and easy installation




AUTOMATION

- Profinet interface
- Loading cell with high autonomy
- Project-specific solutions on request




WORKPIECE HOLDER WITH DRESSING TURRET



WORKPIECE CARRIER

- Work head
- Max. 3 dressers
- Steady rests
- Power clamping device
- B2-axis




DRESSING UNITS

- Max. 3 dressers
- Up to 2 rotating dressers
- Firm dressing diamonds
- Form and profile rolls



STEADY RESTS

- Hydraulic steady rests
- 3-jaw steady rests




B2-AXIS

- Easy workpiece changeover
- Minimized dresser collision problematics
- Collision-free measuring position



INTEGRATED LIFTING SYSTEM

- Ergonomic Lifting system for table constructions




CONTACT SENSING

- Gap control with up to 4 sensors
- Operation and display integrated into the controller

WORKPIECE CARRIER

Various steady rests can be installed on the workpiece carrier, such as tracking hydraulic grinding steady rests. The integrated lifting system can be used for lifting table constructions. This saves the crane of the machine.

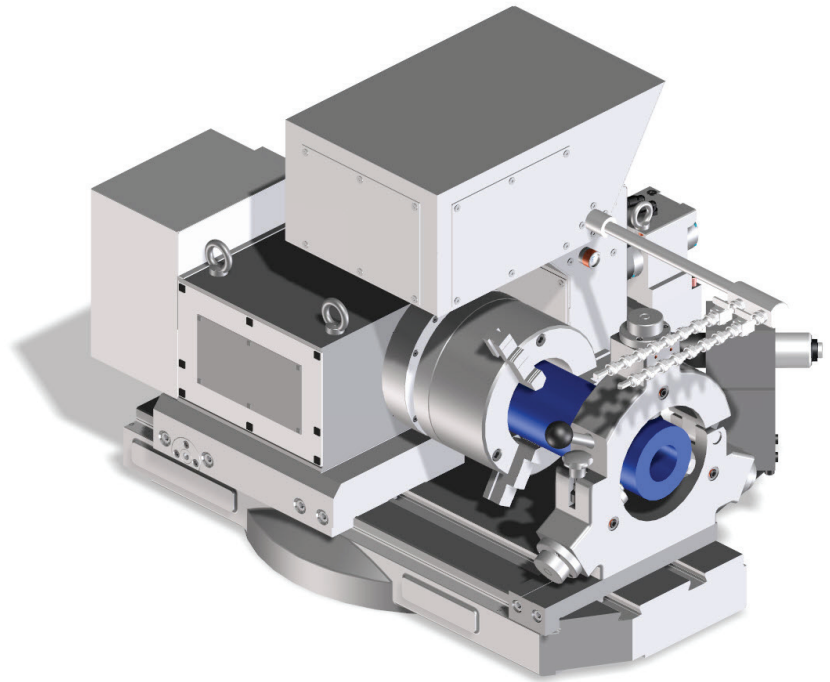

B2-AXIS ROTATING PART

An additional B2-axis can be added optionally on the workpiece carrier side. This offers the following advantages:

- Collision-free dressing
- Improved accessibility while measuring
- Easy workpiece changeover
- 3 dressing positions
- Automation of the loader system

The high-precision direct drive rotation axis can alternate between the grinding and dressing positions in < 2 seconds. The B2-axis has resolution of 1×10^{-8} degree and distortion-free clamping.


C-AXIS

With the possibility of X- and C-axis interpolation, VOUWARD 1000 allows grinding of non-cylindrical forms such as polygons, free contours and eccentrics. The rotary encoder with resolution of 1×10^{-7} degree is installed directly on the work head. The non-circular motion is superimposed onto the grinding motions, so that the grinding machine can fall back on any grinding cycle including handwheel release for the X-axis.

EXTERNAL & INTERNAL GRINDING / ROTATING PARTS / EQUIPMENT

WHEEL HEAD

The modular construction of the turret wheel head allows the 4 grinding spindle positions to be specified individually. The Internal grinding wheels measure up to max. \varnothing 150 x 40 mm. The external grinding wheels up to \varnothing 300 x 40 mm. Thanks to the flexible equipment, inside and outside diameters can be ground as well as flat surfaces.

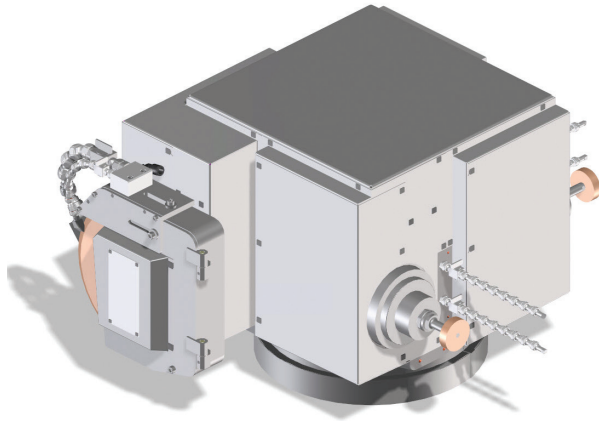

B1-AXIS ROTATING PART

A high-precision rotating axis is installed for faster positioning of the wheel head. Workpiece changeover lasts < 2.5 seconds. The B1-axis with direct drive has a resolution of 1×10^{-8} degree and distortion-free clamping.

With the B1-axis, up to 4 grinding spindle positions can be swiveled to the grinding position. Additionally, a fixed tactile measuring probe attached to the base body can be used for measurement tasks. The tactile measuring probe can measure internal and external diameters, shoulder positions and shoulder distances.


WORKPIECE MEASUREMENT SYSTEM

Automatic grinding wheel measurement. When swiveling the wheel head into the desired angular positions, the positions of the grinding wheel edges are automatically calculated. This offers the following advantages for the user:

- Programming with the effective masses according to the workpiece drawing and regardless of the swivel angle of the wheel head
- Renewed calibration of the swiveled grinding wheel is not required
- Simple and quick recording of the grinding wheel data when re-equipping the machine
- Workpiece management for external, surface and internal grinding is already integrated


TURRET WHEEL HEAD

- Individually configurable
- Compact
- 4 spindle positions
- FEM optimization
- Aluminum cooling-line




INTERNAL GRINDING EQUIPMENT

- Oil-air lubricated HF internal grinding spindle of max. 120,000 rpm (depending on the spindle)
- Powerful and universal
- With or without process coolant through internal grinding spindle
- Grinding wheel measurements up to \varnothing 150 x 40 mm




EXTERNAL GRINDING EQUIPMENT

- External grinding with water-cooled motor spindles and 12.7 kW performance
- Oil-air lubrication guarantees long durability
- Grinding wheel measurements up to \varnothing 300 x 40 mm




TACTILE MEASURING HEAD

- Mounted on the wheel head
- Orientation of the workpiece position in X-, Z- and C-position
- Active measurement of the diameter and length



BALANCING


- Mounted on the wheel head




FANUC CONTROL SYSTEM 31i-B WITH KELLENBERGER HMI

The BLUE Solution user interface from KELLENBERGER has the central focus on simple and intuitive operation. All interactions are carried out by gestures on the 19" touch display. The latest generation of a reliable FANUC 31i-B control runs in the background.

BLUE SOLUTION

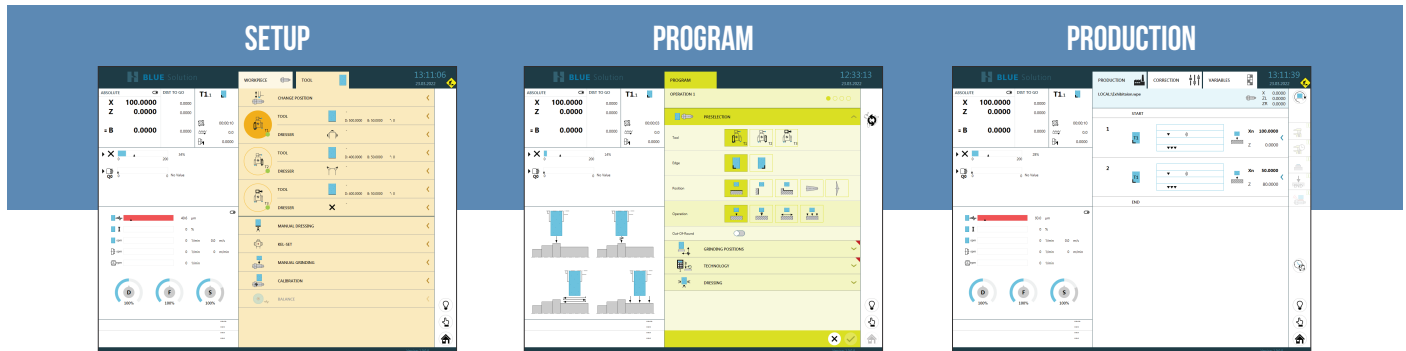



The user interface was developed explicitly for grinding by our specialists in cooperation with customers. BLUE Solution supports users regardless of their level of experience in all important steps from setup to production.

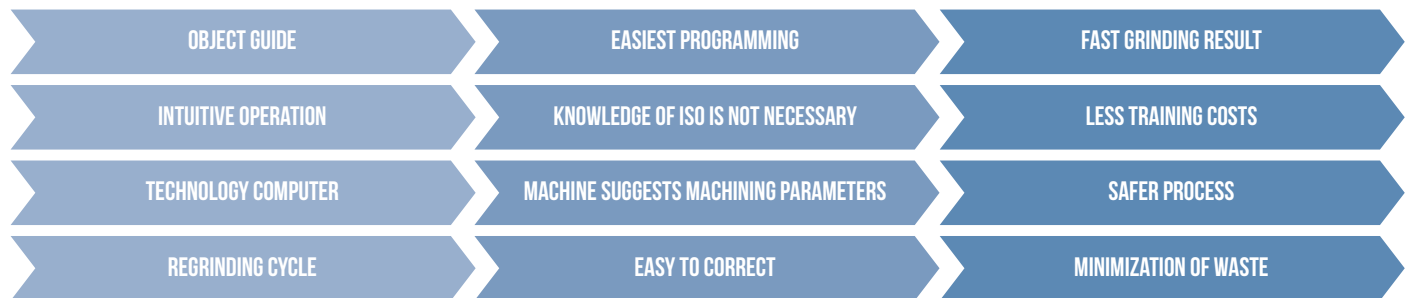

BLACK CAM SOLUTION

With the additional BLACK CAM Solution software, NC programs for grinding and dressing of profiles and threads can be generated, simulated and analyzed.

The CAD-CAM software supports the structured creation, processing and management of all documents belonging to a workpiece.

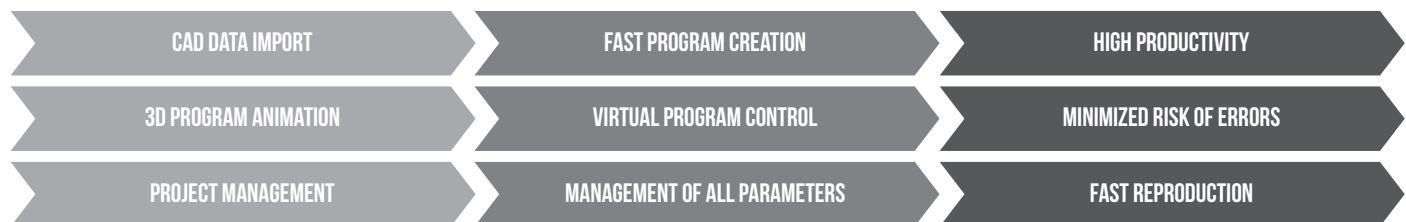

INDUSTRY 4.0

The Security Interface ensures communication according to the highest IT security standard between the machine and the production network.

The optional Remote Diagnostic module simplifies efficient diagnosis in case of service and thus reduces downtimes.


The machine is prepared for Industry 4.0. With the ComGateway, which has a standard OPC-UA server, extensive information on process and machine status can be exchanged.



Characteristics		
Max. workpiece length	mm	300
Swing diameter	mm	<300
Max. workpiece diameter	mm	<150 / <300
Supply voltage	V	400 / 460
Power consumption	A	35 - 80
Atmospheric pressure	bar	5.5
Total weight	kg	5,800
Floor loading	N/m ²	8,100
X- / Z-axis		
Travel	mm	450
Speed	m/min	<20
Resolution	mm	2.5 x 10 ⁻⁶
B axis		
Instrument swivel range	°	330
Workpiece swivel range	°	225
Resolution	°	1 x 10 ⁻⁸
Turret wheel head		
Rotational speed range (depending on the spindle)	rpm	<120,000
Max. number of spindles	-	4
Peripheral speed	m/s	50
Internal grinding wheel	mm	max. 150x40
Max. internal grinding length	mm	250
Mounting hole of the internal grinding spindle	mm	150
External grinding wheel	mm	300x40
Max. external grinding length	mm	150
Work head		
Rotational speed range	rpm	1-1,000 / 1-3,000
Mounting cone	-	MK5 / -
External short taper adapter	-	ISO 702-1: Size 5 / size 3
Workpiece weight	kg	<200 / <50
Load on chucked work	Nm	<320 / <100
Resolution	°	1 x 10 ⁻⁷ /-
CNC controller		
FANUC		FANUC 31i-B

Information on dimensions, weight and construction is subject to changes

SETUP PLAN 300

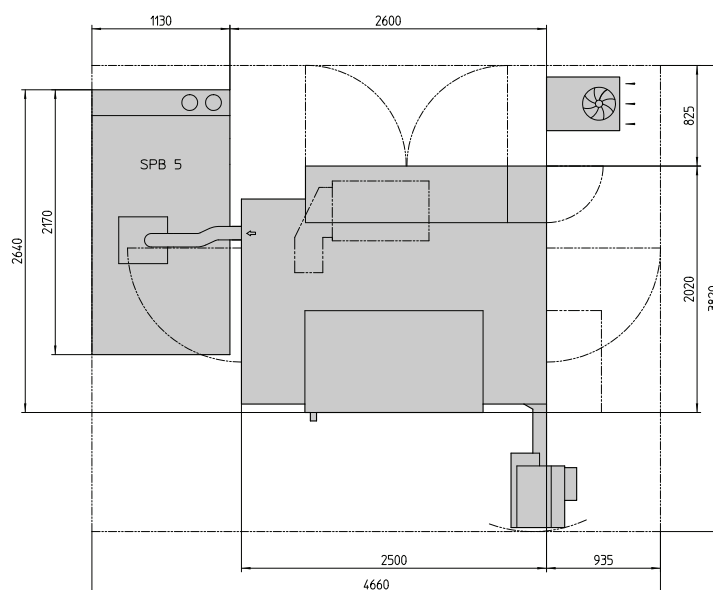



HARDINGE WORLDWIDE

Hardinge is a leading international provider of highly advanced machine tools and system solutions. We offer a comprehensive range of reliable CNC turning, milling and grinding machines as well as technologically advanced workpiece clamping systems.

Our advanced products are used in a variety of industries, including aerospace, agriculture, automotive, construction, energy, medical technology, transportation and more. We are a company with a strong global presence with manufacturing facilities in Europe, North America and Asia.

Hardinge uses its entire development and application know-how to always be able to offer your company the optimal machine tool solution and perfect service.

AMERICAS

Pennsylvania
Hardinge Corporate
1235 Westlakes Drive
Suite 410
Berwyn, PA 19312

New York
Hardinge
1 Hardinge Drive
Elmira, NY 14903
P. 800.843.8801
E. info@hardinge.com
www.hardinge.com

Illinois
Hardinge
1755 Britannia Dr
Unit 1A
Elgin, IL 60124
P. 800.843.8801

ASIA

China
Hardinge Machine
(Shanghai) Co. Ltd.
1388 East Kangqiao Road
Pudong, Shanghai 201319
P. 0086 21 3810 8686

Taiwan
Hardinge Taiwan Precision
Machinery Limited
4 Tzu Chiang 3rd Road
Nan Tou City, 540 Taiwan
P. 886 49 2260 536
E. cs@hardinge.com.tw

EUROPE

Switzerland
L. Kellenberger & Co. AG
Heiligkreuzstrasse 28
CH 9008 St. Gallen
Switzerland
P. 41 71 2429111
E. info@kellenberger.net

Germany
Hardinge GmbH
Fichtenhain A 13c
47807 Krefeld
P. 49 2151 49649 10
E. info@hardinge-gmbh.de

France
Jones & Shipman SARL
8 Allee des Ginkgos
BP 112-69672
Bron Cedex, France

United Kingdom
DF Precision Machinery
Ltd
Brigemere Farm, Mowsley
lane, Walton,
Lutterworth, LE17 5RE,
Tel +44 (0) 116 201 3000
E. sales@dfpmach.com
www.dfpmach.com



WWW.HARDINGE.COM

All prices and specifications are subject to change without notice. All brands marked with ® and ™ are trademarks of their respective owners. #1213_Voumard1000_EN © Hardinge Inc. • 03/2022