


Golf Cart Lok Mounting Instructions

Parts List

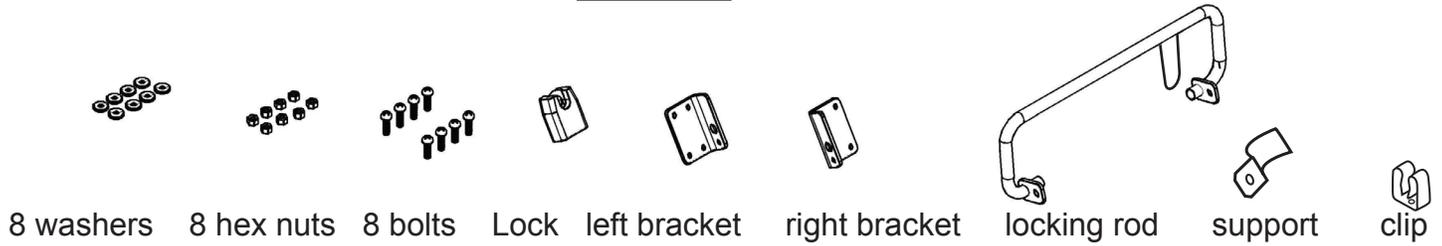


It is helpful to have two people to mount Golf Cart Lok. One to hold the unit in place while the other person checks the clearances and drills the mounting holes.


Note ** use grease on the mounting bolts to prevent the nuts from seizing to the bolts when installing.

Position Golf Cart Lock before drilling mounting holes


Have someone help hold the brackets to the floor for positioning

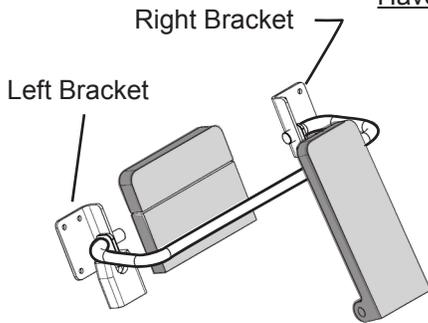

Depress brake pedal in parking brake position. Assemble Cart Lock as shown and position with locking bar over brake pedal and under gas pedal. Note** On Club cars, brake must be in bottom most position.

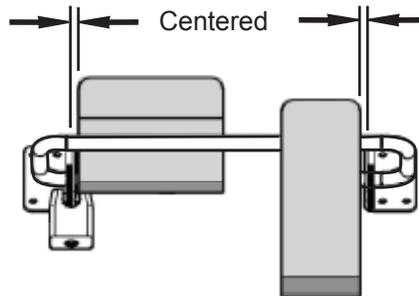

Center unit left-to-right between pedals. **Keep locking bar level.**

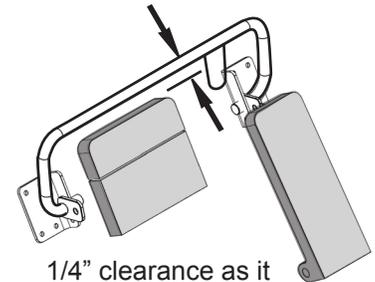

1/4" clearance as it swings by pedal


To locate vertically, remove lock. While holding brackets against the floor, rotate locking rod up and down so that it clears brake pedal by about 1/4".

Drill mounting holes

While holding the Golf Cart Lok in the proper position, use a 1/4" drill bit for the mounting holes. Drill through the holes in the mounting brackets, using them as a drill guide. Use grease on the mounting bolts to prevent the nuts from seizing to the bolts when installing. Drill one hole, insert a bolt. Drill a second hole and insert another bolt. Tighten the bolts just enough to be snug. Do this for both left and right mounting brackets. Be sure to hold locking bar level through this process. Drill remaining holes and insert bolts. Do not over-tighten hex nuts.

Support (EZ GO carts only)

Support clip goes on the under side. It attaches to one of the bolts on the left bracket and goes around the golf cart frame rail for added support.

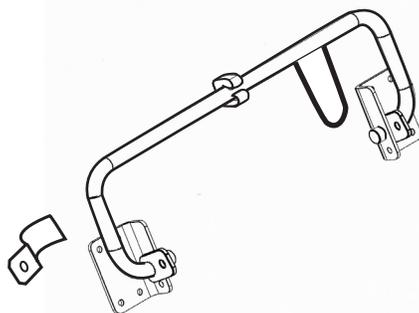

Mount retaining clip

A retaining clip is supplied to keep the locking bar from falling in the way of the pedals when not in use. Position the clip anywhere along the locking bar. Hold in place and drill a 3/16 diameter hole through the mounting hole of the clip. Attach to floor with 3/16 bolt. Secure with hex nut from the underside of the golf cart.