


2835 LED STRIPS

24V CONSTANT VOLTAGE

FEATURES:


- Double copper layer
- Can be cut every segment 2.5 cm
- Height 10 cm
- Each segment with couple pads for secondary operation
- 5 years warranty
- 3M adhesive 200MP provides exceptional temperature and chemical resistance

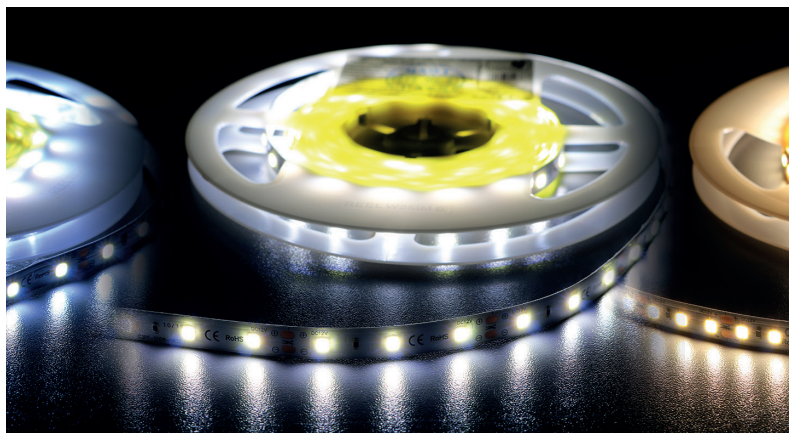


SPECIFICATIONS

Model	LED type	Power	Current	Colour temp.	Luminous flux	Width
GTI2835006-24V-2K-IP20	60 x 2835	6W/m	0.5A / m	2700K Warm white	480-510 lm/ m	8 mm
GTI2835006-24V-3K-IP20				3000K Warm white		
GTI2835006-24V-4K-IP20				4000K Neutral white		
GTI2835006-24V-6K-IP20				6000K Cold white		
GTI2835009-24V-2K-IP20	120 x 2835	9.6W/m	0.8A / m	2700K Warm white	840-1020 lm/ m	8 mm
GTI2835009-24V-3K-IP20				3000K Warm white		
GTI2835009-24V-4K-IP20				4000K Neutral white		
GTI2835009-24V-6K-IP20				6000K Cold white		
GTI2835012-24V-2K-IP20	60 x 2835	12W/m	1A / m	2700K Warm white	1020-1260 lm/ m	10 mm
GTI2835012-24V-3K-IP20				3000K Warm white		
GTI2835012-24V-4K-IP20				4000K Neutral white		
GTI2835012-24V-6K-IP20				6000K Cold white		


GTI2835006-24V-2K-IP20



GTI2835009-24V-2K-IP20



GTI2835012-24V-2K-IP20




2835 LED STRIPS

24V CONSTANT VOLTAGE

FEATURES:


- Double copper layer
- Can be cut every segment 2.5 cm
- Height 10 cm
- Each segment with couple pads for secondary operation
- 5 years warranty
- 3M adhesive 200MP provides exceptional temperature and chemical resistance

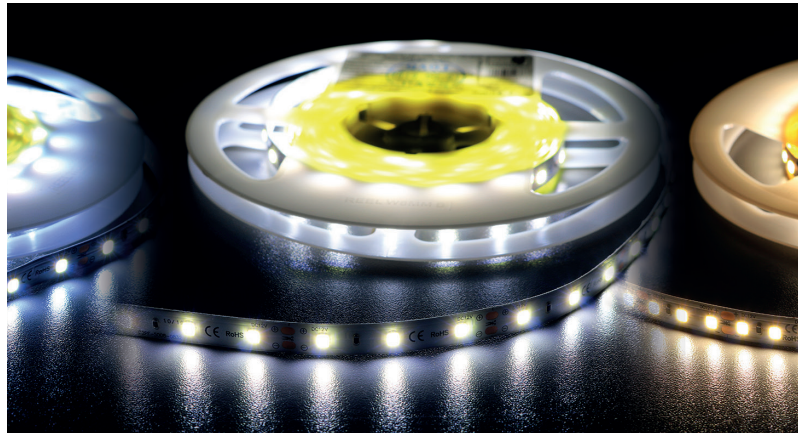


SPECIFICATIONS

Model	LED type	Power	Current	Colour temp.	Luminous flux	Width
GTI2835006-24V-2K-IP65	60 x 2835	6W/m	0.5A / m	2700K Warm white	480-510 lm/ m	8 mm
GTI2835006-24V-3K-IP65				3000K Warm white		
GTI2835006-24V-4K-IP65				4000K Neutral white		
GTI2835006-24V-6K-IP65				6000K Cold white		
GTI2835009-24V-2K-IP65	120 x 2835	9.6W/m	0.8A / m	2700K Warm white	840-1020 lm/ m	8 mm
GTI2835009-24V-3K-IP65				3000K Warm white		
GTI2835009-24V-4K-IP65				4000K Neutral white		
GTI2835009-24V-6K-IP65				6000K Cold white		
GTI2835012-24V-2K-IP65	60 x 2835	12W/m	1A / m	2700K Warm white	1020-1260 lm/ m	10 mm
GTI2835012-24V-3K-IP65				3000K Warm white		
GTI2835012-24V-4K-IP65				4000K Neutral white		
GTI2835012-24V-6K-IP65				6000K Cold white		

GTI2835006-24V-2K-IP65



GTI2835009-24V-2K-IP65

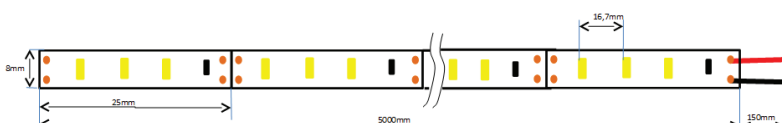

GTI2835012-24V-2K-IP65

