


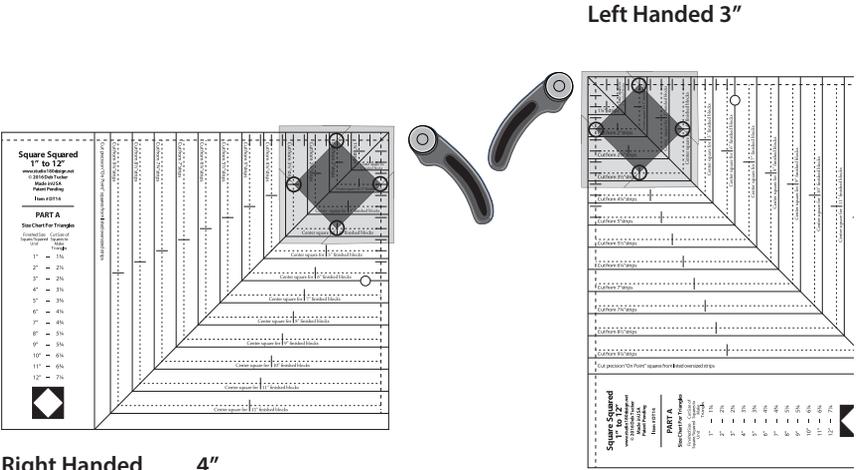


- Now, **trim the unit before adding the next round of triangles**, to do this you will need Large Square Squared, Part A. Locate the (3", 4", 5") Center Square size lines that you'll need on the tool **marked Part A**. You'll also want to locate the halfway registration points for that size.
- Place the tool on the pieced section **aligning the halfway registration points and the dashed 1/4" line with the sewn seam intersections**. See diagram.

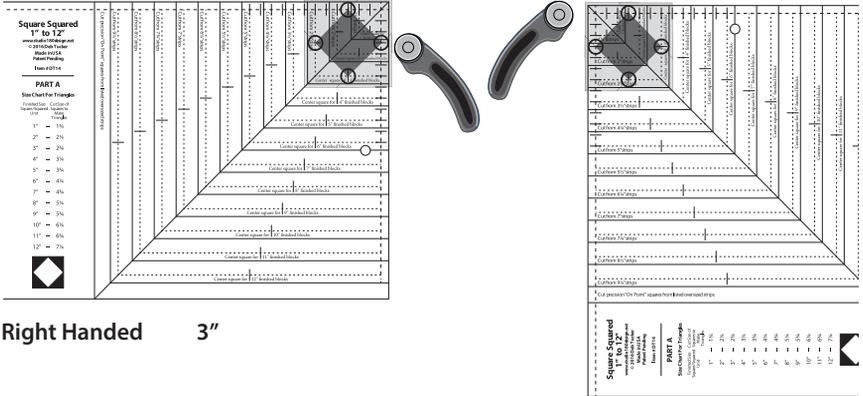

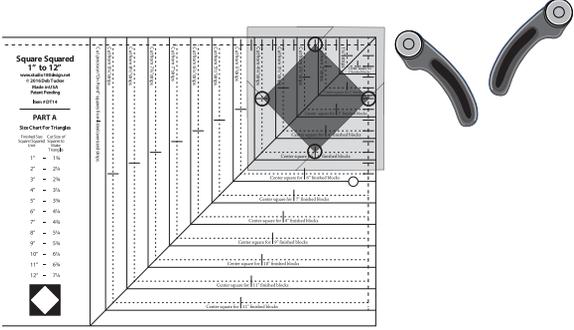


Right Handed 5"

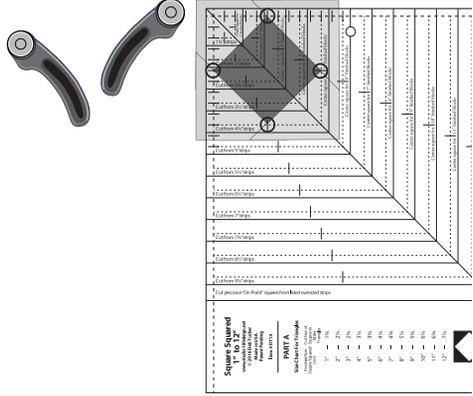


Left Handed 5"

29. Trim the up the side and across the top, cleaning up the first corner, then rotate pieced section 180°. Reposition tool and trim again. Note you'll always be aligning the registration points with the seam intersections, but for the second trim you should also align the solid lines with the previously trimmed fabric edges.

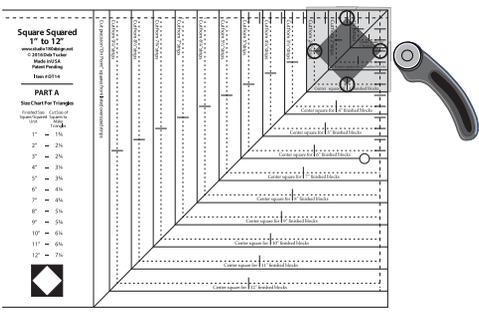

Right Handed 3"

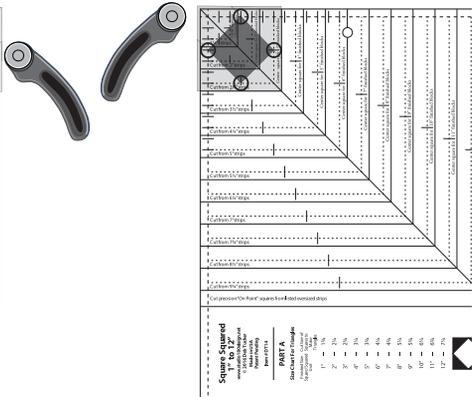

Left Handed 3"

