

TFT LCD COLOR MONITOR

BMG7030HDMI



Operating Instructions

Before Operating This Unit, please read the instructions completely

Function of report controller

1. Power on/off Button

Press to turn the monitor on and off.

2. Video Select Button

Toggles between all the available input sources.

3. Menu Select Button

Press to see an on-screen menu of the monitor


4. ► Button

press to increase the other parameter

5. MIRROR Button(16:9/4:3)

6. ◀ Button

press to decrease the other parameter

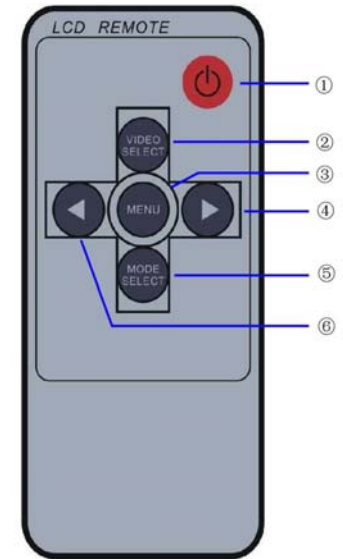

Function parameter

Screen size:	7 inch (16: 9)
Power:	DC12V
Consumption:	6 W
System:	PAL&NTSC
Signal:	AV/HDMI/VGA
Resolution:	1024(RGB) X 600 Pixel
Viewing angle:	60/50/60/60
Luminance:	300 cd/m2
Operation Temperature:	-20 ~70°

Appearance and function



Key Lutronductory

1. IR window
2. Standby / Power
3. Function up
4. Function down
5. Menu
6. Picture Mirror
7. Video switch

Equipment Size

