



Don't worry... be happy!



SAFETY FOOTWEAR

collection 2025 - 2026



**THE MOST
COMFORTABLE
SAFETY SHOES**





U-POWER VISION

U-POWER GROUP S.P.A. is an ever evolving company that is constantly reinventing and developing, while remaining true to itself.

We like to think that every day can be the beginning of something wonderful. A new challenge, a new opportunity, an unexpected situation that puts us to the test and allows us to show our full value.

We are convinced that positive thinking is not an illusion, but a concrete way to face life with a smile, self-confidence and a strong belief in one's own abilities.

We make room for creativity and inventiveness. We believe in the ability to unleash creativity and combine it with the need for advanced technology and the most innovative materials to create solutions that can protect and improve the lives of the workers who wear our products, all strictly according to an Italian design.

U-POWER MISSION

U-Power Group was created with the aim of becoming the safest and most authentic point of reference for workers' safety, thus contributing to improving people's quality of life through safe, comfortable, innovative and distinctively designed Protective Equipment.

INNOVATION:

An innovative approach to the design of safety shoes as well as technical workwear, continuous research and a quick response to market needs are key to maintaining a strong grip on both distribution and up-selling.

UNIQUENESS:

Constant commitment to Research & Development and a totally Made in Italy design make the Group's brands immediately recognisable and unique in terms of applied technology and style.

BRAND RECOGNISABILITY:

Creating brand awareness directly in the end consumer by communicating quality and design features and a sense of exclusivity.

Our philosophy Don't worry... be happy! reflects our Mission, which has always been our commitment to those who wear U-POWER: each shoe is a guarantee of true comfort and functionality under the sign of true Italian design.

Franco Uzzeni
President

Franco Uzzeni




Modern production establishments



OUR TECHNOLOGIES

A Revolution in Safety Footwear

Originally developed for the world of sport, Infinergy® represents a true breakthrough in innovation—now transforming the safety footwear industry. Thanks to its cutting-edge cushioning technology, Infinergy® delivers an exceptional energy rebound, outperforming traditional midsoles in comfort, durability, and performance.

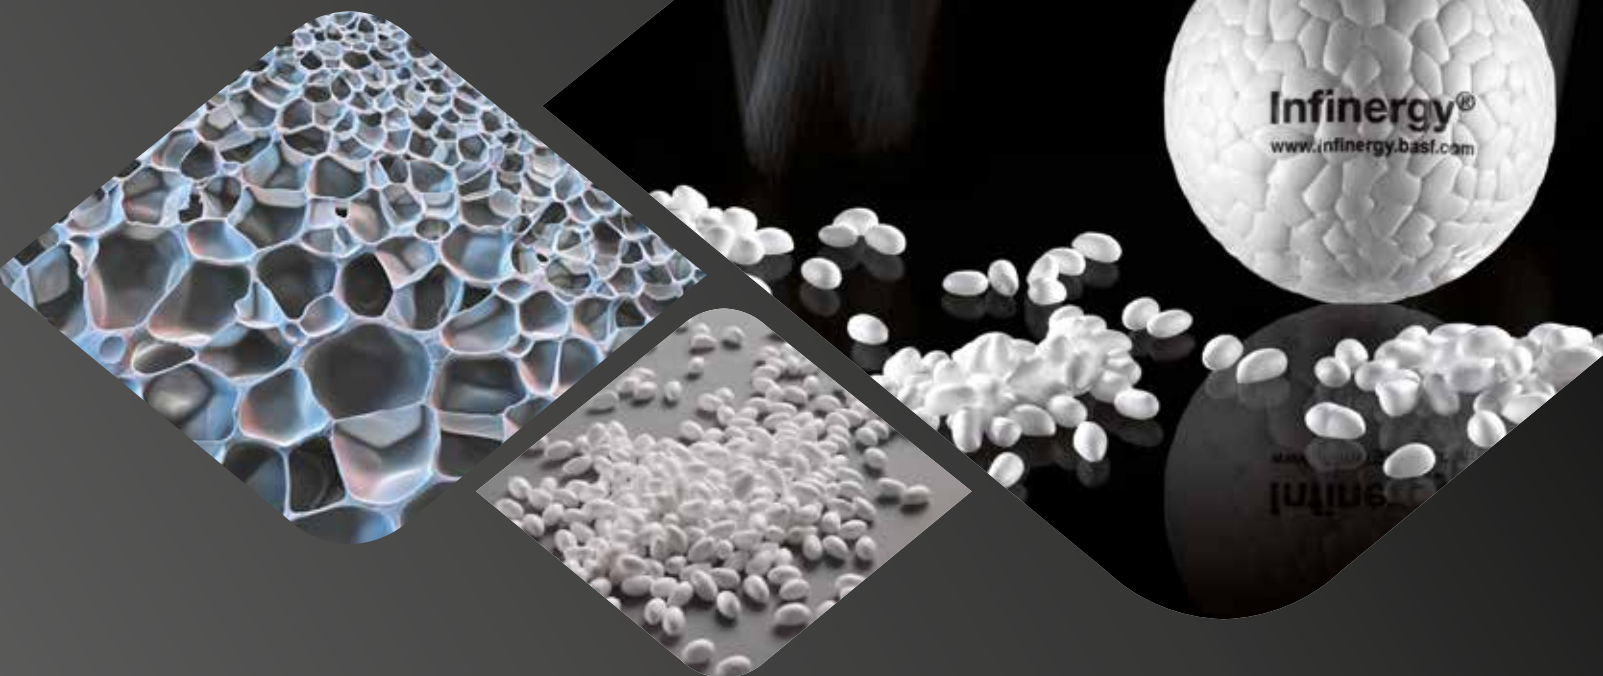

INFINERGY® SUPPORTS YOU EVERY STEP OF THE WAY.



OUR TECHNOLOGIES


55%
ENERGY RETURN

Infinergy®

Made with
Infinergy®
by BASF



ENERGY RETURN PER MATERIAL

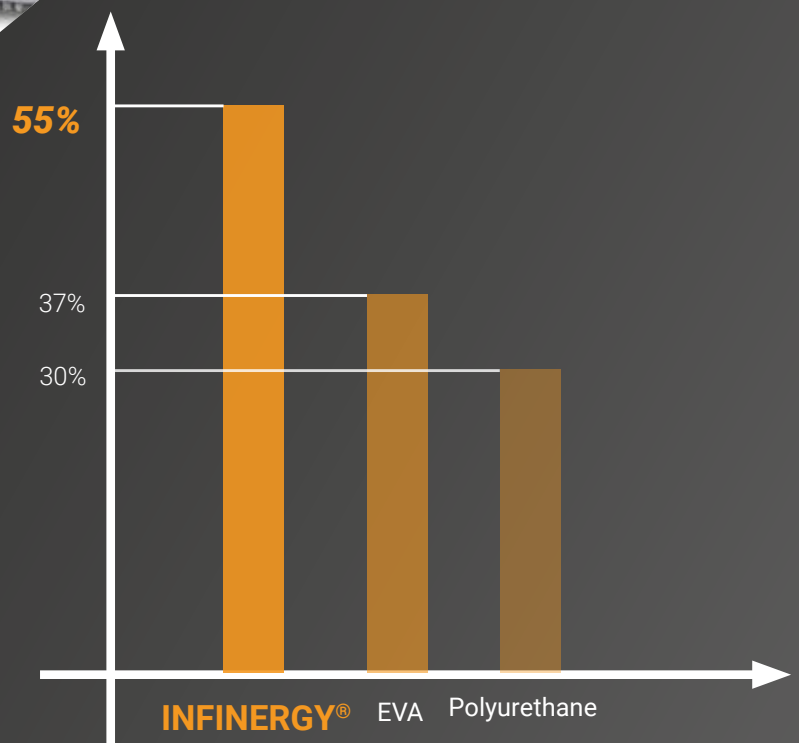

GREAT FLEXIBILITY

HIGH RESILIENCE

FLEXIBILITY AND LIGHTNESS

LOW DENSITY

HIGH IMPERMEABILITY

RESISTANCE TO WIDE TEMPERATURE
CHANGES (+40 °C TO -20 °C)

55% HIGHER REBOUND COEFFICIENT

Why Infinergy®:

Superior Energy Return: Infinergy® midsoles store and release energy like a spring.

How It Works:

Upon impact, the material compresses to absorb pressure. It instantly returns to its original shape, releasing energy back to the user. This is the rebound effect—a fast and powerful return of energy with every step.

This results in:

- Less fatigue
- Greater freedom of movement
- Reduces strain
- Lighter steps and prolonged comfort

Proven Performance:

U-Power footwear with Infinergy® delivers up to 55% energy return, helping workers perform better and feel better—especially in physically demanding environments.

OUR TECHNOLOGIES



U-Power energizing sole units

U-Power's patented energizing sole units feature a direct-attach dual density PU construction enhanced with Infinergy® midsole by BASF.

This exclusive design delivers outstanding energy return, superior shock absorption, and lasting comfort, combining responsiveness and stability to keep you feeling energized and protected all day long.

55% ENERGY RETURN

Infinergy® by BASF delivers dynamic cushioning and exceptional rebound with every step.

DIRECT-ATTACH PU CONSTRUCTION

Advanced dual-density polyurethane injection for enhanced durability, flexibility, and long-lasting comfort.

SRO CERTIFIED GRIP

Tested to the highest ASTM standards for superior slip resistance on oily and wet surfaces.



90° BLOCK PROFILE

Straight-edge lugs improve ground adhesion and grip performance.

MULTILEVEL STABILISING CHANNELS

Designed to enhance anti-slip properties and promote secure footing on uneven surfaces.

PREFORMED HEEL

Versatile design for added support, comfort, and multi-surface adaptability.

Slip, Oil & Abrasion Resistant



DIFFERENTIAL HEIGHT TREAD ZONES

Variable-depth lugs improve grip on surfaces from smooth floors to rough terrain.

DYNAMIC SELF-CLEANING CHANNELS

Angled grooves quickly eject liquids and debris to prevent clogging and slipping.

90-DEGREE HEEL

Raised heel improves grip on ladders, slopes, and during sudden stops.

MULTI-LEVEL STABILIZING RIBS

Integrated ribs boost slip resistance, flexibility, and stability on uneven or slick surfaces.

Slip, Oil & Abrasion Resistant

PU Direct Injection Technology

Direct attached soles, represent one of the most advanced and reliable methods of constructing safety footwear. This process involves directly injecting liquid polyurethane (PU) into a mold where it chemically bonds to the upper part of the shoe, forming the midsole and outsole in a single operation. The result is a highly durable, lightweight, and comfortable sole unit ideal for demanding work environments.

Key Advantages:

- Superior Bond Strength (No Glue or Stitching Required)
- Long-lasting and resistant to delamination
- Lightweight Comfort
- Excellent Flexibility
- Thermal Insulation
- No stiff seams or pressure points
- Slip, Oil & Abrasion Resistance



SAFETY TOE-CAP

The toe cap plays a vital role in protecting the toes from impacts and compression, ensuring overall foot safety. U-Power offers three high-performance materials: **Composite, Fiberglass, and Aluminium** each engineered for specific needs.



AIRTOE ALUMINIUM
(Average weight 1.9 oz)

Combining strength and low weight, the aluminium toe cap is perfect for applications requiring maximum impact protection with reduced bulk and a streamlined design.



AIRTOE COMPOSITE
(Average weight 1.76 oz)

Lightweight and metal-free, it provides excellent protection while maintaining thermal insulation and comfort. Ideal for environments with metal detectors.



FIBERTOE
(Average weight 1.83 oz)

Made from fiberglass, this toe cap offers a perfect balance between strength and lightness, making it suitable for prolonged wear. Ideal for environments with metal detectors.



niversal Fit width

Developed on U-Power's D/E width last, the U-niversal Fit sits perfectly between a regular D width and a wide E width fit. Inspired by the comfort of a relaxed fit, it offers **extra space in the forefoot and toe box** while maintaining a secure heel hold.

The result is a versatile fit that adapts naturally to most foot shapes, delivering **lasting comfort and support** throughout the workday.



ROOMIER TOE BOX
Extra space for natural toe movement and all-day comfort.

SECURE HEEL SUPPORT
Snug fit for superior stability and confident footing.

 **niversal Fit**

OUR TECHNOLOGIES



Unlike traditional steel midsoles, the Save & Flex PLUS non-metallic midsole is lighter, more flexible, and safer. It can be stitched directly to the upper, ensuring complete protection across the entire sole area. U-POWER exclusively uses **Save & Flex PLUS** high-quality materials, offering certified pierce resistance up to **1200 N**.

Meets or exceeds ASTM Puncture Resistant Standards.



SAVE&FLEX PLUS

**100%
protected
surface**

**NORM
270 lbs**



U-POWER ORIGINAL INSOLE



Personalized Comfort with Adaptive Insole

Engineered with **Soft Polyurethane Dynamic Compound**, co-developed with **BASF**, our advanced arch structure delivers **adaptive cushioning** that automatically adjusts to the contours of your foot. This ensures **optimal weight distribution** and long-lasting comfort throughout the day.


Get your perfect fit!

To meet every foot's unique needs, U-Power developed a **3-insole width system** for our Red Fit boots — allowing you to choose the ideal level of support and cushioning for your individual foot shape.

KEY BENEFITS:

- **Adaptive fit** that molds to different foot profiles
- **Balanced pressure distribution** for superior comfort
- **Customized support** thanks to variable insole thickness

High-performance textile with excellent moisture-wicking properties for dry, comfortable feet.

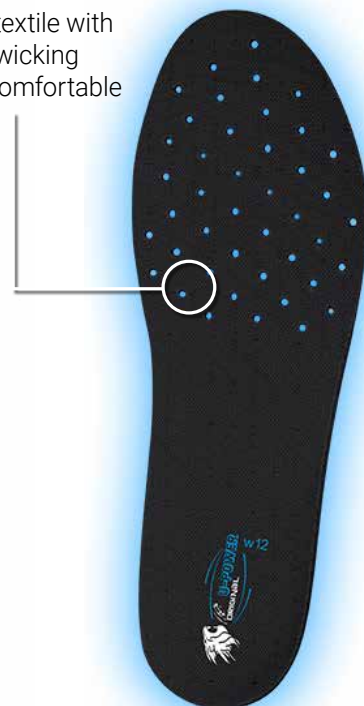

OUR TECHNOLOGIES



Delivering fit solutions purpose-built for performance, the BOA® Fit System is featured in products across industries (in medical, sports and workwear) and consists of three integral parts: a micro-adjustable dial, a super-strong lightweight lace and low friction lace guides.

Each unique configuration is engineered for effortless precision delivering a connected, fast, customized and durable fit, and is backed by The BOA Guarantee.



**INCREASED SPEED
& ENDURANCE**



**IMPROVED
STABILITY**



**ENDURANCE
AND HEALTH**



**EXPLOSIVE DIRECTION
CHANGES**

BREATHABLE 3D LINING




HONEYCOMB STRUCTURE



WingTex® features a revolutionary 3D air tunnel structure that enhances airflow throughout the shoe, ensuring exceptional breathability and lasting comfort. The high-density microcells within the lining promote rapid moisture absorption and release, keeping the foot cool, dry, and fresh even during long hours of use.

This advanced design optimizes the shoe's internal climate, offering superior ventilation and a pleasant wearing experience in any working condition.

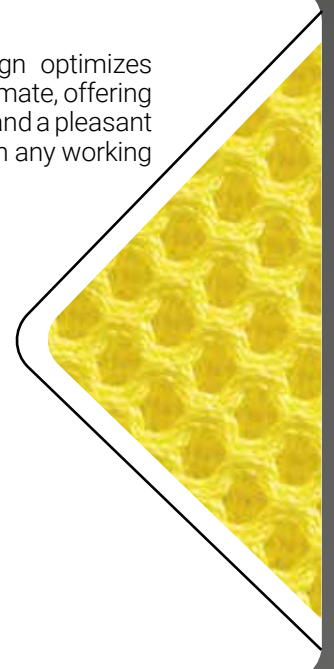

OUR TECHNOLOGIES


U DRYTECH



Leather

Membrane

Lining

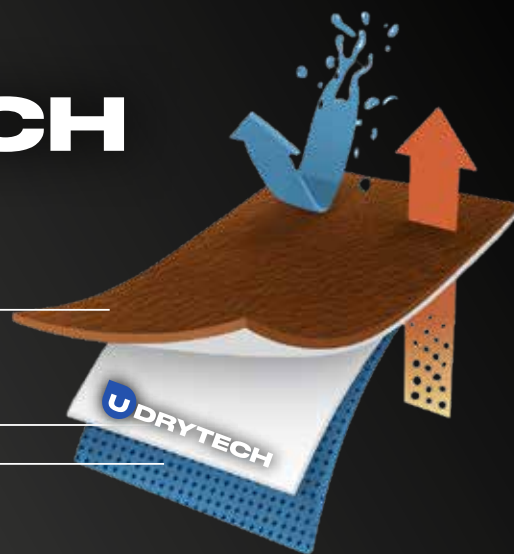

U-Power U-DRYTECH is an advanced waterproof and breathable membrane engineered to keep your feet dry and comfortable in any environment. The multi-layer microporous structure blocks water penetration from the outside while allowing heat and moisture to escape from the inside. Integrated directly into the boot lining, U-DRYTECH ensures total protection even in the harshest working conditions—combining lightweight comfort, durability, and long-lasting performance.



PU Tek® technology
HYPERTEX

PU Tek technology uses a new concept of threads with super high resistance to abrasion, directly woven in high resistance fabric to achieve textiles with ultimate mechanical performances!



ABRASION
RESISTANT



HIGH
BREATHABILITY



LIGHTWEIGHT



FLEXIBLE



DURABLE




designed in
HD
High Definition



**PVC
FREE**


**HIGH TENACITY
POLYESTER CORE**



**EXTERNAL
PU COATING**



PU Tek **PLUS***
HYPERTEX technology



PU Tek **HD**
HYPERTEX technology

OUR TECHNOLOGIES

ASTM F2413-24 The official standard for safety toe protective footwear in the United States



PR - Sole Puncture Resistant

PR Puncture-resistant insole is a specialized shoe insert designed to protect feet from sharp objects like nails, glass, and metal. Constructed with a composite plate embedded in the middle of the sole to create a barrier against punctures. The primary aim is to provide an extra layer of safety for workers and outdoor enthusiasts by preventing serious foot injuries caused by stepping on hazards. Meets or exceeds the ASTM F2413 standard for puncture resistance.



EH - EH Rated

EH Footwear that provides a source of protection to the wearer from electrical shock in environments where the wearer may accidentally step on a live wire or charged electrical equipment.



SD -Static Dissipative

SD 35 A type of electrostatic dissipative (ESD) safety footwear that is designed to safely discharge static electricity from the wearer's body, meeting specific voltage resistance thresholds between 1 and 35 megaohms. Its aim is to provide a safe environment in areas where static discharge could be hazardous, such as electronics manufacturing or computer chip assembly, by minimizing risks to sensitive equipment and personnel.



I - Toe Impact Resistant

C - Toe Compression Resistant

I-C Safety footwear comprising of a toecap that meets or exceeds the ASTM F2413 standard for impact and compression.



SR - Slip Resistant

SR Soles designed to provide a high coefficient of friction with the walking surface to improve slip resistance.



SRO - Slip Resistant

SRO Slip Resistant on Oily surfaces- soles designed and tested to provide a high coefficient of friction with the walking surface to improve slip resistance in dry, wet and oily wet conditions.




WP - Waterproof

WP Safety footwear is a type of work boot with waterproof membrane and water-resistant uppers, designed to keep feet dry in wet conditions.



METAL FREE Footwear that contains zero metal. 100% metal free. Ideal for jobs that require working in environments with sensitive metal detectors.

Size Chart

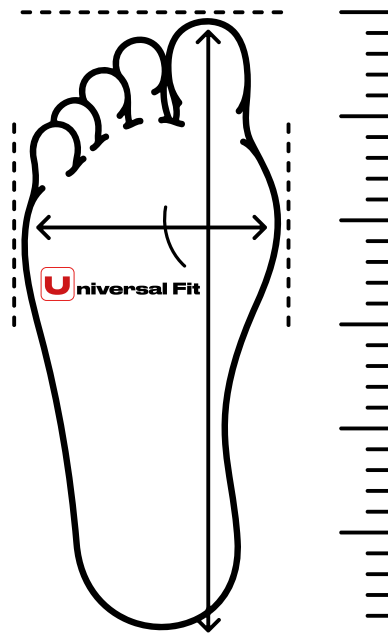

US MEN	US WOMEN	EU	CM
3.5	5	35	22.1
4.5	6	36	22.8
5	6.5	37	23.5
5.5	7	37.5	24.2
6	7.5	38	24.8
6.5	8	39	25.2
7	8.5	39.5	25.5
7.5	9	40	25.8
8	9.5	40.5	26.2
8.5	10	41	26.8
9	10.5	42	27.1
9.5	11	42.5	27.5
10	11.5	43	28.1
10.5	12	44	28.5
11	12.5	44.5	28.8
11.5	13	45	29.5
12	13.5	46	30.2
13	14.5	47	30.8
14	15.5	48	31.5

		STYLE/COLOR	SIZE	FEATURES
VALOR		UL10014 BLACK/BLACK page 22	3.5 - 12, 13, 14  niversal Fit	I/C EH SRO Aluminum Toe
SENTINEL		UL20014 BLACK/BLACK page 22	3.5 - 12, 13, 14  niversal Fit	I/C EH SRO Aluminum Toe
KEG		UL10194 TOBACCO/BLACK page 23	3.5 - 12, 13, 14  niversal Fit	I/C EH SRO Aluminum Toe
CASPER		UL20194 TOBACCO/BLACK page 23	3.5 - 12, 13, 14  niversal Fit	I/C EH SRO Aluminum Toe
BEDROCK		UL10034 CHARCOAL/SLATE page 24	3.5 - 12, 13, 14  niversal Fit	I/C EH SRO Aluminum Toe
VANGUARD		UL20034 CHARCOAL/SLATE page 24	3.5 - 12, 13, 14  niversal Fit	I/C EH SRO Aluminum Toe
TURBO		UL10026 BLACK/SLATE page 25	3.5 - 12, 13, 14  niversal Fit	I/C SD35 SRO Aluminum Toe
APEX		UL20026 BLACK/SLATE page 25	3.5 - 12, 13, 14  niversal Fit	I/C SD35 SRO Aluminum Toe

		STYLE/COLOR	SIZE	FEATURES
TRACE		UL20204 TOBACCO/BLACK page 26	3.5 - 12, 13, 14  Universal Fit	I/C SD35 SRO Aluminum Toe
PHANTOM		UL20166 BLACK/BLACK page 26	3.5 - 12, 13, 14  Universal Fit	I/C SD35 SRO Aluminum Toe
FLEXION		UL20086 CHARCOAL/ YELLOW page 27	3.5 - 12, 13, 14  Universal Fit	I/C SD35 SRO Aluminum Toe
REACTOR		UL20096 CHARCOAL/ GREEN page 27	3.5 - 12, 13, 14  Universal Fit	I/C SD35 SRO Aluminum Toe
STRICKER		UL20066 CHARCOAL/SLATE page 28	3.5 - 12, 13, 14  Universal Fit	I/C SD35 SRO Aluminum Toe
NEXOR		UL20076 NAVY/SLATE page 28	3.5 - 12, 13, 14  Universal Fit	I/C SD35 SRO Aluminum Toe
KINETIC		UL20056 SLATE/SLATE page 29	3.5 - 12, 13, 14  Universal Fit	I/C SD35 SRO Aluminum Toe
SHADOW		UL20176 BLACK/SLATE page 29	3.5 - 12, 13, 14  Universal Fit	I/C SD35 SRO Aluminum Toe

		STYLE/COLOR	SIZE	FEATURES
TEMPEST MF		UL10154 BLACK/BLACK page 32	3.5 - 12, 13, 14  Universal Fit	I/C EH SRO Composite Toe
DASH MF		UL20154 BLACK/BLACK page 32	3.5 - 12, 13, 14  Universal Fit	I/C EH SRO Composite Toe
MACH MF		UL20136 CHARCOAL/SLATE page 33	3.5 - 12, 13, 14  Universal Fit	I/C SD35 SRO Composite Toe
DARK MF		UL20186 BLACK/SLATE page 33	3.5 - 12, 13, 14  Universal Fit	I/C SD35 SRO Composite Toe
NEON MF		UL20146 CHARCOAL/ ORANGE page 34	3.5 - 12, 13, 14  Universal Fit	I/C SD35 SRO Composite Toe
VELOCITY MF		UL20116 GREY/YELLOW page 34	3.5 - 12, 13, 14  Universal Fit	I/C SD35 SRO Composite Toe
ARROW MF		UL20266 BLACK/BLACK page 35	3.5 - 12, 13, 14  Universal Fit	I/C SD35 SRO Composite Toe

RED FIT

		STYLE/COLOR	SIZE	FEATURES
BULWARK HF		UL10204 BLACK/BLACK page 40	7 - 12, 13, 14  Universal Fit	I/C EH PR SRO FiberToe WP = Waterproof
BARREL HF		UL10224 TOBACCO/BLACK page 40	7 - 12, 13, 14  Universal Fit	I/C EH PR SRO FiberToe WP = Waterproof
FORTRESS HF		UL10214 CHOCOLATE page 41	7 - 12, 13, 14  Universal Fit	I/C EH PR SRO FiberToe WP = Waterproof
TITAN HF		UL10244 BLACK/BLACK page 42	7 - 12, 13, 14  Universal Fit	I/C SD35 PR SRO FiberToe WP = Waterproof
ROANOKE HF		UL10254 CHARCOAL page 42	7 - 12, 13, 14  Universal Fit	I/C EH PR SRO FiberToe WP = Waterproof

SD 35 STATIC DISSIPATIVES

RED LION

		STYLE/COLOR	SIZE	FEATURES
TURBO		UL10026 BLACK/SLATE page 25	3.5 - 12, 13, 14  Universal Fit	I/C SD35 SRO Aluminum Toe
APEX		UL20026 BLACK/SLATE page 25	3.5 - 12, 13, 14  Universal Fit	I/C SD35 SRO Aluminum Toe
TRACE		UL20204 TOBACCO/BLACK page 26	3.5 - 12, 13, 14  Universal Fit	I/C SD35 SRO Aluminum Toe
PHANTOM		UL20166 BLACK/BLACK page 26	3.5 - 12, 13, 14  Universal Fit	I/C SD35 SRO Aluminum Toe
FLEXION		UL20086 CHARCOAL/YELLOW page 27	3.5 - 12, 13, 14  Universal Fit	I/C SD35 SRO Aluminum Toe
REACTOR		UL20096 CHARCOAL/GREEN page 27	3.5 - 12, 13, 14  Universal Fit	I/C SD35 SRO Aluminum Toe
STRICKER		UL20066 CHARCOAL/SLATE page 28	3.5 - 12, 13, 14  Universal Fit	I/C SD35 SRO Aluminum Toe
NEXOR		UL20076 NAVY/SLATE page 28	3.5 - 12, 13, 14  Universal Fit	I/C SD35 SRO Aluminum Toe
KINETIC		UL20056 SLATE/SLATE page 29	3.5 - 12, 13, 14  Universal Fit	I/C SD35 SRO Aluminum Toe
SHADOW		UL20176 BLACK/SLATE page 29	3.5 - 12, 13, 14  Universal Fit	I/C SD35 SRO Aluminum Toe

RED LION
METAL FREE

MACH MF		UL20136 CHARCOAL/SLATE page 33	3.5 - 12, 13, 14  Universal Fit	I/C SD35 SRO Composite Toe
DARK MF		UL20186 BLACK/SLATE page 33	3.5 - 12, 13, 14  Universal Fit	I/C SD35 SRO Composite Toe
NEON MF		UL20146 CHARCOAL/ORANGE page 34	3.5 - 12, 13, 14  Universal Fit	I/C SD35 SRO Composite Toe
VELOCITY MF		UL20116 GREY/YELLOW page 34	3.5 - 12, 13, 14  Universal Fit	I/C SD35 SRO Composite Toe
ARROW MF		UL20266 BLACK/BLACK page 35	3.5 - 12, 13, 14  Universal Fit	I/C SD35 SRO Composite Toe

RED
FIT

TITAN HF		UL10244 BLACK/BLACK page 42	7 - 12, 13, 14  Universal Fit	I/C SD35 PR SRO FiberToe WP = Waterproof
-----------------	---	--	--	--

EH - ELECTRICAL HAZARD RATED

RED LION

VALOR



STYLE/COLOR

UL10014
BLACK/BLACK
page 22

SIZE

3.5 - 12, 13, 14
 Universal Fit

FEATURES

I/C EH SRO
Aluminum Toe

SENTINEL



UL20014
BLACK/BLACK
page 22

3.5 - 12, 13, 14
 Universal Fit

I/C EH SRO
Aluminum Toe

KEG



UL10194
TOBACCO/BLACK
page 23

3.5 - 12, 13, 14
 Universal Fit

I/C EH SRO
Aluminum Toe

CASPER



UL20194
TOBACCO/BLACK
page 23

3.5 - 12, 13, 14
 Universal Fit

I/C EH SRO
Aluminum Toe

BEDROCK



UL10034
CHARCOAL/SLATE
page 24

3.5 - 12, 13, 14
 Universal Fit

I/C EH SRO
Aluminum Toe

VANGUARD



UL20034
CHARCOAL/SLATE
page 24

3.5 - 12, 13, 14
 Universal Fit

I/C EH SRO
Aluminum Toe

RED LION METAL FREE

**TEMPEST
MF**



UL10154
BLACK/BLACK
page 32

3.5 - 12, 13, 14
 Universal Fit

I/C EH SRO
Composite Toe

DASH MF



UL20154
BLACK/BLACK
page 32

3.5 - 12, 13, 14
 Universal Fit

I/C EH SRO
Composite Toe

RED FIT

**BULWARK
HF**



UL10204
BLACK/BLACK
page 40

7 - 12, 13, 14
 Universal Fit

I/C EH PR SRO
FiberToe
WP = Waterproof

BARREL HF



UL10224
TOBACCO/BLACK
page 40

7 - 12, 13, 14
 Universal Fit

I/C EH PR SRO
FiberToe
WP = Waterproof

**FORTRESS
HF**



UL10214
CHOCOLATE
page 41

7 - 12, 13, 14
 Universal Fit

I/C EH PR SRO
FiberToe
WP = Waterproof

**ROANOKE
HF**



UL10254
CHARCOAL
page 42

7 - 12, 13, 14
 Universal Fit

I/C EH PR SRO
FiberToe
WP = Waterproof



I - Toe Impact Resistant
C - Toe Compression Resistant



EH - EH Rated



SD - Static Dissipative



SRO - Slip Resistant

High-Performance Cushioning with Infinergy® E-TPU

The dual-density PU sole, made using direct injection technology, is enhanced with **Infinergy® E-TPU foam**—a revolutionary material composed of thousands of tiny air-filled cells.

These microcells absorb shock and deliver over **55% energy return** with every step, ensuring maximum comfort and reduced fatigue throughout the day.



- Standing for long periods
- Move in good conscience
- Walking up and down stairs repeatedly
- Repetitive stress
- Long periods kneeling or squatting
- Walking long distances

Next-Generation PU Technopolymer Outsole

Engineered for maximum grip, stability, and versatility:



Slip, Oil & Abrasion Resistant

RED LION

best for:

Athletic-style safety shoes engineered for maximum comfort, flexibility, and energy return. Ideal for high-mobility all-day use.

**Light-duty indoor/outdoor
and general-purpose work**



**More than 55% energy
return — tested for
all-day performance**

UL10014

VALOR

- **UPPER** Soft nubuck water resistant leather
- **LINING** 3D Mesh lining for superior breathability and moisture wicking
- **SAFETY TOE CAP** AirToe Aluminum, maximum protection with streamlined shape
- **FOOTBED** In soft polyurethane dynamic compound
- **SOLE** Direct-attach construction dual density PU with **Infinergy®** midsole Slip, Oil & Abrasion Resistant
- **Electrical Hazard Rated**
- **SIZE** 3.5-12,13,14 U-niversal Fit width
- **COLOR** black/black

ASTM F2413-24
I/C EH SRO



EH Rated



Aluminum Toe



SRO



**Infinergy® midsole with over
55% ENERGY RETURN**



UL20014

SENTINEL

- **UPPER** Soft nubuck water resistant leather
- **LINING** 3D Mesh lining for superior breathability and moisture wicking
- **SAFETY TOE CAP** AirToe Aluminum, maximum protection with streamlined shape
- **FOOTBED** In soft polyurethane dynamic compound
- **SOLE** Direct-attach construction dual density PU with **Infinergy®** midsole Slip, Oil & Abrasion Resistant
- **Electrical Hazard Rated**
- **SIZE** 3.5-12,13,14 U-niversal Fit width
- **COLOR** black/black

ASTM F2413-24
I/C EH SRO



EH Rated



Aluminum Toe



SRO



**Infinergy® midsole with over
55% ENERGY RETURN**



UL10194

KEG

- **UPPER** Pull-up full-grain water resistant leather
- **LINING** 3D Mesh lining for superior breathability and moisture wicking
- **SAFETY TOE CAP** AirToe Aluminum, maximum protection with streamlined shape
- **FOOTBED** In soft polyurethane dynamic compound
- **SOLE** Direct-attach construction dual density PU with **Infinergy®** midsole Slip, Oil & Abrasion Resistant
- **Electrical Hazard Rated**
- **SIZE** 3.5-12,13,14 U-niversal Fit width
- **COLOR** tobacco/black

ASTM F2413-24
I/C EH SRO



Airtoe
ALUMINIUM

Infinergy®

U-POWER
ORIGINAL

wingtex



Infinergy® midsole with over
55% ENERGY RETURN



EH Rated



Aluminum Toe



SRO

CASPER

UL20194

- **UPPER** Pull-up full-grain water resistant leather
- **LINING** 3D Mesh lining for superior breathability and moisture wicking
- **SAFETY TOE CAP** AirToe Aluminum, maximum protection with streamlined shape
- **FOOTBED** In soft polyurethane dynamic compound
- **SOLE** Direct-attach construction dual density PU with **Infinergy®** midsole Slip, Oil & Abrasion Resistant
- **Electrical Hazard Rated**
- **SIZE** 3.5-12,13,14 U-niversal Fit width
- **COLOR** tobacco/black

ASTM F2413-24
I/C EH SRO



Airtoe
ALUMINIUM

Infinergy®

U-POWER
ORIGINAL

wingtex



Infinergy® midsole with over
55% ENERGY RETURN



EH Rated



Aluminum Toe



SRO

UL10034

BEDROCK

- **UPPER** Pull-up full-grain water resistant leather
- **LINING** 3D Mesh lining for superior breathability and moisture wicking
- **SAFETY TOE CAP** AirToe Aluminum, maximum protection with streamlined shape
- **FOOTBED** In soft polyurethane dynamic compound
- **SOLE** Direct-attach construction dual density PU with **Infinergy®** midsole Slip, Oil & Abrasion Resistant
- **Electrical Hazard Rated**
- **SIZE** 3.5-12,13,14 U-niversal Fit width
- **COLOR** charcoal/slate

ASTM F2413-24
I/C EH SRO



EH Rated



Aluminum Toe



SRO



**Infinergy® midsole with over
55% ENERGY RETURN**



UL20034

VANGUARD

- **UPPER** Soft nubuck water resistant leather
- **LINING** 3D Mesh lining for superior breathability and moisture wicking
- **SAFETY TOE CAP** AirToe Aluminum, maximum protection with streamlined shape
- **FOOTBED** In soft polyurethane dynamic compound
- **SOLE** Direct-attach construction dual density PU with **Infinergy®** midsole Slip, Oil & Abrasion Resistant
- **Electrical Hazard Rated**
- **SIZE** 3.5-12,13,14 U-niversal Fit width
- **COLOR** charcoal/slate

ASTM F2413-24
I/C EH SRO



EH Rated



Aluminum Toe



SRO



**Infinergy® midsole with over
55% ENERGY RETURN**



UL10026

TURBO

- **UPPER** High abrasion resistant PUTEK® PLUS, water resistant and breathable
- **LINING** 3D Mesh lining for superior breathability and moisture wicking
- **SAFETY TOE CAP** AirToe Aluminum, maximum protection with streamlined shape
- **FOOTBED U-POWER original**
- **SOLE** Direct-attach construction dual density PU with **Infinergy®** midsole Slip, Oil & Abrasion Resistant
- **Static Dissapitive SD 35 Rated**
- **SIZE** 3.5-12,13,14 U-niversal Fit width
- **COLOR** black/slate

ASTM F2413-24
I/C SD 35 SRO



**Infinergy® midsole with over
55% ENERGY RETURN**



SD 35



Aluminum Toe



SRO

UL20026

APEX

- **UPPER** High abrasion resistant PUTEK® PLUS, water resistant and breathable
- **LINING** 3D Mesh lining for superior breathability and moisture wicking
- **SAFETY TOE CAP** AirToe Aluminum, maximum protection with streamlined shape
- **FOOTBED U-POWER original**
- **SOLE** Direct-attach construction dual density PU with **Infinergy®** midsole Slip, Oil & Abrasion Resistant
- **Static Dissapitive SD 35 Rated**
- **SIZE** 3.5-12,13,14 U-niversal Fit width
- **COLOR** black/slate

ASTM F2413-24
I/C SD 35 SRO



**Infinergy® midsole with over
55% ENERGY RETURN**



SD 35



Aluminum Toe



SRO

UL20204

TRACE

- **UPPER** Pull-up full-grain water resistant leather with textile inserts
- **LINING** 3D Mesh lining for superior breathability and moisture wicking
- **SAFETY TOE CAP** AirToe Aluminum, maximum protection with streamlined shape
- **FOOTBED** In soft polyurethane dynamic compound
- **SOLE** Direct-attach construction dual density PU with **Infinergy®** midsole Slip, Oil & Abrasion Resistant
- **Static Dissipative SD 35 Rated**
- **SIZE** from 3.5-12,13,14 U-niversal Fit width
- **COLOR** tobacco/black

ASTM F2413-24
I/C SD 35 SRO



Airtoe
ALUMINIUM

Infinergy®

U-POWER
ORIGINAL

wingtex



Infinergy® midsole with over
55% ENERGY RETURN



SD 35



Aluminum Toe



SRO

UL20166

PHANTOM

- **UPPER** Soft suede upper with textile inserts
- **LINING** 3D Mesh lining for superior breathability and moisture wicking
- **SAFETY TOE CAP** AirToe Aluminum, maximum protection with streamlined shape
- **FOOTBED** In soft polyurethane dynamic compound
- **SOLE** Direct-attach construction dual density PU with **Infinergy®** midsole Slip, Oil & Abrasion Resistant
- **Static Dissipative SD 35 Rated**
- **SIZE** 3.5-12,13,14 U-niversal Fit width
- **COLOR** black/black

ASTM F2413-24
I/C SD 35 SRO



Airtoe
ALUMINIUM

Infinergy®

U-POWER
ORIGINAL

wingtex



Infinergy® midsole with over
55% ENERGY RETURN



SD 35



Aluminum Toe



SRO

UL20086

FLEXION

- **UPPER** Soft suede upper with textile inserts
- **LINING** 3D Mesh lining for superior breathability and moisture wicking
- **SAFETY TOE CAP** AirToe Aluminum, maximum protection with streamlined shape
- **FOOTBED** In soft polyuethane dynamic compound
- **SOLE** Direct-attach construction dual density PU with **Infinergy®** midsole Slip, Oil & Abrasion Resistant
- **Static Dissapitive SD 35 Rated**
- **SIZE** 3.5-12,13,14 U-niversal Fit width
- **COLOR** charcoal/yellow
- **Interchangeable black laces included**



Infinergy® midsole with over 55% ENERGY RETURN



SD 35



Aluminum Toe



SRO

UL20096

REACTOR

- **UPPER** Soft suede upper with textile inserts
- **LINING** 3D Mesh lining for superior breathability and moisture wicking
- **SAFETY TOE CAP** AirToe Aluminum, maximum protection with streamlined shape
- **FOOTBED** In soft polyuethane dynamic compound
- **SOLE** Direct-attach construction dual density PU with **Infinergy®** midsole Slip, Oil & Abrasion Resistant
- **Static Dissapitive SD 35 Rated**
- **SIZE** 3.5-12,13,14 U-niversal Fit width
- **COLOR** charcoal/green



Infinergy® midsole with over 55% ENERGY RETURN



SD 35



Aluminum Toe



SRO

UL20066

STRICKER

- **UPPER** Soft suede upper with textile inserts
- **LINING** 3D Mesh lining for superior breathability and moisture wicking
- **SAFETY TOE CAP** AirToe Aluminum, maximum protection with streamlined shape
- **FOOTBED** In soft polyurethane dynamic compound
- **SOLE** Direct-attach construction dual density PU with **Infinergy®** midsole Slip, Oil & Abrasion Resistant
- **Static Dissapitive SD 35 Rated**
- **SIZE** 3.5-12,13,14 U-niversal Fit width
- **COLOR** charcoal/slate

ASTM F2413-24
I/C SD 35 SRO



**Infinergy® midsole with over
55% ENERGY RETURN**



SD 35



Aluminum Toe



SRO

NEXOR

UL20076

- **UPPER** Soft suede upper with textile inserts
- **LINING** 3D Mesh lining for superior breathability and moisture wicking
- **SAFETY TOE CAP** AirToe Aluminum, maximum protection with streamlined shape
- **FOOTBED** In soft polyurethane dynamic compound
- **SOLE** Direct-attach construction dual density PU with **Infinergy®** midsole Slip, Oil & Abrasion Resistant
- **Static Dissapitive SD 35 Rated**
- **SIZE** 3.5-12,13,14 U-niversal Fit width
- **COLOR** navy/slate

ASTM F2413-24
I/C SD 35 SRO



**Infinergy® midsole with over
55% ENERGY RETURN**



SD 35



Aluminum Toe



SRO

UL20056

KINETIC

- **UPPER** Ultra-breathable AIRNET and soft suede upper
- **LINING** 3D Mesh lining for superior breathability and moisture wicking
- **SAFETY TOE CAP** AirToe Aluminum, maximum protection with streamlined shape
- **FOOTBED** In soft polyurethane dynamic compound
- **SOLE** Direct-attach construction dual density PU with **Infinergy®** midsole Slip, Oil & Abrasion Resistant
- **Static Dissapitive SD 35 Rated**
- **SIZE** 3.5-12,13,14 U-niversal Fit width
- **COLOR** slate/slate

ASTM F2413-24
I/C SD 35 SRO



Airtoe
ALUMINIUM

Infinergy®

U-POWER
ORIGINAL

wingtex



Infinergy® midsole with over
55% ENERGY RETURN



SD 35



Aluminum Toe



SRO

SHADOW

UL20176

- **UPPER** Ultra-breathable AIRNET and soft suede upper
- **LINING** 3D Mesh lining for superior breathability and moisture wicking
- **SAFETY TOE CAP** AirToe Aluminum, maximum protection with streamlined shape
- **FOOTBED** In soft polyurethane dynamic compound
- **SOLE** Direct-attach construction dual density PU with **Infinergy®** midsole Slip, Oil & Abrasion Resistant
- **Static Dissapitive SD 35 Rated**
- **SIZE** 3.5-12,13,14 U-niversal Fit width
- **COLOR** black/slate

ASTM F2413-24
I/C SD 35 SRO



Airtoe
ALUMINIUM

Infinergy®

U-POWER
ORIGINAL

wingtex



Infinergy® midsole with over
55% ENERGY RETURN



SD 35



Aluminum Toe



SRO

SOFTNESS AND COMFORT

STABILITY AND RESILIENCE

ATHLETIC LOOK AND FIT

COMPOSITE TOE-CAP

55% ENERGY RETURN

OPTIMAL CUSHIONING

MULTIDIRECTIONAL TREAD AND TRACTION



I - Toe Impact Resistant



EH - EH Rated



SD - Static Dissipative



SRO - Slip Resistant

C - Toe Compression Resistant

High-Performance Cushioning with Infinergy® E-TPU

The dual-density PU sole, made using direct injection technology, is enhanced with **Infinergy® E-TPU foam**—a revolutionary material composed of thousands of tiny air-filled cells.

These microcells absorb shock and deliver over **55% energy return** with every step, ensuring maximum comfort and reduced fatigue throughout the day.



- Standing for long periods
- Move in good conscience
- Walking up and down stairs repeatedly
- Repetitive stress
- Long periods kneeling or squatting
- Walking long distances

Next-Generation PU Technopolymer Outsole

Engineered for maximum grip, stability, and versatility:



90° BLOCK PROFILE
Straight-edge lugs improve ground adhesion and grip performance.

MULTILEVEL STABILISING CHANNELS
Designed to enhance anti-slip properties and promote secure footing on uneven surfaces.

PREFORMED HEEL
Versatile design for added support, comfort, and multi-surface adaptability.

Slip, Oil & Abrasion Resistant

RED LION

METAL FREE

Non-metallic safety shoes with the same athletic look, comfort, and energy return of the Red Lion series—ideal for metal-free work zones.

best for:

**airports and security
sensitive environments**



**100% Metal-Free
Freedom That Moves
With You**

UL10154 **TEMPEST MF**

- **UPPER** Soft nubuck water resistant leather
- **LINING** 3D Mesh lining for superior breathability and moisture wicking
- **SAFETY TOE CAP** AirToe Composite Metal Free
- **FOOTBED** In soft polyurethane dynamic compound
- **SOLE** Direct-attach construction dual density PU with **Infinergy®** midsole Slip, Oil & Abrasion Resistant
- **Electrical Hazard Rated**
- **SIZE** from 3.5-12,13,14 U-niversal Fit width
- **COLOR** black/black

ASTM F2413-24
I/C EH SR

wingtex

METAL FREE 100%

PATENTED

Airtoe COMPOSITE

Infinergy

U-POWER ORIGINAL



Infinergy® midsole with over 55% ENERGY RETURN



EH Rated



Composite Toe



SRO

UL20154 **DASH MF**

- **UPPER** Soft nubuck water resistant leather
- **LINING** 3D Mesh lining for superior breathability and moisture wicking
- **SAFETY TOE CAP** AirToe Composite Metal Free
- **FOOTBED** In soft polyurethane dynamic compound
- **SOLE** Direct-attach construction dual density PU with **Infinergy®** midsole Slip, Oil & Abrasion Resistant
- **Electrical Hazard Rated**
- **SIZE** 3.5-12,13,14 U-niversal Fit width
- **COLOR** black/black

ASTM F2413-24
I/C EH SR

wingtex

METAL FREE 100%

PATENTED

Airtoe COMPOSITE

Infinergy

U-POWER ORIGINAL



Infinergy® midsole with over 55% ENERGY RETURN



EH Rated



Composite Toe



SRO

UL20136

MACH MF

- **UPPER** Soft suede upper with textile inserts
- **LINING** 3D Mesh lining for superior breathability and moisture wicking
- **SAFETY TOE CAP** AirToe Composite Metal Free
- **FOOTBED U-POWER original**
- **SOLE** Direct-attach construction dual density PU with **Infinergy®** midsole Slip, Oil & Abrasion Resistant
- **Static Dissapitive SD 35 Rated**
- **SIZE** 3.5-12,13,14 U-niversal Fit width
- **COLOR** charcoal/slate

ASTM F2413-24
I/C SD 35 SR

wingtex

METAL FREE 100%



Airtoe COMPOSITE

Infinergy®

U-POWER ORIGINAL



Infinergy® midsole with over
55% ENERGY RETURN



SD 35



Composite Toe



SRO

UL20186

DARK MF

- **UPPER** Soft suede upper with textile inserts
- **LINING** 3D Mesh lining for superior breathability and moisture wicking
- **SAFETY TOE CAP** AirToe Composite Metal Free
- **FOOTBED U-POWER original**
- **SOLE** Direct-attach construction dual density PU with **Infinergy®** midsole Slip, Oil & Abrasion Resistant
- **Static Dissapitive SD 35 Rated**
- **SIZE** 3.5-12,13,14 U-niversal Fit width
- **COLOR** black/slate

ASTM F2413-24
I/C SD 35 SR

wingtex

METAL FREE 100%



Airtoe COMPOSITE

Infinergy®

U-POWER ORIGINAL



Infinergy® midsole with over
55% ENERGY RETURN



SD 35



Composite Toe



SRO

UL20146

NEON MF

- **UPPER** Soft suede upper with textile inserts
- **LINING** 3D Mesh lining for superior breathability and moisture wicking
- **SAFETY TOE CAP** AirToe Composite Metal Free
- **FOOTBED U-POWER original**
- **SOLE** Direct-attach construction dual density PU with **Infinergy®** midsole Slip, Oil & Abrasion Resistant
- **Static Dissipative SD 35 Rated**
- **SIZE** 3.5-12,13,14 U-niversal Fit width
- **COLOR** charcoal/orange
- **Interchangeable black laces included**



ASTM F2413-24
I/C SD 35 SR



SD 35



Composite Toe



SRO

**Infinergy® midsole with over
55% ENERGY RETURN**

VELOCITY MF

UL20116

- **UPPER** Ultra-breathable AIRNET and soft suede upper
- **LINING** 3D Mesh lining for superior breathability and moisture wicking
- **SAFETY TOE CAP** AirToe Composite Metal Free
- **FOOTBED U-POWER original**
- **SOLE** Direct-attach construction dual density PU with **Infinergy®** midsole Slip, Oil & Abrasion Resistant
- **Static Dissipative SD 35 Rated**
- **SIZE** 3.5-12,13,14 U-niversal Fit width
- **COLOR** grey/yellow



ASTM F2413-24
I/C SD 35 SR



SD 35



Composite Toe



SRO

**Infinergy® midsole with over
55% ENERGY RETURN**

UL20266

ARROW MF

- **UPPER** Ultra-breathable AIRNET and soft suede upper
- **LINING** 3D Mesh lining for superior breathability and moisture wicking
- **SAFETY TOE CAP** AirToe Composite Metal Free
- **FOOTBED U-POWER original**
- **SOLE** Direct-attach construction dual density PU with **Infinergy®** midsole Slip, Oil & Abrasion Resistant
- **Static Dissipative SD 35 Rated**
- **SIZE** 3.5-12,13,14 U-niversal Fit width
- **COLOR** black/black

wingtex

METAL FREE 100%

PATENTED

Airtoe COMPOSITE

Infinergy®

U-POWER ORIGINAL

ASTM F2413-24
I/C SD 35 SR



SD 35



Composite Toe



SRO

**Infinergy® midsole with over
55% ENERGY RETURN**







**DURABILITY BLENDED
WITH COMFORT**

**STABILITY AND
RESILIENCE**

**LIGHTWEIGHT
HEAVY-DUTY DESIGN**

FIBERGLASS TOE-CAP

55% ENERGY RETURN

OPTIMAL CUSHIONING

**RUGGED OUTDOOR OUTSOLE
PATTERN**



PR - Sole Puncture Resistant



SRO - Slip Resistant



I - Toe Impact Resistant
C - Toe Compression Resistant



EH - EH Rated



SD - Static Dissipative



WP - Waterproof

RED FIT... CHOOSE YOUR FIT!

Whoever chooses U-POWER, rightly expects the best!
Each pair of Red Fit boots includes **three insoles of different thicknesses** – allowing you to select the ideal combination of support, comfort, and fit for your individual foot shape

0.12 in

0.20 in

0.28 in



Next-Generation PU Technopolymer Outsole

Engineered for maximum grip, stability, and versatility:



**DIFFERENTIAL HEIGHT
TREAD ZONES**
Variable-depth lugs
improve grip on
surfaces from smooth
floors to rough terrain.

**DYNAMIC SELF-
CLEANING CHANNELS**
Angled grooves quickly
eject liquids and debris
to prevent clogging and
slipping.

90-DEGREE HEEL
Raised heel improves
grip on ladders, slopes,
and during sudden
stops.

**MULTI-LEVEL
STABILIZING RIBS**
Integrated ribs boost
slip resistance,
flexibility, and stability
on uneven or slick
surfaces.

Slip, Oil & Abrasion Resistant

RED FIT

Heavy-duty outdoor work boots combining rugged protection with the same comfort and energy return found in our athletic ranges. Built for challenging terrain and tough conditions.

best for:

**Heavy duty outdoor trades
and construction**



**Higher features
Heavy-duty protection
Energized by comfort**

BULWARK HF

UL10204

- **UPPER** Pull-up full grain leather U-DRYTECH membrane
- **LINING** 3D Mesh lining for superior breathability and moisture wicking
- **SAFETY TOE CAP** FiberToe lightweight and metal free
- **PUNCTURE RESISTANCE** Save & Flex® PLUS Lightweight and flexible composite puncture resistant midsole
- **FOOTBED** 3-insole set in soft PU dynamic compound
- **SOLE** Direct-attach construction dual density PU with **Infinergy®** midsole Slip, Oil & Abrasion Resistant
- **Electrical Hazard Rated**
- **SIZE** 7-12, 13, 14 U-niversal Fit width
- **COLOR** black/black

ASTM F2413-24
I/C EH PR SRO



EH



FiberToe



SRO



PR



WP



Infinergy® midsole with over 55% ENERGY RETURN

METAL FREE 100%



Fibertoe

Infinergy®

U-POWER ORIGINAL

U DRYTECH

BARREL HF

UL10224

- **UPPER** Soft nubuck leather U-DRYTECH membrane
- **LINING** 3D Mesh lining for superior breathability and moisture wicking
- **SAFETY TOE CAP** FiberToe lightweight and metal free
- **PUNCTURE RESISTANCE** Save & Flex® PLUS Lightweight and flexible composite puncture resistant midsole
- **FOOTBED** 3-insole set in soft PU dynamic compound
- **SOLE** Direct-attach construction dual density PU with **Infinergy®** midsole Slip, Oil & Abrasion Resistant
- **Electrical Hazard Rated**
- **SIZE** 7-12, 13, 14 U-niversal Fit width
- **COLOR** tobacco/black

ASTM F2413-24
I/C EH PR SRO



EH



FiberToe



SRO



PR



WP



Infinergy® midsole with over 55% ENERGY RETURN

METAL FREE 100%



Fibertoe

Infinergy®

U-POWER ORIGINAL

U DRYTECH

FORTRESS HF

UL10214

- **UPPER** Pull-up full grain leather U-DRYTECH membrane
- **LINING** 3D Mesh lining for superior breathability and moisture wicking
- **SAFETY TOE CAP** FiberToe lightweight and metal free
- **PUNCTURE RESISTANCE** Save & Flex® PLUS Lightweight and flexible composite puncture resistant midsole
- **FOOTBED** 3-insole set in soft PU dynamic compound
- **SOLE** Direct-attach construction dual density PU with **Infinergy®** midsole Slip, Oil & Abrasion Resistant
- **Electrical Hazard Rated**
- **SIZE** 7-12, 13, 14 U-niversal Fit width
- **COLOR** chocolate

ASTM F2413-24
I/C EH PR SRO



EH



FiberToe



SRO



PR



WP



**Infinergy® midsole with over
55% ENERGY RETURN**

**METAL
FREE**



Fibertoe

Infinergy®

U-POWER
ORIGINAL

U DRYTECH



UL10244

TITAN HF

- **UPPER** High abrasion resistant Putek HD with waterproof
- **LINING** 3D Mesh lining for superior breathability and moisture wicking U-DRYTECH membrane.
- **BOA Lacing system**
- **SAFETY TOE CAP** FiberToe lightweight and metal free
- **PUNCTURE RESISTANCE** Save & Flex® PLUS Lightweight and flexible composite puncture resistant midsole
- **FOOTBED** 3-insole set in soft PU dynamic compound
- **SOLE** Direct-attach construction dual density PU with **Infinergy®** midsole Slip, Oil & Abrasion Resistant
- **Static Dissipative SD 35 Rated**
- **SIZE** 7-12, 13, 14 U-niversal Fit width
- **COLOR** black/black

ASTM F2413-24
I/C SD 35 PR SRO



PU Tek HD
HYPERTEX technology

METAL FREE
100%



Fibertoe

Infinergy®

U-POWER
ORIGINAL

U DRYTECH



Infinergy® midsole with over
55% ENERGY RETURN



SD 35



FiberToe



SRO



PR



WP

UL10254

ROANOKE HF

- **UPPER** Nubuck full grain leather with waterproof U-DRYTECH membrane
- **LINING** 3D Mesh lining for superior breathability and moisture wicking
- **BOA Lacing system**
- **SAFETY TOE CAP** FiberToe lightweight and metal free
- **PUNCTURE RESISTANCE** Save & Flex® PLUS Lightweight and flexible composite puncture resistant midsole
- **FOOTBED** 3-insole set in soft PU dynamic compound
- **SOLE** Direct-attach construction dual density PU with **Infinergy®** midsole Slip, Oil & Abrasion Resistant
- **Electrical Hazard Rated**
- **SIZE** 7-12, 13, 14 U-niversal Fit width
- **COLOR** charcoal

ASTM F2413-24
I/C EH PR SRO



METAL FREE
100%

Fibertoe

Infinergy®

U-POWER
ORIGINAL

U DRYTECH



Infinergy® midsole with over
55% ENERGY RETURN




EH



FiberToe



SRO



PR



WP



POS MATERIAL

To support the presentation of the U-POWER Safety Footwear range in retail environments and trade counters, we offer a selection of branded point-of-sale materials designed to increase product visibility and encourage sell-out.



U-POWER FLOOR MAT
CODE: MU00442
32" x 20"



SLAT WALL SHELVES
CODE: ES00100
length 12"



U-POWER FLOOR DISPLAY
CODE: ES00036
63" x 18" x 14"



Our POS offering is constantly evolving to meet the needs of our partners.

For more information or to discover the latest available solutions, please contact us directly.



ART NO. : OMBO
COLOR : BLUE ROYAL
QTY : 25 PCS
SIZE : 2XL
N.W. : 12.70 KGS
G.W. : 14.20 KGS
CIN. : 23
MEAS : 66 X 45 X 32.5 CM
MADE IN BANGLADESH


ART NO.
COLOR
QTY
SIZE
N.W.
G.W.
CIN.
MEAS
MADE IN BANGLADESH

OMBO
BLUE ROYAL
25 PCS
12.70 KGS
14.20 KGS
66X45X32.5CM
MADE IN BANGLADESH





Don't worry... be happy!

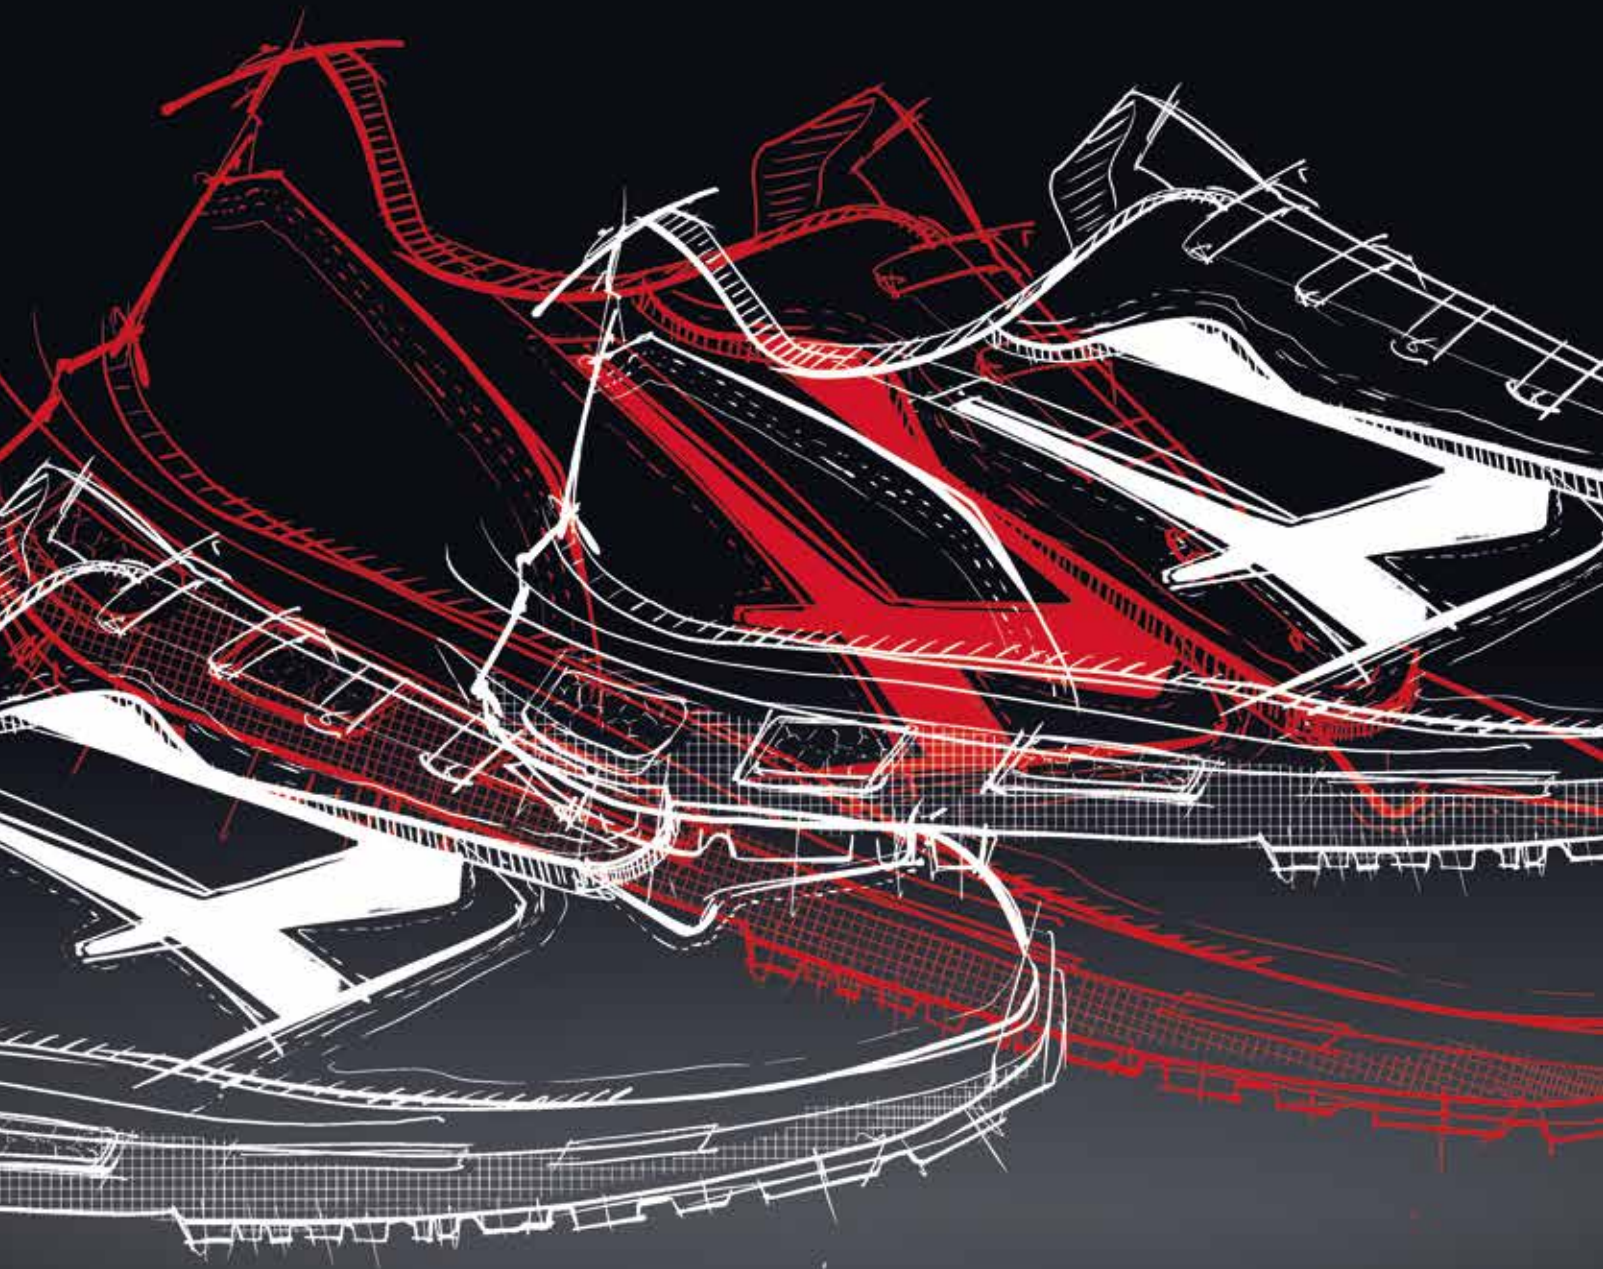

U-Power USA Inc
www.u-power.us.com
sales@u-power.us.com - info@u-power.us.com
+1 (855) 876-9599
8:00 am - 4:00 pm CST

