

LUMAWEDGE High Bay, High Temperature Model




FEATURES

- Maximum Temperature Rating up to +93°C/200°F
- Durable die-cast aluminum housing
- Black or White finishes
- Medium lighting distribution
- 0-10V Dimmable standard
- IP66 rated
- 5 Year Warranty

APPLICATIONS

- Papermills
- Foundries
- Steam Rooms
- Boiler Rooms
- Manufacturing Facilities
- Warehouses

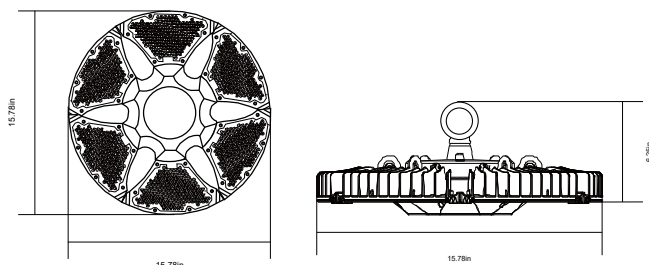

CONSTRUCTION

Durable die-cast aluminum housing with Polycarbonate optic plates. The unique modular design with thin body and finned heat sinks allows for rapid heat dissipation prolonging the life of the fixture.

WARRANTY

- Limited Five (5) Year Warranty standard

For more information regarding the limited five (5) year warranty please contact the factory at (844) 202-5606 or email Customer Service at LEDCustService@dascom.com.

ORDERING GUIDE

SERIES	WATTAGE	BEAM ANGLE	CRI	CCT	FINISH	VOLTAGE	TEMP RATING	OPTIONS
HB-6	090 90W 135 135W 180 180W 260 260W	W 80 DEGREE	8 ≥80	30 3000K 40 4000K 50 5000K	BLK BLACK WHT WHITE	U 100-277V	93 +93°C / +200°F 85 +85°C / +185°F	EY EYE LOOP MOUNT UB TRUNNION BRACKET

LED SPECIFICATION			3000K		4000K		5000K		WEIGHT (lbs.)	CERTIFICATION
MODEL	WATTS	TEMP	LUMENS	EFFICACY	LUMENS	EFFICACY	LUMENS	EFFICACY		
HB-6090	50	-25°C ~ +93°C / -13°C ~ +200°F	7,700	154 lm/W	7,850	157 lm/W	8,150	163 lm/W	5.29	DLC, ETL
	70	-25°C ~ +85°C / -13°C ~ +185°F	10,780	154 lm/W	10,990	157 lm/W	11,410	163 lm/W		
HB-6135	75	-25°C ~ +93°C / -13°C ~ +200°F	11,550	154 lm/W	11,775	157 lm/W	12,225	163 lm/W	6.61	
	105	-25°C ~ +85°C / -13°C ~ +185°F	16,170	154 lm/W	16,485	157 lm/W	17,115	163 lm/W		
HB-6180	100	-25°C ~ +93°C / -13°C ~ +200°F	15,400	154 lm/W	15,700	157 lm/W	16,400	164 lm/W	7.49	
	140	-25°C ~ +85°C / -13°C ~ +185°F	21,560	154 lm/W	21,980	157 lm/W	22,960	164 lm/W		
HB-6260	150	-25°C ~ +93°C / -13°C ~ +200°F	22,950	153 lm/W	23,400	156 lm/W	24,600	164 lm/W	9.92	
	210	-25°C ~ +85°C / -13°C ~ +185°F	32,130	153 lm/W	32,760	156 lm/W	34,440	164 lm/W		