

IO Module


Bringing your wired devices online

Do you want to connect your wired devices to a wireless network? The digital IO Module enables you to connect wired devices to a network, allowing your wired devices to communicate and receive information wirelessly.

- Key features are:
- Bridging wired devices and Zigbee networks
 - Four digital inputs with dry contact
 - Two relay outputs with NO and NC contacts
 - On/off or pulse functionality

Establishing reliable communication between wired devices and Zigbee networks


The digital IO Module integrates wired devices into wireless Zigbee networks. Providing four inputs and two outputs, the IO Module works as a bridge of reliable communication between wired devices and a control system over Zigbee networks. Devices connected to the input will trigger events, and devices connected to the output will respond to events.



- **Secure communication**
- **Saves cabling efforts**
- **Remote data collection and control of wired devices**

Numerous options for uses

The digital IO Module can be connected to a wide range of devices. An example could be to connect a heat pump to the network through the IO Module so you can control the heat pump and make it consume energy when other appliances in the building do not require electricity. Also, the module can be used to connect an access system to a network, so that automatic doors can be connected to and controlled through a gateway. The IO Module is interoperable with other Zigbee devices. For instance, you can use it to connect window blinds to a Motion Sensor, so the blinds close when the sensor detects bright light. The module has a convenient, compact size, as it is designed to fit in a small box, for instance, it fits behind an electricity outlet. The inputs can be configured as IAS alarm inputs, bridging wired alarm systems/sensors into the Zigbee network.

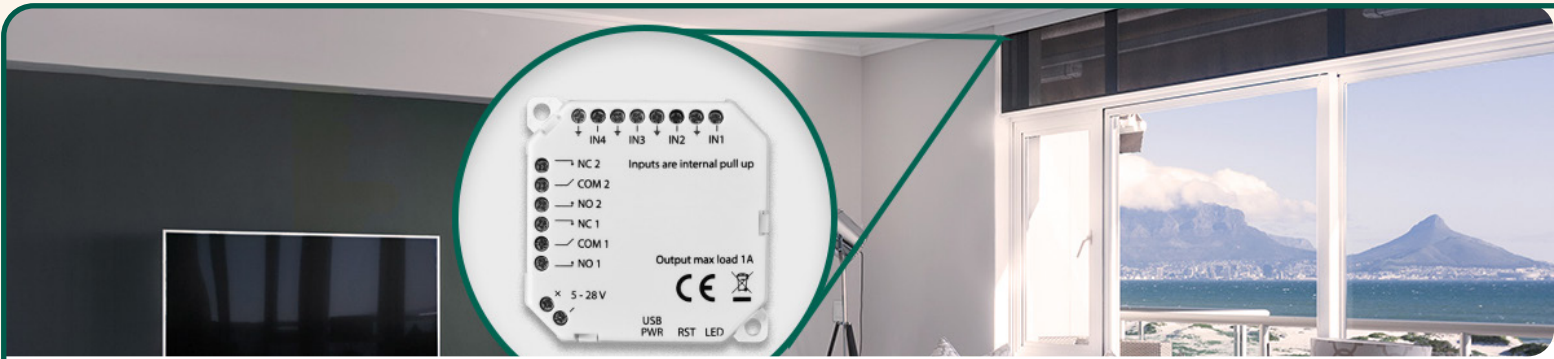

IO Module - Technical specifications

Model number: IOMZB-110

General

Dimensions (WxHxD) 45 x 45 x 16 mm / 1.77 x 1.77 x 0.63 inches
 Weight 24.8 g / 0.87 oz (with packaging: 41.5 g / 1.46 oz)

Color White

Power supply 5 – 28VDC (Alternative: uUSB – e.g. for power bank)

Power consumption 0.3 W

Radio Sensitivity: -100 dBm
 Output Power: 12 dBm

Environment IP Class: IP20
 Operation Temperature: 0 – 50 °C / 32 - 122 °F
 Relative humidity 5 – 95% (non-condensing)

Switch specifications Maximum relay switch cycles, 1E4: 10.000 switch cycles
 Switch type, μ : The module operates by micro disconnections (relay terminals connects/disconnects signal)

Functions

Output 2 pcs NO/NC - on/off or pulse
 Max switch voltage: 30V
 Max Switch Current: 1A

Input 4 pcs contact input (potential free switch or relay) NO/NC by SW
 Each input can be configured as an IAS alarm

Communication

Wireless protocol Zigbee 3.0
 Zigbee router