BIRONCRAFT



3-PT ATTACHMENTS PRODUCT GUIDE

ROTARY CUTTERS	2
Single Spindle Rotary Cutters	2
Dual/Multi Spindle Rotary Cutters	9
Flex-Wing Rotary Cutters	10
MOWERS	16
Flail Mowers	16
Finishing Mowers	19
LANDSCAPING	20
Box Blades	20
Dual Edge Graders	22
Grader Blades	24
Landscape Rakes	28
TILLAGE	30
Tillers	30
Harrows	36
Moldboard Plows	40
Aerators	41
MATERIAL HANDLING	44
Boom Poles	44
Bale Unroller	45
CONSTRUCTION & MISCELLANEOUS	46
Post Hole Diggers	46
Quick Hitches	4 7
Spreaders	48
Auxiliary Hydraulic Kit	49







These economically priced cutters are designed for light-duty applications such as weeds, grass, and light brush up to 1" diameter.











	135	
HORSEPOWER	10-45 HP	
WIDTH	42"	
WEIGHT	463 LBS	
CUTTING CAPACITY	1"	
DECK THICKNESS	12 GA	
SIDE BANDS	7"	
PTO DRIVE SHAFT	SERIES 4	
STUMP JUMPER	PAN	
GEARBOX	55 HP	
WHEEL	LAMINATED	
нив	GREASEABLE	
HITCH	CAT 1	
QH COMPATIBLE	YES	
GEARBOX WARRANTY	1 YR LIMITED	











STANDARD-DUTY CUTTERS

IronCraft's 1200 series rotary cutters are a great choice for tractors ranging in PTO horsepower from 15 to 65. These single spindle rotary cutters are available in widths of 48", 60", and 72". They are designed to cut grass, weeds, and light brush up to 1-1/2" in diameter and are available in five different color choices.


















	1204	1205	1206
PTO HORSEPOWER	15-45 HP	20-45 HP	30-65 HP
CUTTING CAPACITY		1-1/2"	
CUTTING HEIGHT		2" MIN.	
CUTTING WIDTH	48"	60"	72"
OVERALL WIDTH	51"	63 "	75"
APPROXIMATE WEIGHT	538 LBS	596 LBS	726 LBS
GEARBOX RATING (HP)		55 HP	
INPUT PTO		SERIES 4	
DRIVELINE PROTECTION	SHEAR	PIN OR SLIP C	LUTCH
HITCH		CAT 1	
QH COMPATIBLE		YES	
DECK THICKNESS	11 GA		
SIDE BANDS	7"		
SKID SHOES (STANDARD)	REPLACEABLE		
BLADES	1/2" X 3"		
GUARDING	OPTIONAL RUBBER BELTING OR CHAINS		G OR CHAINS
BLADE TIP SPEED	12,232 FPM	13,000 FPM	14,500 FPM
BLADE CARRIER	PAN		
NUMBER OF TAILWHEELS	1		
HUB	GREASEABLE		
WHEEL TYPE	LAMINATED		
GEARBOX WARRANTY	5 YEAR LIMITED		

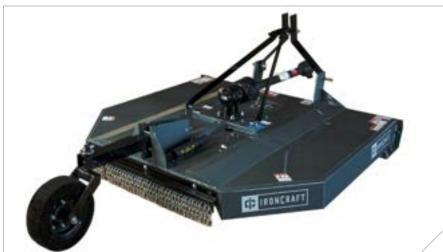





MEDIUM-DUTY SMOOTH-TOP CUTTERS

IronCraft's 300 series smooth-top rotary cutter is great for clearing grass and brush up to 2" in diameter. It is designed for tractors with 32 - 90 PTO Horsepower and comes standard with a slip clutch and your choice of 5 different colors.




















	305	306 1-TW	306 2-TW
PTO HORSEPOWER	32 - 90 HP	45 - 90 HP	47 - 90 HP
CUTTING CAPACITY	2"	2"	2"
CUTTING HEIGHT		2" MINIMUM	
CUTTING WIDTH	60"	72"	72"
APPROXIMATE WEIGHT	640 LBS	740 LBS	740 LBS
GEARBOX RATING (HP)		100 HP	
INPUT PTO		SERIES 4	
DRIVELINE PROTECTION		SLIP CLUTCH	
HITCH		CAT 1	
QH COMPATIBLE		YES	
DECK THICKNESS	10 GA		
SIDE BANDS	8-1/2"		
SKID SHOES (STANDARD)	REPLACEABLE		
BLADES	1/2" X 3"		
GUARDING	OPTIONAL RUBBER BELTING OR CHAINS		
BLADE TIP SPEED	13,000 FPM 14,500 FPM		0 FPM
BLADE CARRIER	1/2" PLATE		
NUMBER OF TAILWHEELS	1	1	2
HUB	GREASEABLE		
WHEEL TYPE	15" LAMINATED		
GEARBOX WARRANTY	5 YEAR LIMITED		



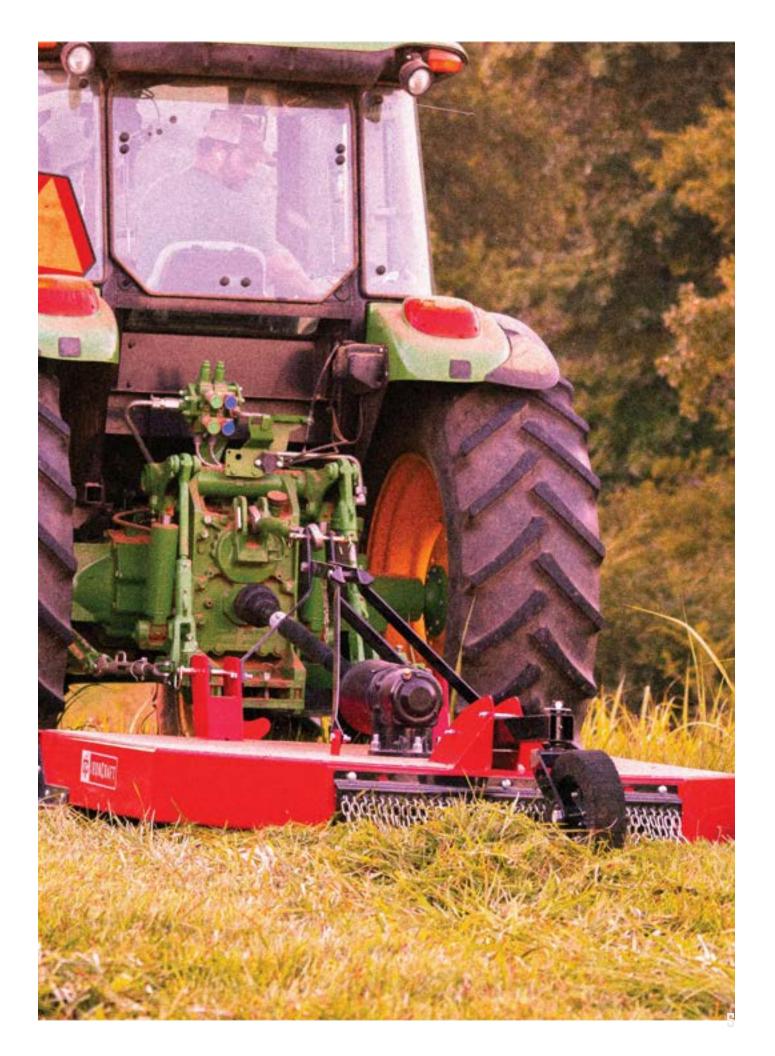



Ironcraft's heavy-duty 1500 series cutter is designed to cutter material up to 3" in diameter. It is offered in 3 working widths and five colors. It comes standard with a slip-clutch to protect the gearbox and driveline from damage. Rubber belting or chains are optional.


















	1505	1506	150 <i>7</i>
PTO HORSEPOWER	35 - 80 HP	40 - 80 HP	55 - 95 HP
CUTTING CAPACITY	2-1	./2"	3"
CUTTING HEIGHT		2" MINIMUM	
CUTTING WIDTH	60"	72"	84"
APPROXIMATE WEIGHT	745 LBS	900 LBS	1305 LBS
GEARBOX RATING (HP)	100 HP	100 HP	150 HP
INPUT PTO	SERI	IES 4	SERIES 6
DRIVELINE PROTECTION		SLIP CLUTCH	
HITCH	CA	T 1	CAT 2
QH COMPATIBLE	YI	ES	YES-CAT 2
DECK THICKNESS	10 GA		
SIDE BANDS	7"		
SKID SHOES (STANDARD)	REPLACEABLE		
BLADES	1/2" X 3" UPLIFT		
GUARDING	OPTIONAL RUBBER BELTING OR CHAINS		G OR CHAINS
BLADE TIP SPEED	14,500 FPM		
BLADE CARRIER	1/2" PLATE		
NUMBER OF TAILWHEELS	1		
HUB	GREAS	EABLE	BEARING
WHEEL TYPE	LAMINATED		
GEARBOX WARRANTY	5 YEAR LIMITED)











Available in cutting widths of 72" or 84", the 1600 series cutter is a heavy-duty single spindle cutter and cut grass and brush up to 3" in diameter. With a choice of different colors you can match your cutter to your tractor.



















	1606	1607
PTO HORSEPOWER	47 - 100 HP	55 - 100 HP
CUTTING CAPACITY	3	111
CUTTING HEIGHT	2" MIN	IIMUM
CUTTING WIDTH	72"	84"
APPROXIMATE WEIGHT	1205 LBS	1375 LBS
GEARBOX RATING (HP)	100	НР
INPUT PTO	SERI	IES 6
DRIVELINE PROTECTION	SLIP C	LUTCH
HITCH	CAT	1/2
QH COMPATIBLE	YES - CAT 2	
DECK THICKNESS	7 GA	
SIDE BANDS	8"	
SKID SHOES (STANDARD)	REPLACEABLE	
BLADES	1/2" X 4"	
GUARDING	OPTIONAL RUBBER BELTING OR CHAINS	
BLADE TIP SPEED	16,800 FPM	
BLADE CARRIER	1/2" PLATE	5/8" PLATE
NUMBER OF TAILWHEELS	:	2
HUB	BEA	RING
WHEEL TYPE	LAMINATED	
GEARBOX WARRANTY	5 YEAR LIMITED	





HEAVY-DUTY ROUNDBACK CUTTER

The robust 970 Roundback Rotary Cutter has an 84" cutting width. It works well with 60 horsepower and larger tractors. The 970 provides the cutting power to slash its way through heavy brush and small trees up to 4" diameter. The 970 is perfect for maintaining the farm or the roadside. The smooth top deck design prevents build-up of debris or other cuttings and makes cleanup fast and easy.



















	970	
PTO HORSEPOWER	60 HP MINIMUM	
CUTTING CAPACITY	4"	
CUTTING HEIGHT	1" MINIMUM	
CUTTING WIDTH	84"	
OVERALL WIDTH	90"	
APPROXIMATE WEIGHT	1450 LBS	
CENTER GEARBOX RATING	175 HP	
INPUT PTO	SERIES 6	
DRIVELINE PROTECTION	SLIP CLUTCH	
HITCH	CAT 2	
QUICK HITCH COMPATIBLE	YES	
DECK THICKNESS	7 GA	
SIDE BANDS	1/4" X 12"	
SKID SHOES (STANDARD)	1/4" W/ REPLACEABLE LIP	
BLADES	1/2" X 4"	
GUARDING	CHAINS STANDARD	
BLADE TIP SPEED	16,500 FPM	
BLADE CARRIER	3/16" FORMED PLATE	
NUMBER OF TAILWHEELS	2	
HUB	BEARING	
WHEEL TYPE	LAMINATED	
GEARBOX WARRANTY	5 YEAR LIMITED	





HEAVY-DUTY MULTI-SPINDLE CUTTERS

The 1800 series is IronCraft's heavyduty dual spindle cutters. They are designed to work with tractors ranging in pto horsepower from 42 to 125 and cut material up to 3" in diameter. They are available with lift and pull type hitches as well as five different color choices.



















	1808	1810
PTO HORSEPOWER	42 HP MIN	52 HP MIN
CUTTING CAPACITY	3	an and an
CUTTING HEIGHT	2" TO	0 10"
CUTTING WIDTH	96"	120"
OVERALL WIDTH	98"	122"
APPROXIMATE WEIGHT	1250 LBS	1480 LBS
CENTER GEARBOX RATING	125 HP	
OUTBOARD GEARBOX Rating	100 HP	
INPUT PTO	SERIES 5	
DRIVELINE PROTECTION	SLIP CLUTCH	
CENTER DRIVESHAFT	SHOCK COUPLER PROTECTED	
HITCH	CAT 1 & 2	

	1808	1810
DECK THICKNESS	10 GA	7 GA
SIDE BANDS	8	ju
SKID SHOES (STANDARD)	REPLAC	CEABLE
BLADES	1/2" X 3" UPLIFT	
GUARDING	OPTIONAL CHAINS	
BLADE TIP SPEED	17,100 FPM	15,235 FPM
BLADE CARRIER	1/2" PLATE	
NUMBER OF TAILWHEELS	2	
HUB	BEARING	
WHEEL TYPE	LAMINATED	
GEARBOX WARRANTY	5 YEAR LIMITED	



If you are looking for a Flex-Wing Rotary Cutter for your compact tractor, the IronCraft 2512 is the choice for you. With its smooth top deck and spring suspension, this flex-wing is designed to cut grass, weeds, and light brush up to 2" in material while only requiring a minimum PTO horsepower of 35 and one hydraulic outlet. With five different color choices you are able to match your cutter to your tractor.











	2512	
PTO HORSEPOWER	"35 PTO HP MINIMUM (GEAR DRIVE TRANSMISSION)"	
CUTTING WIDTH	144"	
OVERALL WIDTH	151"	
OVERALL LENGTH W/ WHEEL	158"	
TRANSPORT WIDTH	89-3/4"	
TRANSPORT HEIGHT	68"	
CUTTING CAPACITY	UP TO 2"	
CUTTING HEIGHT	1-1/2" TO 12"	
APPROXIMATE WEIGHT	2,630 LBS W/4-20" LAMINATED TIRES	
APPROXIMATE TONGUE WEIGHT	759 LBS	
BLADE TIP SPEED	15,657 FPM	
BLADES	1/2" X 3" W/ LIFT	
OUTBOARD GEARBOXES	75 HP	
SPLITTER GEARBOX	175 HP	
GEARBOX RPM	540 RPM	
GEARBOX OIL	85W-140 (FACTORY FILLED)	
OUTPUT SHAFT DIAMETER	2"	
INPUT PTO	ASAE CAT 5 CV	
WING DRIVE PTO	ASAE CAT 4 W/ SLIP CLUTCH	

HITCH	SWIVEL CLEVIS	
DECK THICKNESS	10 GA	
SIDE SKIRT MATERIAL	3/16"	
HEIGHT ADJUSTMENT	HYD. CYLINDER	
WING ADJUSTMENTS	TURNBUCKLE	
SUSPENSION	SINGLE SPRING	
WING FLEX	22 DEGREES DOWN TO 87 DEGREES UP	
WING FREE FLOAT	22 DEGREES DOWN TO 45 DEGREES UP	
WING CYLINDERS	SINGLE ACTING STD	
SKID SHOES (STANDARD)	STD & REPLACEABLE	
SAFETY DEFLECTORS	SINGLE ROW STANDARD	
TOW CHAINS	STANDARD	
BLADE OVERLAP	6"	
BLADE CARRIER	3/16" FORMED PLATE W/ 1" X 6" BAR	
WHEELS & TIRES	4-20" laminated Std (4-20" aircraft optional)	
DECK RINGS	N/A	
LIGHT KIT	N/A	
GEARBOX WARRANTY	5 YEAR LIMITED	











IronCraft's 2515 will make quick work of tough jobs. This 15' Flex-Wing Rotary Cutter is designed for tractors with a minimum PTO horsepower of 50. It only requires one hydraulic remote and can cut material up to 2-1/2" in diameter. Match your cutter to your tractor with five different color choices.












	2515	
PTO HORSEPOWER	50 PTO HP MINIMUM	
CUTTING WIDTH	180"	
OVERALL WIDTH	188"	
OVERALL LENGTH W/ WHEEL	186"	
TRANSPORT WIDTH	90"	
TRANSPORT HEIGHT	83" - 87"	
CUTTING CAPACITY	UP TO 2-1/2"	
CUTTING HEIGHT	2" TO 15"	
APPROXIMATE WEIGHT	4500 LBS W/6-26" LAMINATED TIRES	
APPROXIMATE TONGUE WEIGHT	1500 LBS	
BLADE TIP SPEED	17,135 FPM (540 OR 1000 RPM)	
BLADES	1/2" X 4" UPLIFT	
OUTBOARD GEARBOXES	190 HP	
SPLITTER GEARBOX	235 HP	
GEARBOX RPM	540 OR 1000 RPM	
GEARBOX OIL	85W-140 (FACTORY FILLED)	
OUTPUT SHAFT DIAMETER	2"	
INPUT PTO	ASAE CAT 6 CV	
WING DRIVE PTO	ASAE CAT 4 W/ SLIP CLUTCH	

HITCH	SWIVEL PIVOT SELF LEVELING	
DECK THICKNESS	10 GA	
SIDE SKIRT MATERIAL	1/4" X 13-1/2"	
HEIGHT ADJUSTMENT	HYD. CYLINDER	
WING ADJUSTMENTS	HEAVY DUTY TURNBUCKLE	
SUSPENSION	1 HEAVY DUTY SPRING	
WING FLEX	22 DEGREES DOWN TO 88 DEGREES UP	
WING FREE FLOAT	22 DEGREES DOWN TO 45 DEGREES UP	
WING CYLINDERS	SINGLE ACTING STD	
SKID SHOES (STANDARD)	REPLACEABLE	
SAFETY DEFLECTORS	SINGLE ROW STANDARD	
TOW CHAINS	STANDARD	
BLADE OVERLAP	6"	
BLADE CARRIER	ROUND PAN	
WHEELS & TIRES	4-20" laminated std (optional 4 or 6 tires in 26" laminated, 29" aircraft or 26" foam filled)	
DECK RINGS	N/A	
LED LIGHT KIT	OPTIONAL	
GEARBOX WARRANTY	Y 5 YEAR LIMITED	

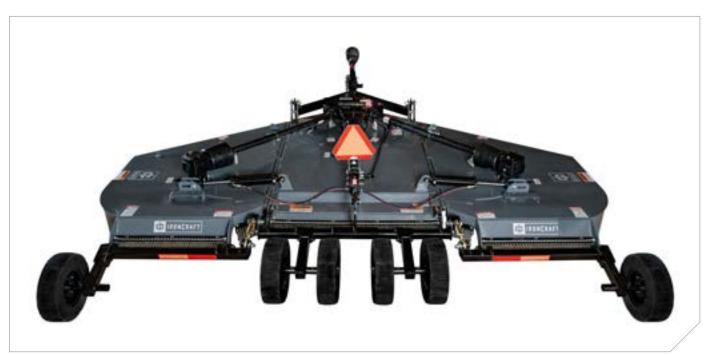









The 3515 is IronCraft's Heavy-Duty 15' Flex-Wing Rotary Cutter. It has a heavy 7 Gauge press formed blade pan that is strategically designed for greater rotational balance, better cut quality, and greater gearbox longevity and a reinforced deck. The 3515 can cut material up to 3-1/2" with a minimum PTO horsepower requirement of 60 and is available in five different color choices.

9010











	3515	
PTO HORSEPOWER	60 PTO HP MINIMUM	
CUTTING WIDTH	180"	
OVERALL WIDTH	188"	
OVERALL LENGTH W/ WHEEL	200"	
TRANSPORT WIDTH	90"	
TRANSPORT HEIGHT	83" - 87"	
CUTTING CAPACITY	UP TO 3-1/2"	
CUTTING HEIGHT	2" TO 15"	
APPROXIMATE WEIGHT	5600 LBS W/ 6-26" LAMINATED TIRES	
APPROXIMATE TONGUE WEIGHT	1900 LBS	
BLADE TIP SPEED	17,135 FPM (540 OR 1000 RPM)	
BLADES	1/2" X 4" UPLIFT	
OUTBOARD GEARBOXES	190 HP	
SPLITTER GEARBOX	235 HP	
GEARBOX RPM	540 OR 1000	
GEARBOX OIL	85W-140 (FACTORY FILLED)	
OUTPUT SHAFT DIAMETER	2"	
INPUT PTO	ASAE CAT 6 CV	
WING DRIVE PTO	ASAE CAT 4 W/ SLIP CLUTCH	

HITCH	SWIVEL PIVOT SELF LEVELING	
DECK THICKNESS	10 GA	
SIDE SKIRT MATERIAL	1/4" X 13-1/2"	
HEIGHT ADJUSTMENT	HYD. CYLINDER	
WING ADJUSTMENTS	HEAVY DUTY TURNBUCKLE	
SUSPENSION	2 HEAVY DUTY SPRINGS POSITIONED ON THE CENTER TAIL WHEEL AXLE	
WING FLEX	22 DEGREES DOWN TO 100 DEGREES UP	
WING FREE FLOAT	22 DEGREES DOWN TO 45 DEGREES UP	
WING CYLINDERS	DUAL ACTING STD	
SKID SHOES (STANDARD)	REPLACEABLE	
SAFETY DEFLECTORS	SINGLE ROW STANDARD	
TOW CHAINS	STANDARD	
BLADE OVERLAP	6"	
BLADE CARRIER	ROUND PAN	
WHEELS & TIRES	4-20" laminated std (optional 4, 6 or 8 tires in 26" laminated, 29" aircraft or 26" foam filled)	
DECK RINGS	STANDARD	
LED LIGHT KIT	OPTIONAL	
GEARBOX WARRANTY	5 YEAR LIMITED	











The FL series flail mower is compact and light, making it the perfect choice for sub-compact or compact tractors ranging in PTO horsepower from 23 to 40. This is a great attachment for weekend farmers and gardening. It is available with hammers and blades.



	FL-135	FL-165	
PTO HORSEPOWER	23 - 35 HP	25 - 40 HP	
CUTTING WIDTH	52"	64"	
OVERALL WIDTH	57"	69"	
HITCH	CA	Τ1	
WEIGHT	386 LBS	518 LBS	
NUMBER OF HAMMERS	24		
NUMBER OF BLADES	48		
ROLLER THICKNESS	10 GAUGE		
ROTOR THICKNESS	5/16"		
FRAME THICKNESS	9 GAUGE		
BELTS	3		
WARRANTY	1 YEAR 1 YEAR		











FMH SERIES







The FMH series has a wide working width up to 86" reach and can mow up to 1-1/2" diameter material with the use of flails or hammers. It comes standard with hammers, hydraulic side shift, rear roller, and rakes. Knives are additional.









	FMH-160H	FMH-175H	FMH-205H	FMH-220H
PTO HORSEPOWER	35 - 70 HP	40 - 70 HP	45 - 70 HP	50 - 70 HP
MOWING WIDTH	63"	69"	80.7"	86-1/2"
OVERALL WIDTH	69"	75-1/2"	84.4"	93"
HITCH		CAT 1,	, 3-PT	
WEIGHT	908 LBS	957 LBS	1,063 LBS	1,1116 LBS
HYDRAULIC OFFSET		12"		
NUMBER OF HAMMERS	20	22	26	28
BELTS	4			
WARRANTY	1 YEAR			



Designed for tractors ranging in horsepower from 50 to 100, the BPF series can cut up to 3" material. It has a open deck design for easy maintenance. It comes standard with hydraulic side shift and a rear roller.



	BPF-225	BPF-250	
PTO HORSEPOWER	50 - 10	00 HP	
WORKING WIDTH	87"	98"	
OVERALL WIDTH	96"	106"	
HITCH	CAT 2	, 3-PT	
WEIGHT (W/OUT PTO)	1,726 LBS	1,907 LBS	
NUMBER OF HAMMERS	20	24	
NUMBER OF BLADES	60	72	
BELTS	4	5	
ROLLER DIAMETER	6.69"		
ROTOR DIAMER	6.69"		
WARRANTY	1 YEAR		











SGM SERIES



FINISHING MOWERS



IronCraft's SGM series finishing mowers provide a superior cutting quality for turf surfaces and well-maintained lawns. They work well for the needs of golf courses, large estate owners, municipalities, ranchers, or commercial mowing and landscape operations.











	SGM-4	SGM-S	SGM-6	SGM-7
PTO HORSEPOWER	14 - 23 HP	23 -32 HP	32 - 40 HP	35 - 65 HP
CUTTING WIDTH	48"	60"	72"	84"
HITCH		CAT	Γ1	
QH COMPATIBLE		YE	S	
WEIGHT	420 LBS	440 LBS	500 LBS	600 LBS
NUMBER OF BLADES	3			
NUMBER OF BELTS	2			
WARRANTY	1 YEAR			



Offset flail mowers go further to tackle areas where a brush mower can't without backing up.





	FRF125	FRF145	FRF165
TRACTOR HP	20-40 HP	30-45 HP	40-50 HP
WEIGHT	630 lb	672 lb	703 lb
HITCH	CAT 1	CAT 1	CAT 1
CUTTING WIDTH	47 in	55 in	63 in
# OF HAMMER Blades	20	24	28
HAMMER Dimensions	3.4 in x 1.7 in		
SIDE Transmission	3 BELTS	3 BELTS	4 BELTS
ROTOR DIAMETER	4.2 in		
ROLLER DIAMETER	4.7 in		
PTO SHAFT SERIES	4		





BRF SERIES HEAVY DUTY OFFSET FLAIL MOWER






The multi-purpose capability of IronCraft's BRF series makes it ready to face anything! Even on uneven terrain, it shreds grass, weeds, and brushwood up to 2" in diameter. Robust, yet easy to handle in tight areas, IronCrafts new BRF line is ideal for ripping, leveling, finish grading, and backfilling applications.



	BRF160	BRF180	BRF200
TRACTOR HP	70-100 HP	70-100 HP	70-100 HP
WEIGHT	1433 lb	1565 lb	1719 lb
HITCH	CAT 2	CAT 2	CAT 2
CUTTING WIDTH	63 in	71 in	79 in
# OF HAMMER Blades	14	16	16
HAMMER Dimensions	4.9 in x 1.7 in		
SIDE Transmission	4 BELTS		
ROTOR DIAMETER	6.3 in		
ROLLER DIAMETER	7.6 in		
PTO SHAFT SERIES	6		

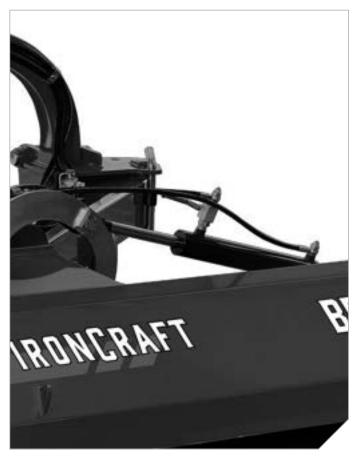



STANDARD-DUTY BOX BLADES

IronCraft's 3100 series box blades are ideal for use on the farm, at building sites, or outdoor arenas. They are designed to work topsoil, gravel, mulch, or manure. They feature adjustable shanks and are available in five different widths and color choices.



















	3104	3105	3106	3107	3108
HORSEPOWER REQUIRED			15-45 HP		
WORKING WIDTH	48"	60"	72"	84"	96"
MOLDBOARD HEIGHT			17"		
OVERALL DEPTH			22"		
WEIGHT	290 LBS	323 LBS	357 LBS	390 LBS	421 LBS
NUMBER OF SHANKS	3	4	5	6	6
A-FRAME MATERIAL	3/8"				
CUTTING EDGES	6"				
QUICK HITCH COMPATIBLE	YES				
HITCH	CAT 1				
WARRANTY	1 YEAR				







For tough jobs, the 3200 heavy-duty box scrapers will help maintain your farm, building site, or landscaping. They make quick work of ripping up dirt, grading and leveling land, or spreading soil. They are available in 3 different working widths and choice of 5 different colors.

















	3206	3207	3208
HORSEPOWER REQUIRED		30 - 70 HP	
WORKING WIDTH	72"	84"	96"
MOLDBOARD HEIGHT		17"	
OVERALL DEPTH		22"	
WEIGHT	530 LBS	586 LBS	640 LBS
NUMBER OF SHANKS	5	6	6
A-FRAME MATERIAL	1/2"		
CUTTING EDGES	6"		
QUICK HITCH COMPATIBLE	YES		
HITCH	CAT 1 & 2		
WARRANTY	1 YEAR		



STANDARD-DUTY DUAL EDGE GRADERS

IronCraft's 3600 dual-edge graders can be used to maintain gravel driveways, level a garden plot, and smooth dirt areas including horse arenas and barn floors. They feature replaceable skid shoes, reversible blades, adjustable blade height and shanks.













	3605	3606	
HORSEPOWER REQUIRED	25 -55 HP	35 - 55 HP	
WORKING WIDTH	60"	72"	
OVERALL WIDTH	65-5/8''	77-5/8"	
OVERALL LENGTH	52-	7/8"	
OVERALL HEIGHT	33-	3/4"	
WEIGHT W/ SHANKS	490 LBS	545 LBS	
NUMBER OF SHANKS	4	5	
A-FRAME MATERIAL	3/8"		
SIDE PANEL THICKNESS	3/1	16"	
SIDE PANEL HEIGHT	15-1	1/16"	
SIDE PANEL LENGTH	46-3/8"		
LOWER DRAFT LINK Attach	CLEVIS TYPE		
HITCH	CAT 1		
QH COMPATIBLE	YES		

	3605	3606
SCARIFIER SUPPORT TUBE	4" X 4" X 1/4"	
REAR BEAM Construction	3" X 3" X 3/16"	
SKID SHOES (STANDARD)	REPLAC	CEABLE
SKID SHOE DIMENSION	3/16" X 2-3/4" X 47-3/8"	
SHANK CONSTRUCTION	3 POSITION, HEAT TREATED W/ DIMPLED ON HARDENED TIPS	
SHANK ADJUSTMENT	1-1/2" AT GRADE LEVEL & 3" BELOW GRADE LEVEL	
CUTTING EDGE	REVERSIBLE 3/8" X 6"	
CUTTING EDGE Placement	TWO GRADING BLADES W/ 18-1/4" SPACING POSITIONED PARALLEL ON A 10 DEGREE GRADING ANGLE	
CUTTING EDGE ADJUSTMENT	VERTICAL ADJUSTMENT FROM LEVEL GRADE TO 1" BELOW GRADE	
WARRANTY	1 YEAR	



HEAVY-DUTY DUAL EDGE GRADERS

The 3700 series dual edge graders are designed for tractors ranging in horsepower from 40 - 80 and are quick hitch compatible. Featuring replaceable skid shoes, reversible blades, adjustable blade height and shanks, they can be used to maintain gravel driveways, smooth areas of dirt, and level garden plots.











	3707	3708
HORSEPOWER REQUIRED	40 - 80 HP	50 - 80 HP
WORKING WIDTH	84"	96"
OVERALL WIDTH	89-5/8"	101-5/8"
OVERALL LENGTH	58-1/2"	
OVERALL HEIGHT	33-3/4"	
WEIGHT W/ SHANKS	700 LBS	740 LBS
NUMBER OF SHANKS	6	6
A-FRAME MATERIAL	3/8"	
SIDE PANEL THICKNESS	3/16"	
SIDE PANEL HEIGHT	15-11/16"	
SIDE PANEL LENGTH	52-3/8"	
LOWER DRAFT LINK ATTACH	CLEVIS TYPE	
HITCH	CAT 1 & 2	
QH COMPATIBLE	YES	

	3707	3708
SCARIFIER SUPPORT TUBE	4" X 4" X 1/4"	
REAR BEAM CONSTRUCTION	3" X 3" X 3/16"	
SKID SHOES (STANDARD)	REPLAC	CEABLE
SKID SHOE DIMENSION	3/16" X 2-3/4" X 47-3/8"	
SHANK CONSTRUCTION	3 POSITION, HEAT TREATED W/ DIMPLED ON HARDENED TIPS	
SHANK ADJUSTMENT	1-1/2" AT GRADE LEVEL & 3" BELOW GRADE LEVEL	
CUTTING EDGE	REVERSIBLE 3/8" X 6"	
CUTTING EDGE PLACEMENT	TWO GRADING BLADES W/ 19-7/8"" SPACING POSITIONED PARALLEL ON A 10 DEGREE GRADING ANGLE	
CUTTING EDGE ADJUSTMENT	VERTICAL ADJUSTMENT FROM LEVEL GRADE TO 1" BELOW GRADE	
WARRANTY	1 YEAR	



The 4100 Series economy grader blade is for your smaller horsepower tractors ranging in horsepower from 15 - 35. They will handle your basic land grading, small construction, or maintenance jobs with ease.













	4104	4105	4106	4107
HORSEPOWER REQUIRED	15 - 35 HP			
WORKING WIDTH	48"	60"	72"	84"
MOLDBOARD HEIGHT	1:	13"		14"
WEIGHT	158 LBS	179 LBS	202 LBS	223 LBS
ANGLE ADJUSTMENT	5 POSITION FORWARD & REVERSE			
A-FRAME MATERIAL	3/8"			
CUTTING EDGES	6"			
HITCH	CAT 1			
QH COMPATIBLE	NO			
WARRANTY	1 YEAR			



STANDARD-DUTY GRADER BLADES



IronCraft's 4300 series standard duty box blade are ideal for basic land grading, leveling, or backfilling. They are available in 4 different working widths and feature five position angle adjustment as well as three-position tilt adjustment.









	4304	4305	4306	430 <i>7</i>
HORSEPOWER REQUIRED		15 - 4	5 HP	
WORKING WIDTH	48"	60"	72"	84"
MOLDBOARD HEIGHT	1	3"	14	1"
WEIGHT	178 LBS	199 LBS	252 LBS	276 LBS
ANGLE ADJUSTMENT	5 POSITION FORWARD & REVERSE			
TILT ADJUSTMENT	3 POSITION			
A-FRAME MATERIAL	3/8"			
CUTTING EDGES	6"			
HITCH	CAT 1			
QH COMPATIBLE	NO			
WARRANTY	1 YEAR			



These Offset Grader Blades offer ease of moving topsoil, gravel, snow, and other similar materials. They are built to give you years of reliable performance, and are designed to work with 35 to 65 hp tractors.













	4405	4406	4407
HORSEPOWER REQUIRED		35 - 65 HP	
WORKING WIDTH	60"	72"	84"
MOLDBOARD HEIGHT		15-1/2"	
WEIGHT	323 LBS	340 LBS	358 LBS
ANGLE ADJUSTMENT	5 POSITION FORWARD & REVERSE		
TILT ADJUSTMENT	3 POSITION		
A-FRAME MATERIAL	3/8"		
CUTTING EDGES	6"		
HITCH	CAT 1		
QH COMPATIBLE	YES		
WARRANTY	1 YEAR		

RONCRAFT

HEAVY-DUTY GRADER BLADES



These Heavy-Duty Grader Blades are IronCraft's toughest grader blades. These models will easily meet all of your land grading, leveling, or backfilling needs. Designed for 50 to 75 hp tractors, they feature a five-position angle adjustment, three-position tilt adjustment, utilize a ratchet jack for the offset adjustment, and are Category I & II quick hitch compatible. Three models provide working widths from 72" to 96".









	4506	4507	4508
HORSEPOWER REQUIRED	45 - 75 HP	50 - 75 HP	55 - 75 HP
WORKING WIDTH	72"	84"	96"
MOLDBOARD HEIGHT		17"	
WEIGHT	439 LBS	469 LBS	503 LBS
ANGLE ADJUSTMENT	5 POSITION FORWARD & REVERSE		
TILT ADJUSTMENT	3 POSITION		
OFFSET ADJUSTMENT	RATCHET JACK		
A-FRAME MATERIAL	3/8"		
CUTTING EDGES	6"		
HITCH	CAT 1 & 2		
QH COMPATIBLE	YES		
WARRANTY	1 YEAR		



IronCraft's Standard-Duty Landscape Rakes work well for cleaning and preparing sites for seeding. They can spread rocks, move debris, and reshape soil. Designed for use by landscapers and contractors, they will meet the demands required for golf course maintenance, terracing hillsides, shaping run-off control ditches, and preparing areas for reforestation.











	5104	5105	5106	5107	5108
HORSEPOWER REQUIRED	15 - 45 HP	20 - 45 HP	25 - 45 HP	30 - 45 HP	35 - 45 HP
WORKING WIDTH	48"	60"	72"	84"	96"
TINES PER FOOT			6		
WEIGHT	158 LBS	180 LBS	229 LBS	251 LBS	285 LBS
ANGLE ADJUSTMENT	5 POSITION FORWARD & REVERSE				
A-FRAME MATERIAL	3/8"				
MAINFRAME	4" X 4" ANGLE				
HITCH	CAT 1				
QH COMPATIBLE	NO				
WARRANTY	1 YEAR				

PROVEN ATTACHMEN Forging Ahead Forging Ahead Fried & Forging Ahead & Fried & MANUFACTURED & MANUFACTURED



The FMA125 is a chain drive tiller recommended for tractors ranging in horsepower from 13 to 25. It is designed for gardening and horticulture uses.



	FMA-125	
HORSEPOWER	13 - 25 HP	
TILLING WIDTH	49"	
OVERALL WIDTH	53"	
MAX WORKING DEPTH	4-3/4"	
HITCH	CAT 1 , 3-PT	
# OF FLANGES ON ROTOR	6	
# OF TINES PER FLANGE	4	
# OF TINES	24	
WEIGHT (WITHOUT PTO)	309 LBS	
PTO INPUT SPEED	540 RPM	
ROTOR TUBE DIAMETER	2"	
ROTOR SWING DIAMETER	12-1/2"	
WARRANTY	1 YEAR	









UL SERIES LIGHT-DUTY GEAR DRIVE TILLERS



The UL Rotary Tiller is suitable for tractors from 20 to 40 horsepower with a category 1 hitch. The UL models are lightduty and dependable, appropriate for gardening and horticulture.



	UL-48	UL-60	
HORSEPOWER	20 - 25 HP	25 - 40 HP	
TILLING WIDTH	48"	60"	
OVERALL WIDTH	53"	65"	
MAX WORKING DEPTH	7	rii	
HITCH	CAT 1, 3-PT		
# OF FLANGES ON ROTOR	6 7		
# OF TINES PER FLANGE	6		
# OF TINES	36	42	
WEIGHT (WITHOUT PTO)	397 LBS	441 LBS	
PTO INPUT SPEED	540 RPM		
ROTOR TUBE DIAMETER	3"		
ROTOR SWING DIAMETER	15"		
WARRANTY	1 YEAR	1 YEAR	









IronCraft's UM Rotary Tiller is medium-duty and dependable, able to work demanding soils like vineyards or orchards. The UM series is suitable for tractors from 25 to 50 horsepower with a category 1 hitch.



	UM-56	UM-72	
HORSEPOWER	25 - 50 HP		
TILLING WIDTH	60"	73"	
OVERALL WIDTH	65"	78"	
MAX WORKING DEPTH	7	111	
HITCH	CAT 1, 3-PT		
# OF FLANGES ON ROTOR	7	9	
# OF TINES PER FLANGE	6		
# OF TINES	42 54		
WEIGHT (WITHOUT PTO)	578 LBS 684 LBS		
PTO INPUT SPEED	540 RPM		
ROTOR TUBE DIAMETER	3"		
ROTOR SWING DIAMETER	17"		
WARRANTY	1 YEAR		









UH SERIES HEAVY-DUTY ROTARY TILLERS



The UH series is suitable for tractors from 50 to 65 hp with a Category 2 hitch. The UH models are heavy-duty and dependable, cutting through very demanding and stony soils.



	UH-60-R	UH-72-R	UH-84
PTO HORSEPOWER	40 - 55 HP	45 - 60 HP	50 - 65 HP
ROTATION	REV	ERSE	FORWARD
TILLING WIDTH	65	72	85"
MAX WORKING DEPTH	7-1	/2"	8"
HITCH	CAT 1 & 2, 3-PT		
# OF FLANGES ON ROTOR	7	8	9
# OF TINES PER FLANGE	6		
# OF TINES	42	48	54
WEIGHT (WITHOUT PTO)	860	926	993 LBS
PTO INPUT SPEED	540 RPM		
ROTOR TUBE DIAMETER	3-1/2"		4"
ROTOR SWING DIAMETER	19"		
WARRANTY	1 YEAR		













The VH series is a suitable for tractors from 75 to 125 horsepower with category 2 or 3 hitch. The VH models are heavyduty and dependable, cutting through very demanding and stony soils. The speed of the rotor can be adjusted.



	VH-90
HORSEPOWER	75 - 125 HP
TILLING WIDTH	90"
OVERALL WIDTH	95"
MAX WORKING DEPTH	9"
HITCH	CAT 2 OR 3, 3-PT
# OF FLANGES ON ROTOR	9
# OF TINES PER FLANGE	6
# OF TINES	54
WEIGHT (WITHOUT PTO)	1,557 LBS
PTO INPUT SPEED	540 RPM
ROTOR TUBE DIAMETER	3-1/2"
ROTOR SWING DIAMETER	17"
WARRANTY	1 YEAR













中 7100 SERIES

ANGLE FRAME DISC HARROW

IronCraft's angle frame disc harrows feature notched discs designed to open and break up the soil surface for prepping seedbeds for planting. They are designed for use in residential landscaping, small gardens, nurseries, hobby farms, and wild game food plots.



	7112	7116	
HORSEPOWER	20 - 30 HP	25 - 40 HP	
WIDTH	48"	60"	
WEIGHT	391 LBS	502 LBS	
NUMBER OF DISC BLADES	12	16	
DISC BLADE SIZE	16"		
DISC BLADE SPACING	7-1/2"		
BEARINGS	CAST		
HITCH	CAT 1		
QH COMPATIBLE	YES		
WARRANTY	1 YEAR		







7300 SERIES



TUBE FRAME DISC HARROW

	7316	7320	7324
HORSEPOWER	30 - 45 HP	35 - 45 HP	40 - 50 HP
WIDTH	60"	72"	84"
WEIGHT	650 LBS	700 LBS	750 LBS
NUMBER OF DISC BLADES	16	20	24
DISC BLADE SIZE	18"		
DISC BLADE SPACING	7-1/2"		
BEARINGS	SEALED		
HITCH	CAT 1		
QH COMPATIBLE	YES		
WARRANTY	1 YEAR		

These Tube Frame Disc Harrows are for medium-duty usage with notched discs which easily break up and redistribute cultivated topsoil. They will easily meet the needs of commercial landscapers, larger nurseries and gardens, as well as small farms.













3 7400 SERIES

HEAVY-DUTY TUBING DISC HARROW

Available in 3 different sizes, the 7400 Series heavy-duty tube frame disc harrow will work with tractors ranging in horsepower from 35 to 80. They will break up soil easily and redistribute cultivated topsoil. The harrows are a great choice for commercial landscapers, farms, ranches, and construction applications.













	7416	7420	7424
HORSEPOWER	35 - 60 HP	50 - 70 HP	60 - 80 HP
WIDTH	72"	92"	108"
WEIGHT	872 LBS	1,019 LBS	1,250 LBS
NUMBER OF DISC BLADES	16	20	24
DISC BLADE SIZE	20"		
DISC BLADE SPACING	9"		
BEARINGS	SEALED		
HITCH	CAT 1 CAT 1 & 2		CAT 1 & 2
QH COMPATIBLE	YES		
WARRANTY	1 YEAR		





With a choice of one-bottom or two-bottom, IronCraft's Moldboard Plows is a basic moldboard plow, best suited for gardens, nurseries, hobby farms, and wild game food plots. They are designed to turn over and aerate the soil for primary tillage, as well as bury residue and for tractors ranging in horsepower from 18 to 50.

COLOR OPTIONS




KEY FEATURES

AVAILABLE IN 12", 14", OR 16"

REPLACEABLE SHARE & MOLDBOARD



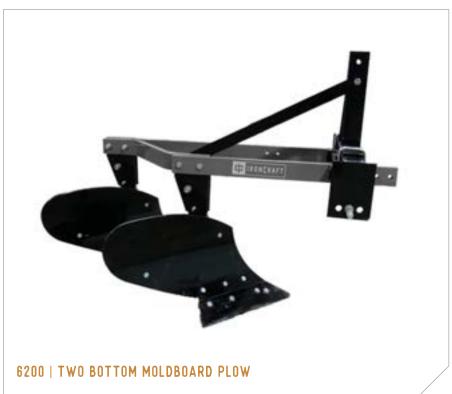

8100 SERIES



SPIKE AERATORS



The 8100 effectively perforates the ground to better accept air, sunlight, water, and nutrients into the soil. Each aerator spike is approximately 2-3/4 long and 2' wide at maximum depth. The depth and width of the hole can be controlled in three ways: by using just the weight of the aerator frame, by adding water to the 12-inch drum, and/or by stacking 16-inch blocks on top of the frame. Spike aerators, over plug aerators, have a less aggressive impact on the lawn and can be used throughout the year.











	8104	8105	8106	8107
WIDTH	48"	60"	72"	84"
HITCH TYPE		3-PT, CAT 1		
QH COMPATIBLE		YES		
WEIGHT EMPTY	295 LBS	338 LBS	382 LBS	427 LBS
WEIGHT FILLED	505 LBS	601 LBS	698 LBS	787 LBS
WARRANTY	1 YEAR			



WWW.IRONCRAFTUSA.COM

8200 SERIES

CORE PLUG AERATORS



Core plug holes provide the plant roots with better access to oxygen and improves the ability of the soil to hold water which could run off on non-aerated ground. These holes guide water and nutrients deep into the ground to reach the plant roots. With four models, you can size your aerator by the acreage being conditioned or by the size of your tractor. Models are available to aerate anything from a homeowner's lawn to an athletic field, municipal golf course, or farming application.











	8204	8205	8206	8207
WIDTH	48"	60"	72"	84"
HITCH TYPE		3-PT, CAT 1		
QH COMPATIBLE		YES		
WEIGHT EMPTY	367 LBS	429 LBS	490 LBS	551 LBS
WEIGHT FILLED	577 LBS	692 LBS	806 LBS	922 LBS
WARRANTY	1 YEAR			



The 9300BP Heavy-Duty Boom Pole is a lifting tool ideal for any farm or ranch. With a lift capacity of 1500 lbs., this versatile tool can lift heavy farming equipment, logs, car and truck engines, and much more. It has a welded lifting loop, and is Category l and ll quick hitch compatible for maximum versatility.

COLOR OPTIONS



KEY FEATURES

1500 LBS CAPACITY

CAT 1/2 HITCH

TUBE FRAME



9300 BU GRONE



The 9300BU Bale Unroller makes quick work of lifting, transporting, and unrolling round bales in farming and ranching operations. It is built to give you years of reliable performance, and is designed to work with 25 to 65 hp tractors. The bale unroller can handle bales up to 2,200 lbs. in widths of 4, 5, and 6 feet. It comes equipped with a storage stand and is category l and ll quick hitch compatible.









	KEY FEATURES
HORSEPOWER	25 - 65 HP
WEIGHT	375 LBS
MAX LIFTING CAPACITY	2200 LBS
CYLINDER	STANDARD
HOSES	STANDARD
BALE WIDTH	ADJUSTABLE 4', 5', OR 6'
HITCH	CAT 1 & 2
QH COMPATIBLE	YES
WARRANTY	1 YEAR



This utility sized auger will bore holes of 6", 9" or 12' diameter up to 45" deep. Strong and durable construction makes digging post holes for fence posts, or any number of other uses fast and easy. Our shear bolt driveline protection helps prevent equipment damage when unexpectedly contacting an immovable object. Our unit can operate on a variety of tractors within the 25 to 65 PTO horsepower range. Compatible with most Cat 1 and 2 three-point tractor hitches. The steel auger has replaceable, bolt-on cutting edges to maintain productive boring speeds throughout the life of the post hole digger.









	PHD
DESCRIPTION	STANDARD DUTY
TRACTOR CATEGORY	CAT 1 & 2
GEARBOX	3:1 RATION, 2" OUTPUT SHAFT
DRIVELINE	YOKE TS 6-SPLINE PTO
AUGER DIAMETER	6", 9", 12"
B00M	2-7/8' O.D. TUBING
A-FRAME	2-7/8' O.D. TUBING
OPTIONS	265 LBS
SHIPPING WEIGHT	265 LBS
WARRANTY	2 YEAR LIMITED
SAFETY SHIELDS	ON DRIVELINE, GEARBOX "U" JOINT, AND GEARBOX OUTPUT SHAFT
SHEAR BOLT	REPLACEABLE, ON INPUT SHAFT, TO PROTECT DRIVELINE, AUGER AND GEARS

9400 QH GONCE







Our Cat 1 & 2 Quick Hitch adapters make your day more efficient by being able to quickly switch from one attachment to another. Reduce attachment or release time to seconds versus minutes with this quick hitch system. Recommended for tractors of 50 horsepower, it works with all Cat 1 or 2 IronCraft products, including PTO driven attachments. The quick hitch comes with a set of adapter bushing to properly connect attachments to the hitch. Locking handles are aspiring loaded keeping the attachment securely fastened to the adapter. Top link height is adjustable, if necessary, to accommodate a wide variety of attachments.



	QUICK HITCH
HITCH CATEGORY	1 OR 2
DIMENSIONS (L X W X H)	30" X 8" X 24"
WEIGHT	68 LBS
MAX LIFTING CAPACITY	880 LBS
WARRANTY	1 YEAR



Introducing the Ironcraft 9510P and 9520P spreaders, your perfect tool for fertilizer spreading. This top-of-the-line spreader is equipped with a steel conical hopper and can handle granular or crystalline fertilizers with ease.

The 9510P spreader features a four or six fins spreading disc, which allows for even distribution of fertilizer across your fields. Don't settle for less when it comes to fertilizer spreading - choose the Ironcraft 9510P for unparalleled performance and reliability.





	9510P	952OP
CAPACITY	441 lbs	992 lbs
WEIGHT	119 lbs	139 lbs
DIMENSIONS	37.4 in x 37.4 in x 37.4 in	43.7 in x 43.7 in x 46 in
SPREAD	26.5-46 ft	26.5-46 ft
HORSEPOWER	20 HP	20 HP





Introducing the Ironcraft Auxillary PTO Hydraulic Kit! This kit is packed with features to give you the power and control you need to tackle any job with ease.

The kit comes with a 20-gallon reservoir tank that ensures you have enough hydraulic fluid for extended periods of use. The oil sight and temperature gauge on the reservoir makes it easy to monitor the fluid levels and temperature, ensuring that the system is always running at optimal performance.

	IC-AUXKIT
FLOW (GPM)	11.4 GPM
RESERVOIR TANK	20 Gallon
WEIGHT	400 lbs (when filled)




WITH OVER 600

IMPLEMENTS & ATTACHMENTS,



HAS YOU COVERED.

FIND YOUR NEAREST IRONCRAFT DEALER AT WWW.IRONCRAFTUSA.COM/DEALER-LOCATOR

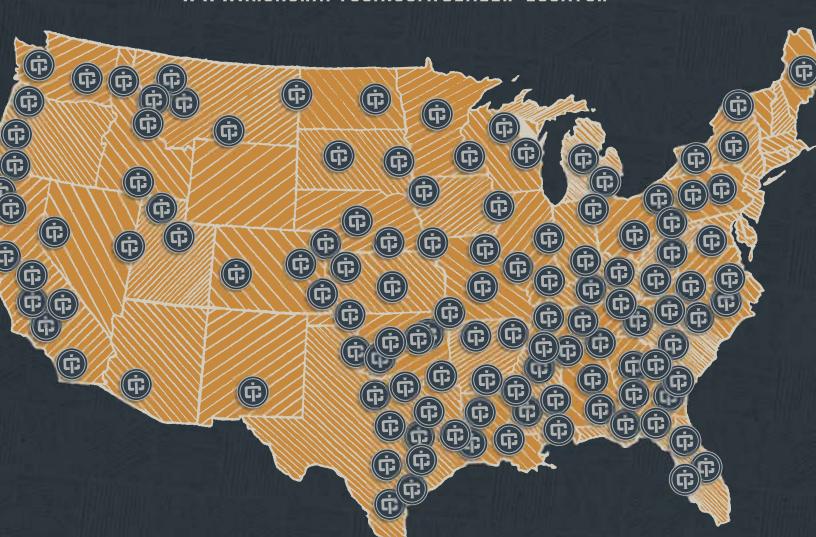



Standing by you IRONCRAFT WARRANTY

IRONCRAFT PRODUCTS ARE WARRANTED TO BE FREE FROM DEFECTS IN WORKMANSHIP OR MATERIALS FOR A PERIOD OF (12) MONTHS FROM INITIAL SALE.

WWW.IRONCRAFTUSA.COM/WARRANTY-CONDITIONS

