


VT-42FS-3

3-HOLE FIBER OPTIC WIRE STRIPPER

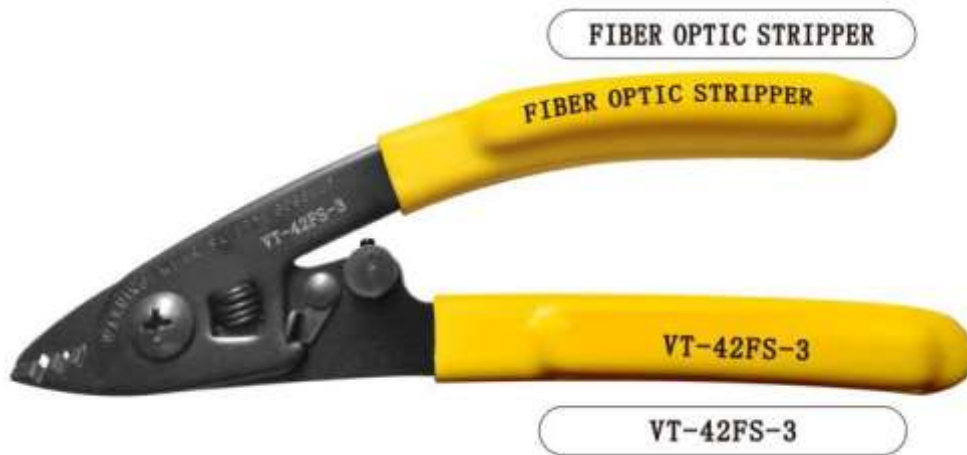

Features:

- Three hole design provides optimal stripping:
 - 1st Hole removes 1.6 to 3 mm fiber jacket
 - 2nd Hole removes 600 to 900 micron buffer
 - 3rd Hole removes 250 micron acrylate
- All stripping surfaces are quality manufactured to precise tolerances to ensure clean, smooth strips every time.
- Compliant thermoplastic elastomer handle grips.
- Factory set blade notches require no adjustment & will not scratch or nick the fiber.
- Ergonomically designed to fit comfortably in either hand, reducing the risk of injury from the repetitive stripping function.

Compatibility:

MODEL	WIRE SIZE Ø	1ST HOLE SIZING		2ND HOLE SIZING		3RD HOLE SIZING	
VT-42FS-3	1.6 mm to 3 mm	Removes	1.6 to 3 mm Fiber Jacket	Removes	600 to 900 micron Buffer	Removes	250 micron Acrylate
		Exposes	600 to 900 micron Buffer	Exposes	250 micron Acrylate	Exposes	125 micron Bare Fiber