




Strut-Lock™ Secondary Containment




Technical Information

- Flat Panel
- Panel Thickness: 3"
- Panel Height 12" coverage
- Panel Length: 8'
- Skin Thickness: Standard 40ga
- Skin Materials: Galvanized (G90)
Galvalume (Aluminum)
- Painted Top Flashing:
International Orange
- Core Material: Pressure Injected
High Temperature Polyurethane.
This product surpasses thermal
Testing in with CAN/ULC
S705.1-01

HFF Filter Installation



Cross Section and Connections

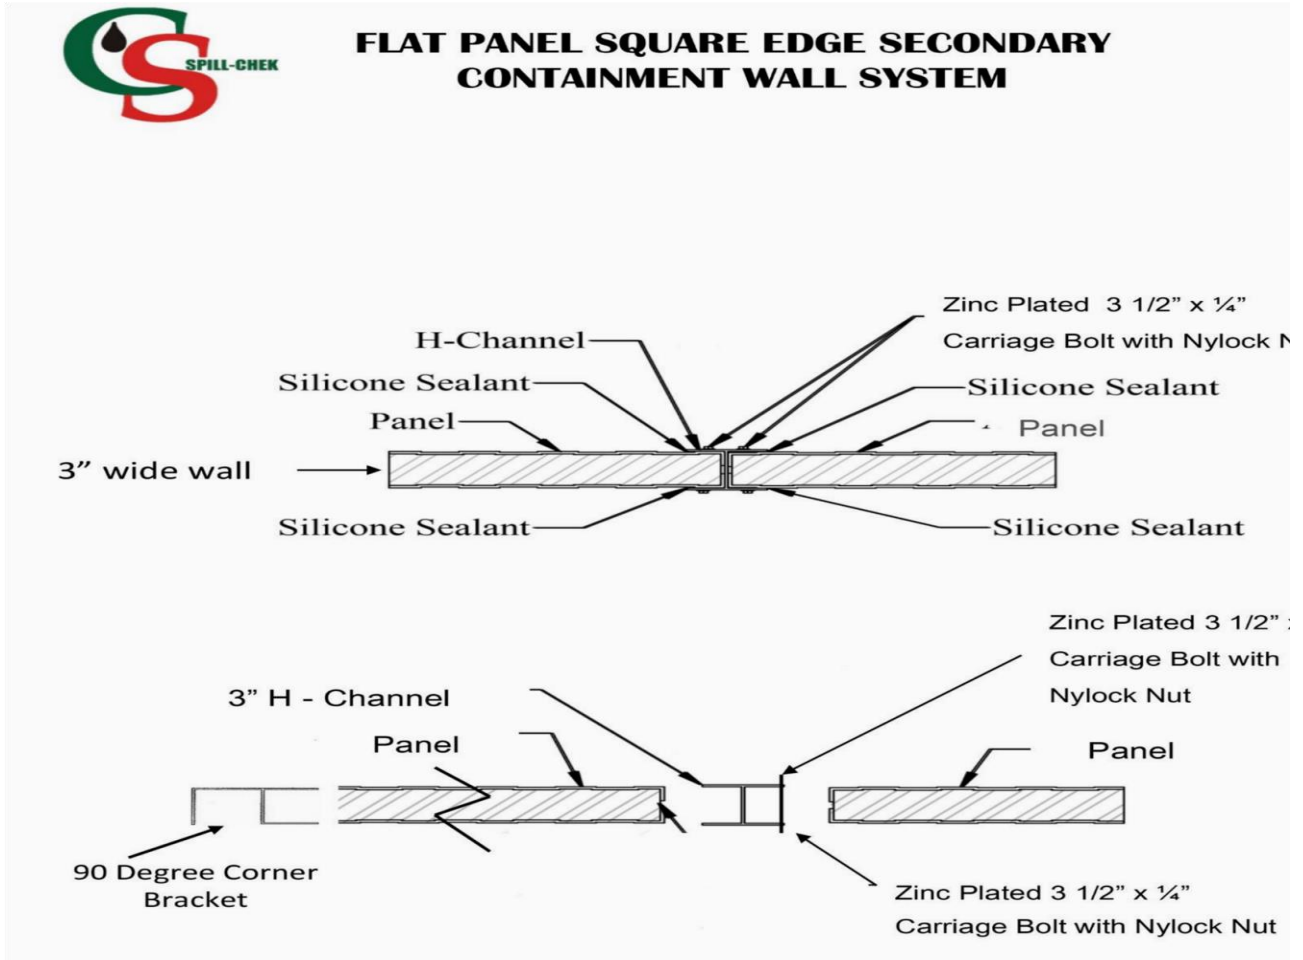

Strut-Lock™ is very easy to install with a two man crew.