



Safety helmets

CLASSIC

DIAMOND VI ● ● ● ● ● ●

 +50°C / -30°C
 440 VAC
 MM
 -LD-
 HARNESS VI

QUARTZ UP IV ● ● ● ● ● ●

 +50°C / -30°C
 440 VAC
 MM
 -LD-
 HARNESS VI

DIAMOND V ● ● ● ● ● ●

 +50°C / -30°C
 440 VAC
 MM
 -LD-
 HARNESS V

QUARTZ UP III ● ● ● ● ● ●

 +50°C / -30°C
 440 VAC
 MM
 -LD-
 HARNESS V

DIAMOND V UP ● ● ● ● ● ●

 +50°C / -30°C
 440 VAC
 MM
 -LD-
 HARNESS V

QUARTZ I ● ● ● ● ● ●

 +50°C / -30°C
 440 VAC
 MM
 -LD-
 HARNESS V

ZIRCON I ● ● ● ● ● ●

 +50°C / -30°C
 440 VAC
 MM
 -LD-
 HARNESS V

WORKING AT HEIGHT

GRANITE PEAK ● ● ● ● ● ●

 +50°C / -30°C
 440 VAC
 MM
 -LD-
 HARNESS VI

GRANITE WIND ● ● ● ● ● ●

 +50°C / -30°C
 440 VAC
 MM
 -LD-
 HARNESS VI

ELECTRICAL WORK

ONYX2 ● ● ● ● ● ●


 +50°C / -30°C
 440 VAC
 MM
 -LD-
 HARNESSO
 VISONYXPR

FORESTRY WORK

FORESTIER3 ● ● ● ● ● ●

 +50°C / -30°C
 440 VAC
 MM
 -LD-
 HARNESSO
 VISONYXPR

STEEL INDUSTRY AND METAL FOUNDRY WORK

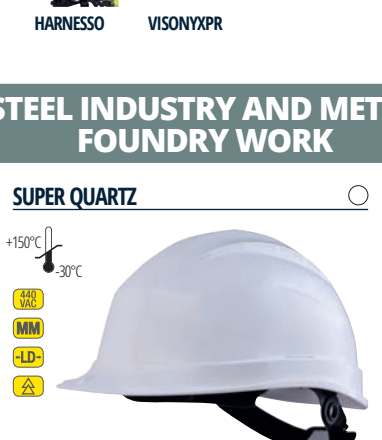SUPER QUARTZ ● ● ● ● ● ●

 +50°C / -30°C
 440 VAC
 MM
 -LD-
 HARNESSO
 VISONYXPR

EN397 Temperature
 +50°C / -30°C
EN397 Electrical insulation
 440 VAC
EN397 Molten metal splashes
 MM
EN397 Lateral compression
 -LD-
EN50365 Electrical insulation
 440 VAC

Bump caps

MAKAN ● ● ● ● ● ●



AIR COLTAN

 COLTAIJFL - 7 cm
 COLTAAINOMI - 3 cm
 COLTAAINOSH - 5 cm
 COLTAAINOLG - 7 cm
 COLTAIBMSH - 5 cm
 COLTAIBRM - 7 cm
 COLTAIGRMI - 3 cm
 COLTAIGR - 7 cm

Accessories

DYNAMIC JUGBETA

 GRANITE
 QUARTZ
 ZIRCON

DYNAMIC JUGALPHA

 GRANITE
 QUARTZ
 ZIRCON

JUGGAMMA

 GRANITE

FUEGO

 GRANITE
 QUARTZ
 ZIRCON

WINTER CAP

 GRANITE
 QUARTZ
 ZIRCON

NECKALPHA

 GRANITE
 QUARTZ
 ZIRCON

BADGEU

 GRANITE
 QUARTZ
 ZIRCON

MENTALPHA

 GRANITE
 QUARTZ
 ZIRCON

JUGALPHA

 GRANITE
 QUARTZ
 ZIRCON

HARNES V

 GRANITE

HARNES VI

 GRANITE

HARNES O

 GRANITE

VISIONYXPR

 GRANITE

HESTICKER

 GRANITE
 QUARTZ
 ZIRCON

BASGAMMA

 GRANITE
 QUARTZ

BASALPHA

 GRANITE
 QUARTZ
 ZIRCON

Ear defenders

PITRADIO3 27 dB
 H 31 M 24 L 16
 343 g

MAGNYCOURS2 33 dB
 H 34 M 32 L 25
 338 g

MAGNYHELMET2 30 dB
 H 32 M 28 L 22
 286 g

INTERLAGOS 30 dB
 H 30 M 28 L 20
 286 g

INTERLAGOS FO 30 dB
 H 39 M 29 L 19
 282 g

INTERLAGOS NB 28 dB
 H 33 M 26 L 15
 247 g

INTERLAGOS LIGHT 26 dB
 H 30 M 24 L 15
 200 g

INTERLAGOS LIGHT HE 26 dB
 H 29 M 24 L 16
 249 g

SUZUKA2 24 dB
 H 27 M 21 L 14
 252 g

SPA3 23 dB
 H 24 M 20 L 13
 155 g

INTERHYKIT

 ACCESSORIES (INTERLAGOS)

Reusable earplugs

CONICFIRDE 34 dB
 x10
 H 33 M 32 L 31
 ø 8-12 mm
 DETECTABLE
 Plastic
 TPR

CONICFIR 34 dB
 x10
 H 33 M 32 L 31
 ø 8-12 mm
 Textile
 TPR

CONICFIT 32 dB
 x10
 x100
 H 32 M 29 L 28
 ø 8-12 mm
 Plastic
 Silicone

CONICSOF 26 dB
 x10
 H 25 M 23 L 22
 ø 8-10 mm
 Textile
 Silicone

Disposable earplugs

CONICDE 37 dB
 x200
 H 34 M 34 L 31
 ø 7-12 mm
 DETECTABLE
 Plastic
 PU

CONICCO2 37 dB
 x200
 H 34 M 34 L 31
 ø 7-12 mm
 Plastic
 PU

CONICCOPLUS 35 dB
 x200
 H 35 M 33 L 30
 ø 6-15 mm
 Plastic
 PU

CONICAP2 01 27 dB
 x1
 H 29 M 24 L 22
 ø 8-18 mm
 Foldable Headband
 PU
 CONICAP01BR

CONIC2 37 dB
 x10
 x200
 x500
 H 34 M 34 L 31
 ø 7-12 mm
 PU

CONICDISPLAY 37 dB
 x500
 H 35 M 33 L 30
 ø 7-12 mm
 PU

CONICPLUS 35 dB
 x200
 H 35 M 33 L 30
 ø 6-15 mm
 PU

CONICMOVE 26 dB
 x1
 H 31 M 25 L 23
 ø 12-17 mm
 Ergonomic Headband
 PU
 CONICMOVE01BR

enjoy safety.

Protection against noise

Standards

EN352
Safety requirements and tests

EN352-1
the ear-muffs

EN352-2
the earplugs

EN352-3
Ear muffs fitted to hard hats


EN352-4
Noise cancelling headphones with level dependent attenuation

EN352-6
Earmuffs with electrical audio input

EN352-8
Audio enabled earmuffs

EN458
Hearing protection


Attenuation values for noise

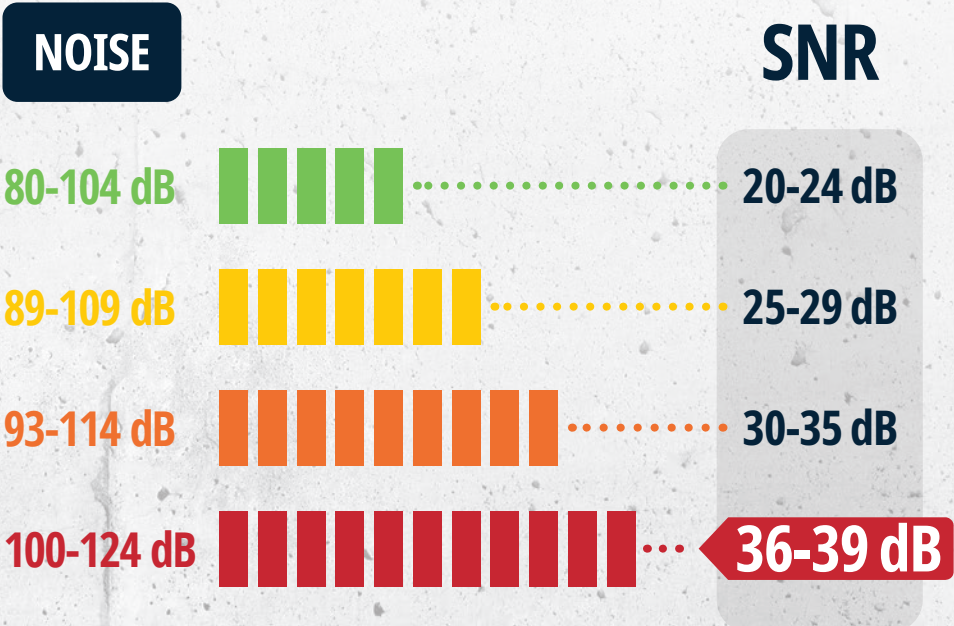

Noise protection ladder

SPA3 23 dB	SUZUKA2 24 dB		
INTERLAGOS LIGHT 26 dB	INTERLAGOS LIGHT HE 26 dB	CONICSOF 26 dB	CONICMOVE 26 dB
PITRADIO3 27 dB	INTERLAGOS NB 28 dB	CONICAP2 01 27 dB	
MAGNYHELMET2 30 dB	INTERLAGOS INTERLAGOS FO 30 dB	CONICFIT 32 dB	MAGNYCOURS2 33 dB
CONICFIRDE 34 dB	CONICFIR 34 dB	CONICCOPLUS 35 dB	CONICPLUS 35 dB
CONIC2 37 dB	CONICDE 37 dB	CONICCO 37 dB	

09/2025 - n°1755B - DOCEN1755B - EN - This is a non-contractual document subject to printing errors, reproduction is prohibited.

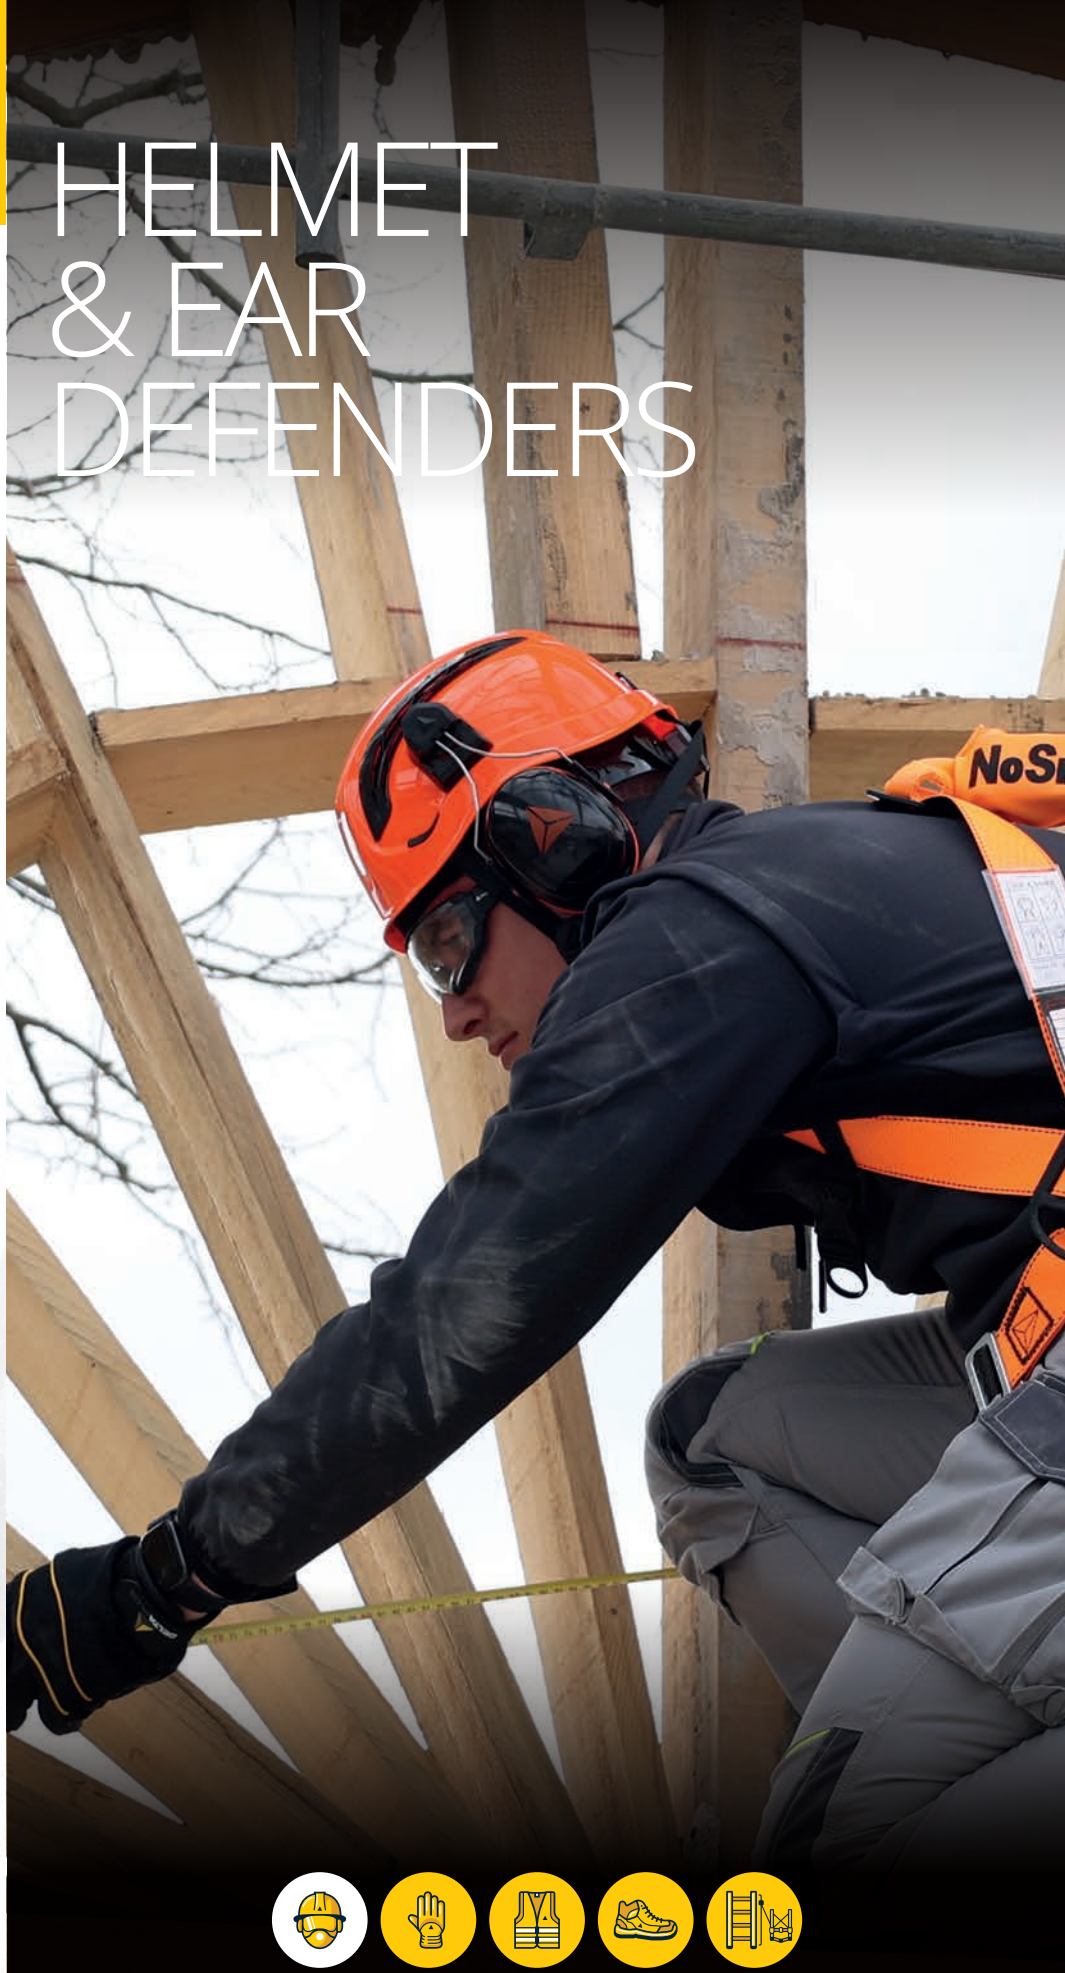

HELMET & EAR DEFENDERS



enjoy safety

European regulation

EN397

Protective helmet for industry

Mandatory tests

Impact



Penetration



Flame resistance



Chin strap resistance



Optional tests

EN397

440 VAC

MM

-LD-



EN50365

Electrical insulation
1 000 VAC
1 500 VDC



Available compositions

Delta Plus helmets



Check product compatibility on our website
www.deltaplus.eu



Customise your safety helmets

The logo sent must be in vectorised format (.eps, .ai, or .pdf) and must not have different colour background of the chosen helmet.

- For logos in colours, please indicate the pantone reference for each colour.
- Warning: the colours of the logos can be slightly changed according to the colour of helmets. To have the same colour as your logo, we recommend that you choose white helmets.
- It is impossible to do gradient colours in pad printing.
- Minimum of order: 40 pieces per colour for all orders in Europe.
- Maximum number of colours: 4
- The space to put the logo may not exceed dimensions shown on the table below:

	Front	Back	Sides
ZIRCON	 70 x 40 mm	 60 x 20 mm	 40 x 20 mm
QUARTZ SUPER QUARTZ	 70 x 40 mm	 60 x 35 mm	 60 x 20 mm
GRANITE	 70 x 40 mm		
DIAMOND	 70 x 40 mm	 60 x 20 mm	 70 x 40 mm
ONYX	 60 x 35 mm		

Printing zone

Maximum logo size

BADGEU

Removable badger holder compatible with the DELTA PLUS range.

