
Slanted Ladder Bracelet



Slanted Ladder Bracelet

Instructions by Joyce Trowbridge

Materials:

- 36 6mm Czech beads in three colors,
(12 each in Color A, Color B, and Color C)
- 60 3mm round metal beads
- 2 feet of Fine SoftFlex beading wire
- 2 Crimps
- 1 Clasp

Tools:

- 1 Mat
- 1 Crimper
- 1 Wire Cutter



Step 1

A) String one side of the clasp onto 2 feet of fine SoftFlex beading wire. Let clasp slide to center of wire. Bring both ends through a crimp tube. Use a crimper to crimp the crimp.



B) Bring both ends through a 3mm round metal bead.




Step 2

A) Separate the two wires. On the left side string two 3mm and one Color A. On the right side string one 3mm, one Color A and one 3mm.



B) String one 3mm on one side. Take the other side and cross through same bead.




Step 3

A) On the left side string one 3mm and one Color B. On the right side string one Color B and one 3mm.



B) String one 3mm on one side. Take the other side and cross through same bead.

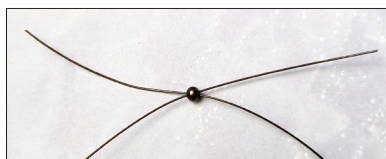

Step 4

On the left side string one 3mm and one Color C. On the right side string one Color C and one 3mm. String one 3mm on one side. Take the other side and cross through same bead. (Repeat this step, alternating the colors A, B, and C until you reach one set short of the desired length)



Step 5

On the last set of beads:

On the left side string one 3mm, one 6mm (the next color), and one 3mm. On the right side string one 6mm (same color as the left) and two 3mm bead.



Step 6

Bring both ends together and string one 3mm bead.



Step 7

With both ends together, string one crimp tube and other part of the clasp. Go back through the crimp tube. Use a crimper to crimp the crimp tube.

