
Wobble Lane Bracelet



Wobble Lane Bracelet

Instructions by Joyce Trowbridge

Materials:

10 10x20mm Double Drill Stone Beads (DD)
20-28 4mm Round Stone Beads (4R)
10 TierraCast Four Flower Spacer Beads (FF) ♦
10 6mm Metal Stardust Round Beads (6R) ♦
4 feet Opelon Stretch Jewelry Fiber


♦ Or substitute your favorite spacer and large hole 6mm bead.

Tools:

Big Eye Needle
Scissors
Bead Stopper
Bead Mat
E6000 or GS Hypo Cement



Step 1: Cut 2 feet of Opelon. Slide a Big Eye Needle to the center of the Opelon. Attach a Bead Stopper a couple of inches from the tail ends.

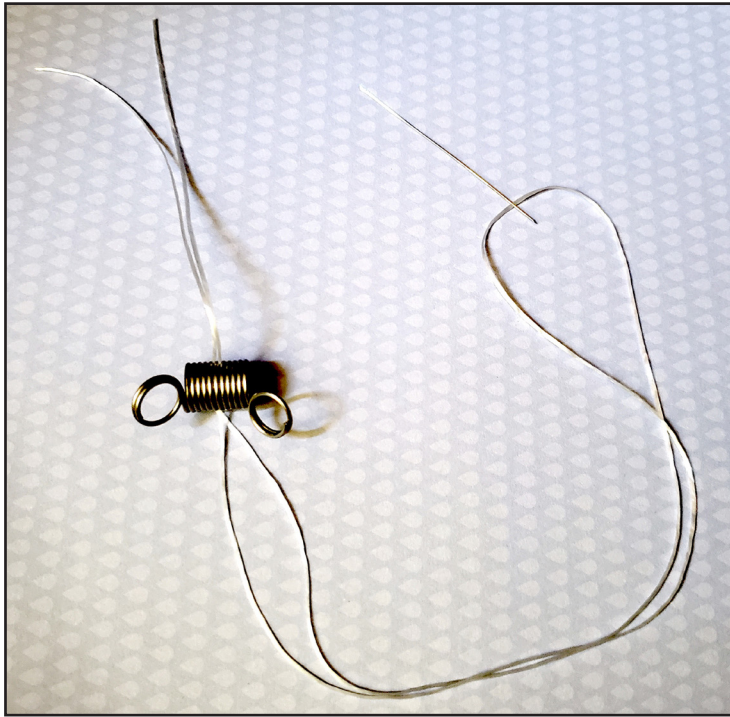

Step 2: String 1 6R, 1 DD, 1 4R, 1 FF, 1 4R, and 1 DD.



Step 3: Repeat the pattern from Step 2 for a total of 5 sets.

**See adjustment A for larger bracelet.*




Step 4: Tie the two ends together with a surgeon's knot. Test to see if knot fits in the 6R it is next to. Do not glue or trim yet.



Step 5:

a) Cut 2 feet of Opelon.

Slide a Big Eye Needle to the center of the Opelon. Attach a Bead Stopper a couple of inches from the tail ends.

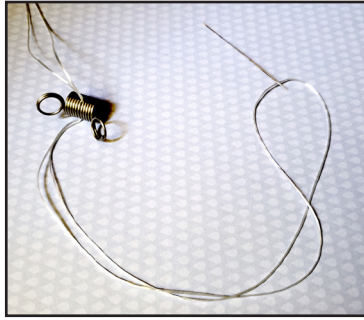

b) String 1 6R.



Step 6:

a) Find a 4R-FF-4R combo away from the knotted ends of the next Step 4. Go through the second hole of the next DD.



b) Pull snug so the 6R is nestled up against the DD and next to the 4R-FF-4R combo.



Step 7: String 1 4R, 1 FF, 1 4R. Go through the second hole of the next DD.



Step 8: Continue adding beads and going through the second hole of the next DD, alternating between adding 1 6R and 1 4R, 1 FF, 1 4R, until you reach the tail end.

**See adjustment B for larger bracelet.*



Step 9: Tie the two ends together with a surgeon's knot.



Step 10: Add glue to the knots. Let knots pop into the hole of the 6R. Trim ends.



***ADJUSTMENTS FOR LARGER BRACELET**

A. Change last repeat of pattern to
1 4R, 1 6R, 1 4R and 2 4R, 1 FF, 2 4R.



B. Remember to add
2 4R, 1 FF, 2 4R and 1 4R, 1 6R, 1 4R
to the appropriate sections between the DDs.

