


Specification Sheet FL-3-L LIQUID UTILITY TORCH

Combustion Technology & Custom Metal Fabrication

2299 Childs Lake Rd. • Milford • MI • 48381 • 800-878-2876

Liquid propane coil style torches are used when quick spot heating is required. The long, two handled design allows the operator a convenient and easy way to operate the torch for long periods of time. This coil style torch incorporates an on-board, liquid vaporizer. This allows you to fuel the burner directly with liquid L.P. Gas (liquid withdrawal propane).

*IMPORTANT - The use of liquid L.P. Gas requires the use of special system components and a hydro-static pressure relief valve. Please refer to NFPA-58 and your local municipal governing agency.

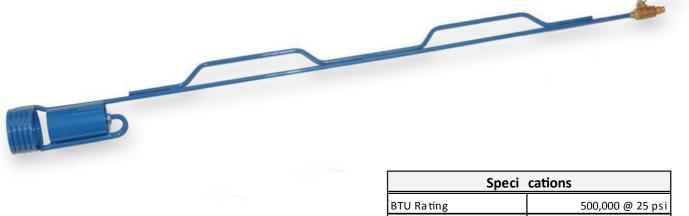

- Easy To Use
- Two Handled Design
- Fully Welded Construction
- Every Unit is Function Tested
- Shipped with HD Brass Valve
- Includes Adjustable Air Shutters

Speci cations	
BTU Rating	500,000 @ 25 psi
Fuel	Liquid L.P. Gas (propane)
Fuel Connection	9/16" - 18 LH (Ball Seat)
Coil Diameter	4-3/4"
Coil Material	1/4" Mild Steel
Length	60"
Height	7"
Weight	8 lbs.
Color	Blue

visit us online: www.burnersinc.com

GUARANTEE

All equipment is guaranteed to be free from defect in either material or workmanship. All equipment is guaranteed to the extent of operating specifications of the equipment. No claim will be allowed for subsequent damage caused by improper installation, improper use (misuse), neglect, or improper fuel and/or electrical supply (if applicable)

While this information is presented in good faith and believed to be accurate - Burners, Inc. does not guarantee satisfactory results from reliance upon such information. Nothing contained within this document is to be construed as a warranty or guarantee, expressed or implied, regarding the performance, merchantability, fitness or any other matter with respect to this product, nor as a recommendation to use this product in a specific application. Burners, Inc. reserves the right, without notice, to alter, or improve the designs or specifications of the product, described herein.