TOBi P.I. BLuE™

Your Bluetooth Enabled Battery Companion

Effortless battery care, event records, now compatible with iOS & Android.

BENEFITS



Bluetooth enabled – iOS & Android compatible.



Waterproof & battery acid resistant.



TOBi report suite.



For use on 12-80V batteries.



Communicates automatically to the 305 control.

TOBi PI BLuE



WATER LEVEL



St. Louis, MO U.S.A.

95FFFED493E4

Contains FCC ID: QOQMGM13P Contains IC: 5123A-MGM13P

Input Voltage Rating: 12VDC



AS TO FIRE AND ELECTRIC, SHOCK HAZARD ONLY ELECTRICAL ACCESSORY FOR USE IN INDUSTRIAL TRUCKS AU6503

Meet TOBi P.I. BLuE, measuring just 3"L x 1.5"W x 0.41"H. This compact device transforms battery maintenance. With Bluetooth compatibility for iOS and Android, a waterproof enclosure, and precise event records, it simplifies care. No welding or strap removal needed during its quick 15-minute installation. Experience hassle-free battery management with TOBi P.I. BLuETM.

Phone: 314-739-1414

Fax: 314-739-1277

E-mail: Sales@chargingti.com

Charging Technologies Inc™
4328 Bridgeton Industrial Drive

Bridgeton, Missouri 63044

chargingti.com TOBI-BLUE-01122024



TOBi P.I. BLuE™



Download TOBi BLuE™

Scan the QR code on your perferred app store to download.











Watch Installation Instructions





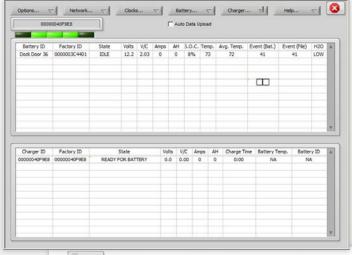

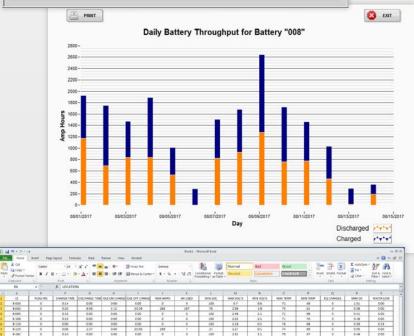

X Cut Q Copy + √ Formal har- lessoned	General B Z	1 1 E 1 0			語 was fee 語 Merge & Center・	5 - % +		Conditional Format Formatting - as Table	Normal	Cavalation	Good		ent Streete France	Q Cest -	Son a read Filter Select
Di		A LOCATIO		ergrani		N. Miles	-			1941			1,011		Hory.
												400	100	-	
A			6	partie House	DIZ OFF D-AVGS	MAIL AMPS	*		М	N	0		0		5
0	PLUG-INS	DHARGETIME					An USED	MIN SOC	MAK VOLTS	MIN YOUTS	MAX TEMP	MINTENP	EQUIPMES	MAN DV	WATERLOW
9-035 9-043		0:14	619	0:00	20:29	264	187	78	6.7	84	72	58		1.61	0.00
	. 0			2:12					259	19	.75	.62	0	0.58	0:00
8-065	0	0.10	0.00	0.00	0:00	0	- 1	100	248	21	n	16 70		0.41	0.00
8-100		010	0.00		0.00	0									0.00
8-120	0	0:00	0:00	0:00	0:00	0	- 1	100	2.18	- 61	76	58		0.29	0.29
9-225	- 0	0.06	227	0.00	2950	258	7	23	227	0.1	74	19		0.35	0.00
8-782	0	0:10	0.00	0.00	0.00	0		100	2.83	2.1	78	67	0	0.49	0.00
8-155		0.10	012	0.00	0:57	35		22	227	- 01	71	58	0	0.46	0.33
9-257	. 0	011	0.00	0.00	0.00	0		100	2.27	01	76	18		0.49	0.00
5-294	1305	66:11:00	61:30:00	167-06-00	0.25	255	316	96	2.79	01	85	16	- 0	0.44	0.04
8-294	1305	66/11/00	82:30:00	367.06.00	0.25	253	316	36	2.79	0.1	85	. 16	0	0.44	0.04
9.464		0.09	054	3:00	22:13	270	- 41	- 12	2.25	3.6	72	68	-	0.49	0.00
9-505		0.00	000	0.00	0:00	0		100	2.04	21	75	57	0	0.81	0.29
9-522	. 0	000	0.00	0.00	0.00	0		100	2.04	0.1	76	72	0	0.47	0.00
9-530	- 0	0.10	0.00	0.00	0.00	. 0.		100	2.6	2.5	77	68		. 0.44	0.00
8-577	. 0	103	1136	21:21	924	225	190		7.5	1.6	-22	71	. 0	0.57	0.00
5:624	. 0	0.00	0.00	0.00	0.00	0		100	2.05	1	n	73	0	0.5	0.00
5-095	. 0	0.00	0.00	0.00	0.00	0		100	207	21	.71	67	4.	0.49	0.00
\$-758	. 0	0.11	0.00	0.00	0.00	0		100	2.27	21	76	. 70	0	9.46	0.00
TOW See									840						





Phone: 314-739-1414

Fax: 314-739-1277

E-mail: Sales@chargingti.com

chargingti.com

Charging Technologies Inc™

4328 Bridgeton Industrial Drive Bridgeton, Missouri 63044

TOBI-BLUE-01122024

