


Safety Details

Techmine Solutions designed & certified a smart ultra light weight product. Its designed to lift & secure both the trough belt & return



- Hydraulic pressure by-pass as not to exceed the safe load limit
- Techmine pressure gauge giving the user access to actual loads being lifted
- Techmine convertor pack allows the stored energy to lift and descend in a controlled manner.

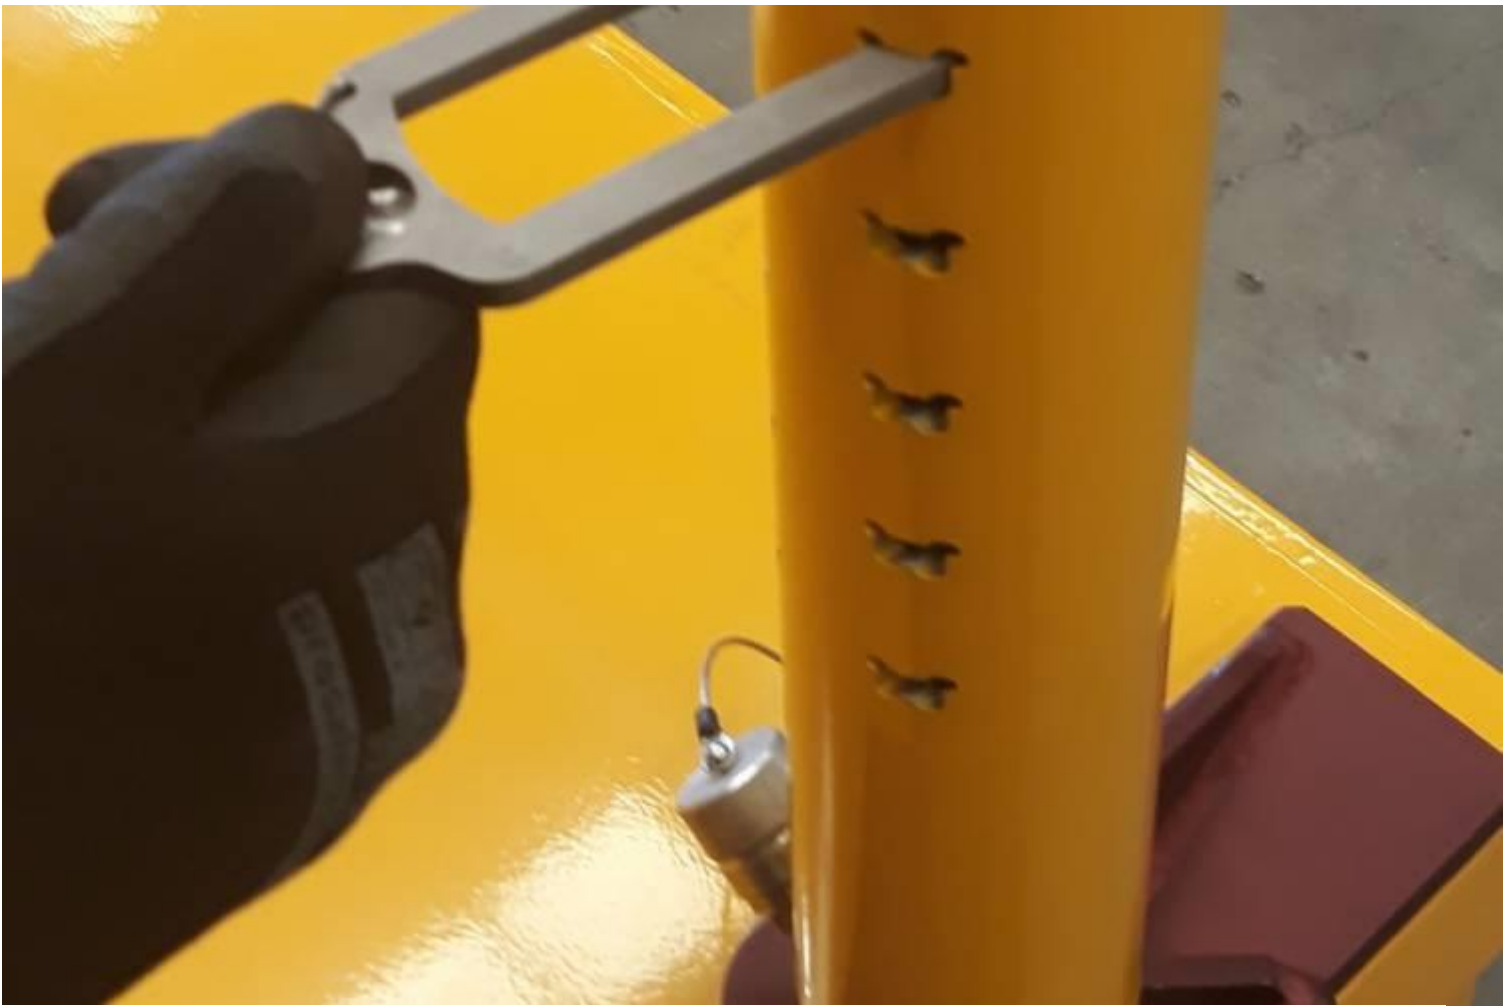

- Ability to lift, pin and secure load to be able to access under the belt.
- Multiple lock off points if weight limits are reached before full extension.
- This allows the hydraulics to be disconnected from the telescope and moved to another Techmine lifter for raising.



- **Technine Telescopes come with a magnetic foot to secure to stringers whilst setting up.**
- **For added safety with use on Incline conveyor systems.**
- **Ultra lightweight telescope assembly**



- Ultra-light weightlifting beams with 1t, 1.5t and 2t lifting capacity.
- Designed and built to fit the profile and load limit of your belt as not to damage belt cords.
- Dramatically removes fatigue and exerted manual handling efforts that are historically present in this task.



- Ability to safely lift belt and expose 6 idler frames either side of Techmine Lifter
- Ability to safely lift both Trough Belt and Return belt simultaneously
- Ability to safely lift, secure and tent the conveyor belt 10 idler frames apart for mass roller change out.