

GOMANLIFT

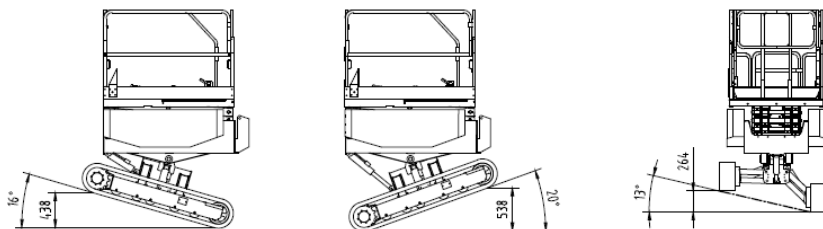
Crawler Scissor-lift S05C GS2743C



Standard Parameters

Model	S05C	
Max. work height	8.20m	27'
Max. platform height	6.20m	20.3'
Load capacity	230kg	500lb
Overall stowed Length	1977mm	78"
Overall Width (minimum, maximum)	1240/1443mm	49"/57"
Overall stowed height (rail up)	2259mm	89"
Overall stowed height (rail folded)	1926mm	76"
Max. working radius	0	
Size of platform 1.1m/43" high	1.635*1.185m/ 64"*46.6"	
Platform extension	0.90x1.11x1.08m/ 35.4"x43.7"x42.5"	
Front leveling angle	16 °	
Rear leveling angle	20 °	
Cross leveling angle	13 °	
Total weight	2025kg/4460lb	
Driving speed km/h	0-2.5	
Max. work slope	20%	
Max. climbing ability	30%	
Standard: dual power sources	Lithium Battery 24V 160Ah + AC 2hp	
Optional power(length varies*)	6.5hp Gas engine or diesel engine	

Note: *We reserve the right to change the data without notice.

Dimension:**Standard Features**

- Automatic leveling, simple control console
- suitable for tracking and working on uneven and rough terrain
- Easy operation, with gravity lowering (emergency lowering)
- Weight dispersal low ground pressure
- Hydraulic adjustable rubber crawlers
- Made of high tensile steel
- Optional: platform can slide to the side about 200mm

