

GOMANLIFT



self-levelling Tracked-lift X08/GX26





Standard Parameters

Model		X08	GX26
Max. work height	m	8.00	26′
Max. platform height	m	6.00	20′
Load capacity	kg	136	300lb
Lateral Outreach	m	2.9	9.5′
Turntable rotation		360° non-continuous	
Size of platform	m	0.9*0.7*1.1	
Overall stowed length	m	2.53	100″
Overall stowed width	m	1.39	45″
Overall stowed height	m	1.70	67″
Max width extension	m	1.67	65.7″
Total weight	kg	1085 lithium battery/ 1140 gas engine	
Track speed with battery km/h		0-5.0	
Track speed with engine km/h		0-3.0	
Work slope		17 ° （10 ° side up）	
Dual Power for hydraulic drive: (One Power in case of DC drive)			
lithium battery 24V		140Ah	
gas engine + AC 1.5hp		Vanguard V25	

*we reserve the right to make technical alternation.

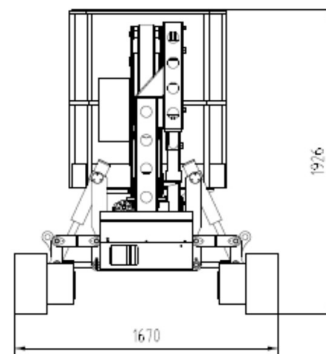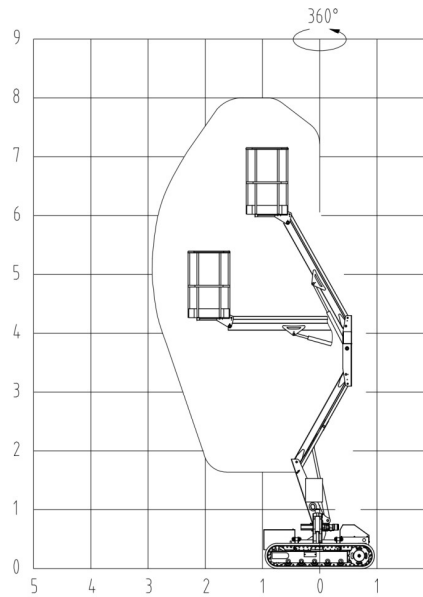

Dimension for X08

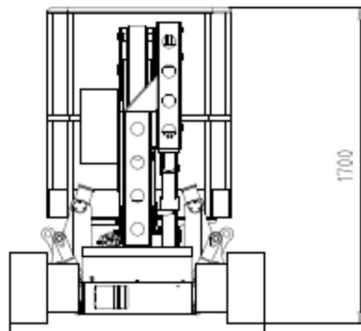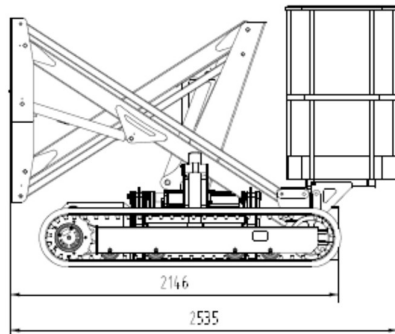

Standard Features

- ▶ German made controller and quality components, HMI interface
- ▶ Lowering (emergency lowering) without power
- ▶ Allow traction at 0.3km/h under $\pm 1.5^\circ$ unless intervention
- ▶ Load sensor and detachable basket
- ▶ Compact design for indoor and outdoor use, dual axle adjustable
- ▶ Double axle adjustment allowing work in slope
- ▶ radio control;
- ▶ Adjustable crawlers feature narrow access
- ▶ AC 16A outlet in basket
- ▶ 360°non-continuous turntable rotation
- ▶ Made of high tensile steel
- ▶ Comply with standards of ISO, CE and ANSI/CSA



Goman Lift Tel: 514 318 6826 gomanlift@outlook.com

Address: 5589 Ch Saint Francois, Saint Laurent, QC H4S 1W6

Distributed by: