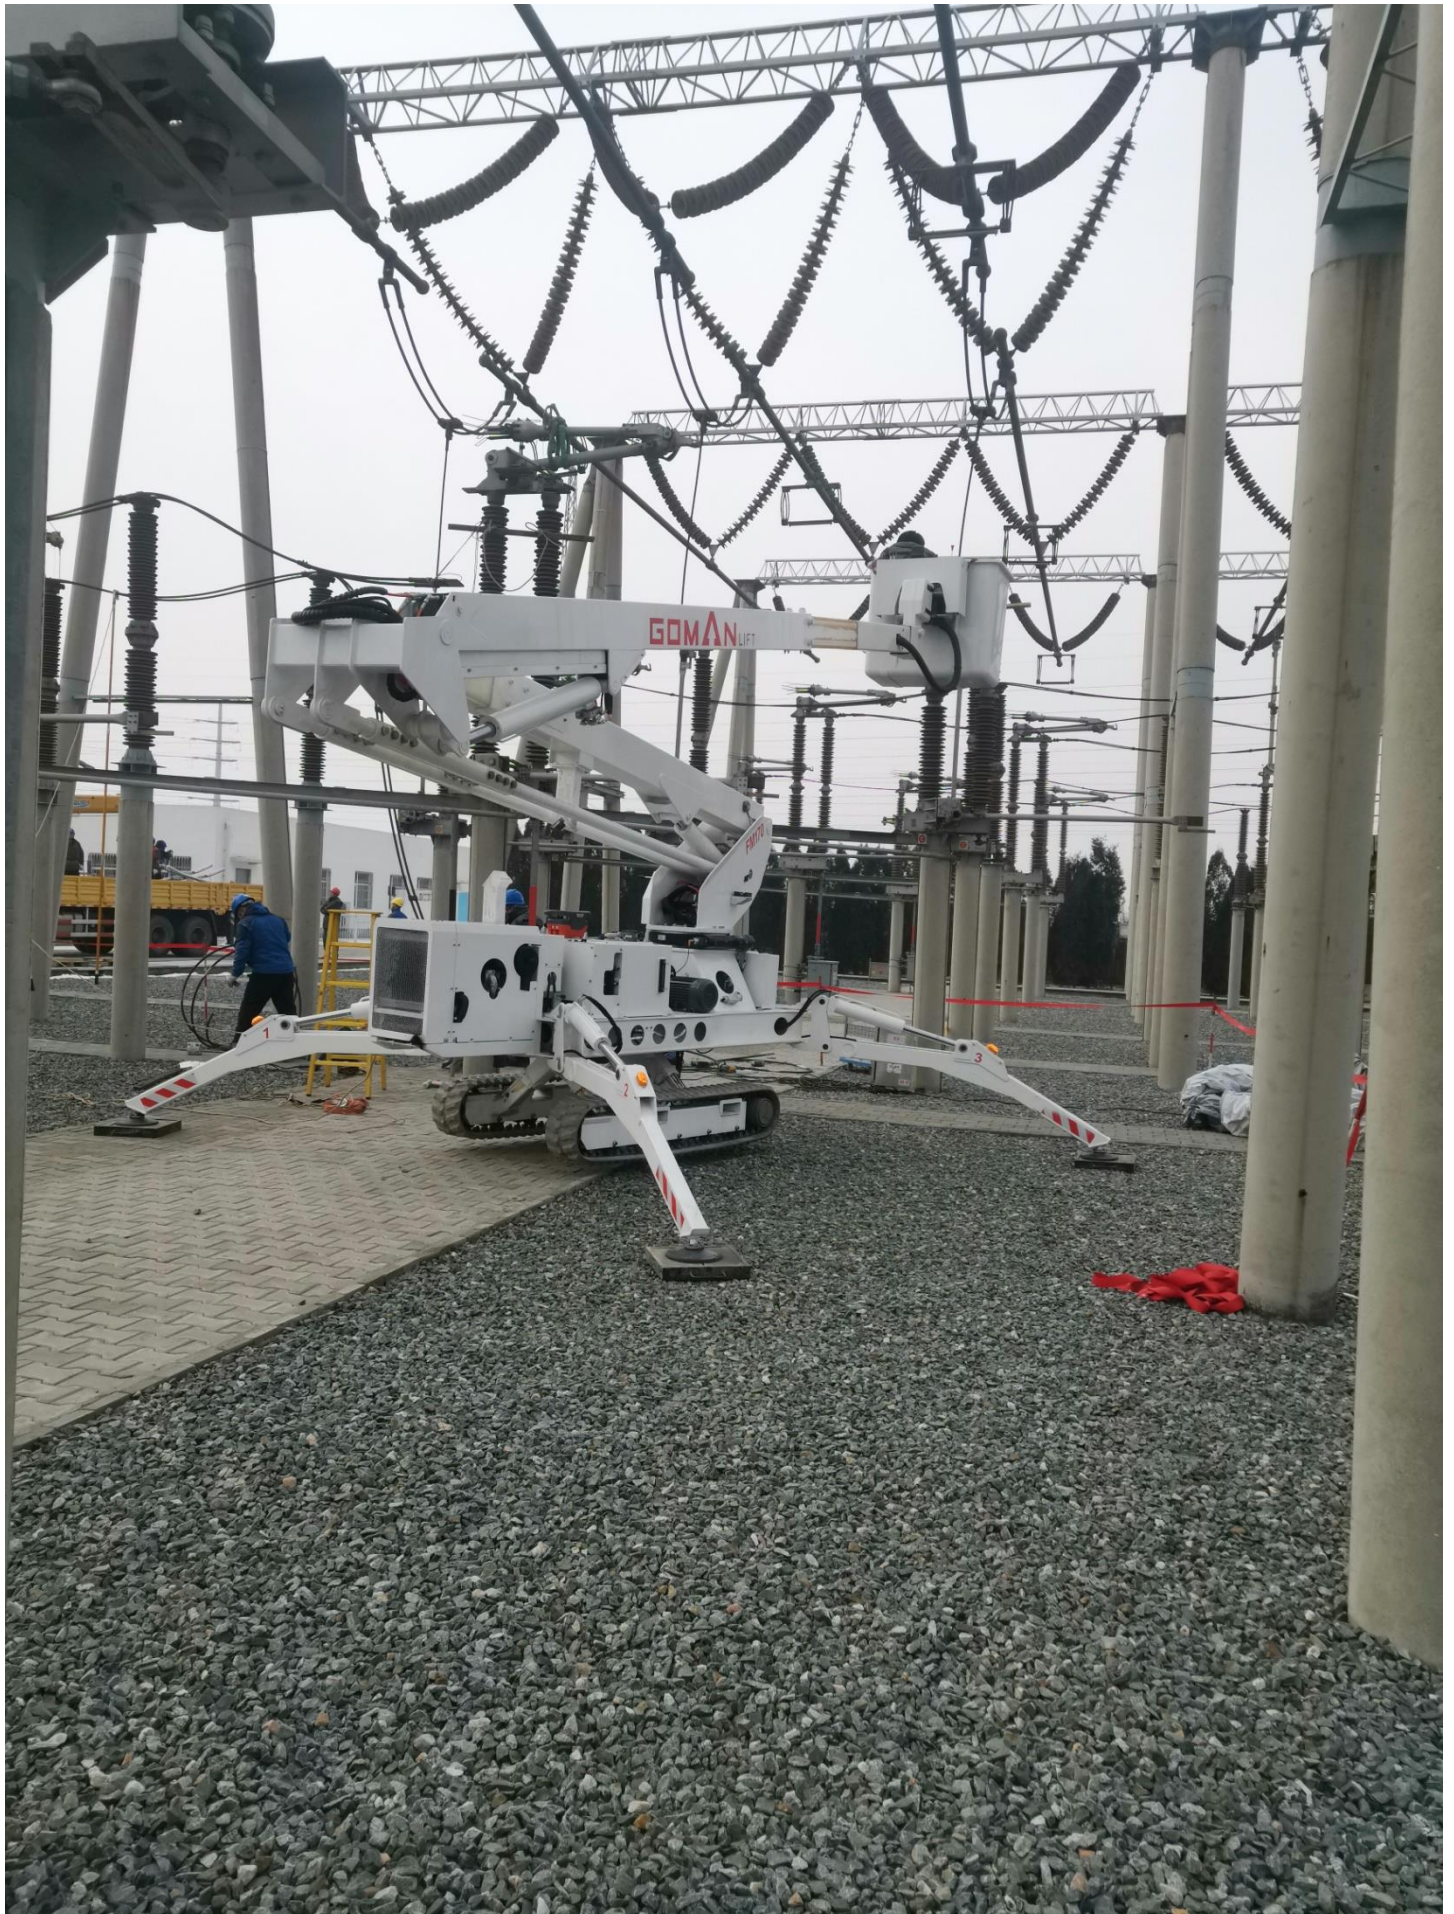


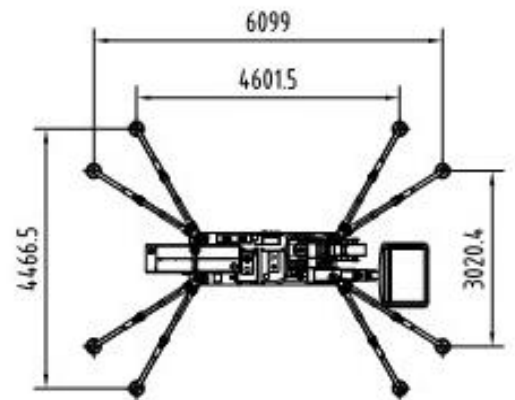
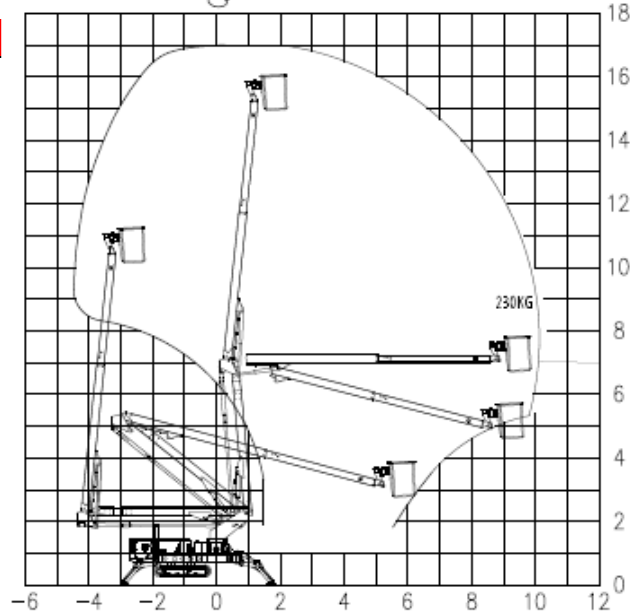
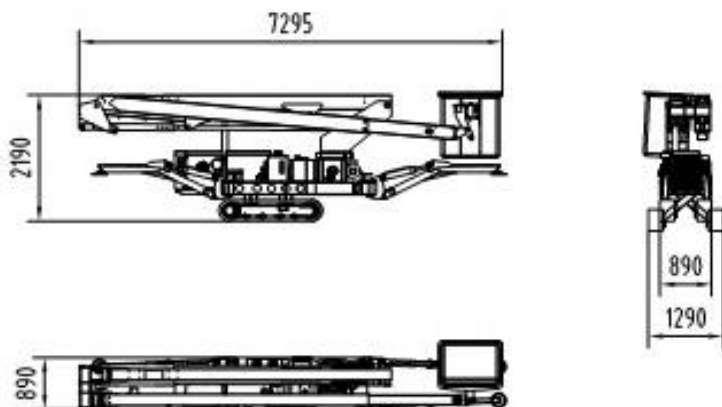
GOMANLIFT

46KV Insolated Spider Lift - X17E/GX56E



Standard Parameters

Model	X17E	GX56E
Max. work height	17.00m	56'
Max. platform height	15.00m	49'
Load capacity	230kg	507lb
Lateral Outreach	9.80m	32'
Jib rotation	90°	
Turntable rotation	359°	
Size of platform	1.2*0.6m	48" x 24"
Overall stowed length	7.30m	287"
Overall stowed width	0.89m	35"
Extendable width	1.29m	51"
Overall stowed height	2.19m	86"
Outrigger support size (Wide leg)	4.47*4.60m	176" x 181"
Outrigger support size (Narrow leg)	3.02*6.10m	119" x 240"
Driving speed km/h	0-2.5	
Max. work slope	20%	
Max. climbing ability	30%	
Total weight	3800kg	8370lb
Power source: diesel engine	Yanmar/Kubota	18KW

Technical data

Features:

- ▶ 35" width, compact design for backyard use
- ▶ Dual leveling bars for safety; forklift boots for lifting
- ▶ Hydraulic extendable crawlers
- ▶ Emergency button at bucket and ground
- ▶ Emergency descending battery power pack
- ▶ One joystick movement available in the bucket
- ▶ Outriggers manual leveling, automatically as optional
- ▶ Fully hydraulic control for arms
- ▶ Made of high tensile steel, hot dip galvanized boom available
- ▶ Hydraulically arms and outrigger interlock
- ▶ Radio control for the traction (outriggers as optional)
- ▶ Basket elevation 500mm/19.6" as optional
- ▶ Hydraulic tool outlet in the bucket as optional
- ▶ Reach standard of ANSI 92.2