

Spider X26


GX85





Spider X26 (GX85)

Standard Parameters

Model	X259	GX85
Max. work height	26m	85'
Max. platform height	24m	79'
Load capacity	200kg	441lb
Lateral Outreach	14.0m at 80kg 11.2m at 200kg	46' at 176lb 36.7' at 440lb
Basket rotation	±90°	
Jib rotation	120°	
Turntable rotation	360° non continuous	
Size of platform	1.2*0.8*1.1m	47" x 31" x 43"
Overall stowed length(w/t,with basket)	5.93/ 6.7m	233.5" / 264"
Overall stowed width (w/t,with basket)	0.89m/1.20m	35.1"/47.3"
Overall stowed height	1.96m	77.2"
Outrigger support size (wide)	5.13m x 4.25m	202" / 167.3"
Outrigger support size (narrow)	2.73m x 6.5m	107.5" / 256"
Total weight	3890 kg	8,576 lb
Driving speed	km/h	0-2.1
Max. work slope	20%	
Max. climbing ability	30%	
Dual Power sources : 230vV(110V) AC +	Diesel engine 18.5Kw	

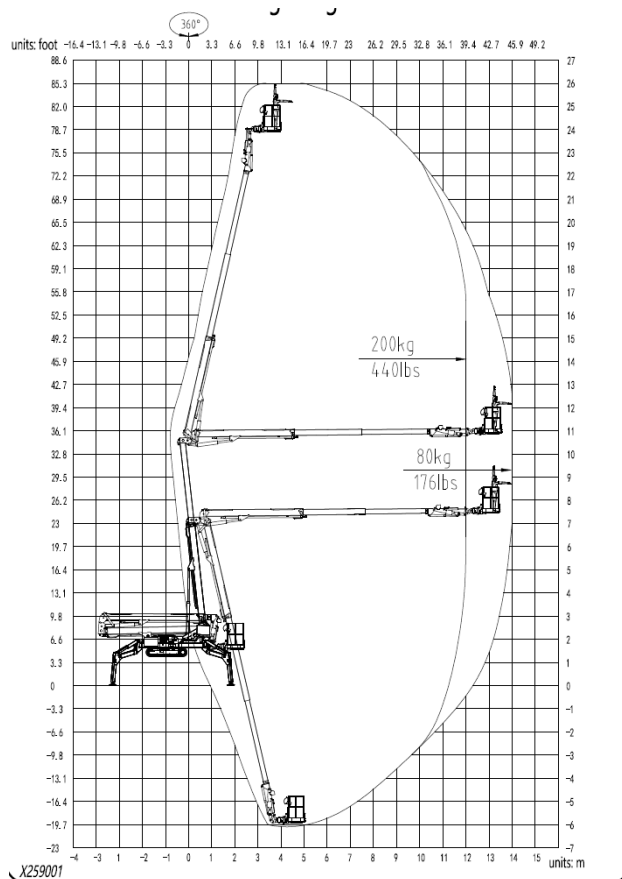

Technical dimension

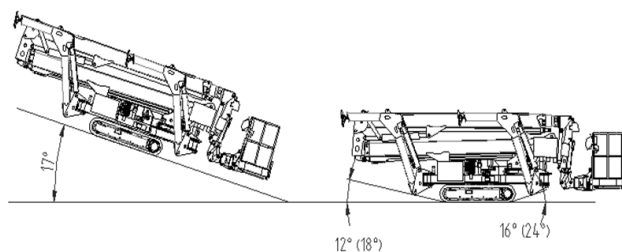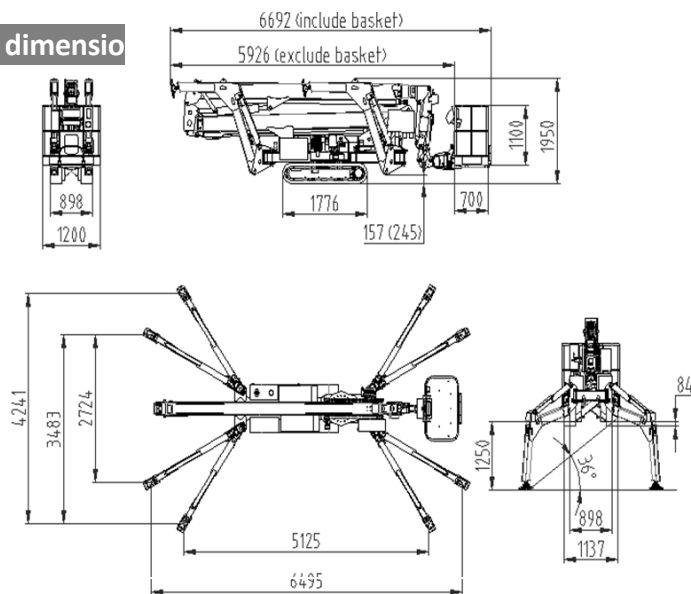

Standard Features

- ▶ Compact design; German made IFM controller with HMI
- ▶ Hydraulic extendable crawlers for the adjusting height and width
- ▶ Electric emergency lowering
- ▶ Auto-leveling basket and outriggers
- ▶ Radio control for all movement
- ▶ 360°non-continuous turntable rotation
- ▶ Hydraulically arms and outrigger interlocks
- ▶ Redundant load sensor, detachable basket
- ▶ 230v(110v 60Hz) 50Hz 16A outlet in the work platform
- ▶ Cylinder cover and winch available option
- ▶ Reach standards of ISO, CE ANSI

