



DUMP TRAILERS

14'-16' BUMPER HITCH & GOOSENECK

WWW.GECIMFG.COM

402-371-1400

SALES@APACHEEQUIPMENT.COM


HDGN16



STANDARD FEATURES

- 7 GAUGE FLOOR & 10 GAUGE SIDES
- 6" X 3" X 1/4" TUBE FRAME
- 3 WAY KTI PUMP, POWER UP / POWER DOWN / GRAVITY DOWN
- BRIDON LOAD CONTROL
- 12,000 LB JACK HEAVY-DUTY SPRING RETURN
- RUBBER MOUNTED DOT COMPLIANT LED LIGHTING
- FULL HEIGHT SIDE WALL BRACES
- STAKE POCKETS AND TIE DOWN RAILS
- 5 - 6,000 LB D-RINGS
- PALLET FORK STORAGE
- 7' X 20' ROLL UP MESH TARP
- TARP STORAGE PROTECTION
- SPARE TIRE & MOUNT
- 3,000 PSI SCISSOR HOIST, 52° DUMP ANGLE
- HEAVY-DUTY DIAMOND TREAD FENDER
- COMBINATION BARN DOOR / SPREADER GATE
- ADJUSTABLE HEIGHT 2 5/16" COUPLER
- SLIP RESISTANT STEPS ALL FOUR CORNERS
- 12V DEEP CYCLE BATTERY AND CHARGER
- 2 POSITION RAMP STORAGE

HD14

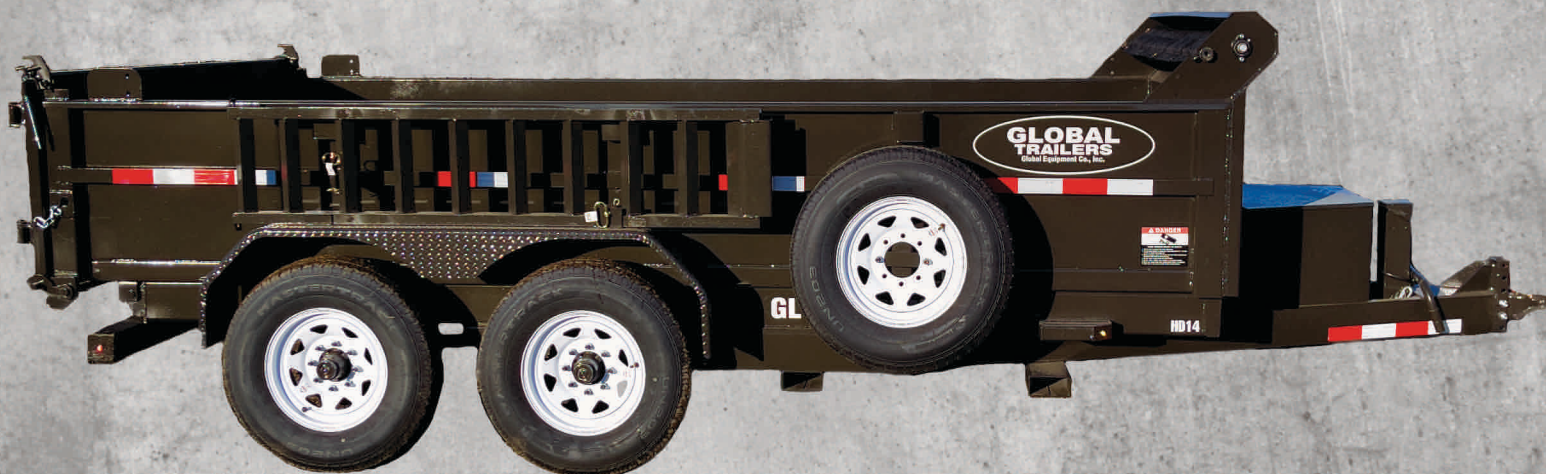

HDGN14

**52°
DUMP
ANGLE**



HD16

| Heavy Duty | HD14 Bumper | HDGN14 Gooseneck | HD16 Bumper | HDGN16 Gooseneck |
|---------------------|---|---|---|---|
| GVWR (lbs) | 14,000 (lbs) | 14,000 (lbs) | 14,000 (lbs) | 14,000 (lbs) |
| GAWR (lbs/Axle) | 7,000 (lbs) | 7,000 (lbs) | 7,000 (lbs) | 7,000 (lbs) |
| Inside Length Ft/In | 14'/168" | 14'/168" | 16'/192" | 16'/192" |
| Over All Length | 19' | 23' | 21' | 25' |
| Width Ft/In | 6.8'/82" | 6.8'/82" | 6.8'/82" | 6.8'/82" |
| Curb Weight | 4,300 (lbs) | 5,300 (lbs) | 4,600 (lbs) | 5,500 (lbs) |
| Payload | 9,700 (lbs) | 8,700 (lbs) | 9,400 (lbs) | 8,500 (lbs) |
| Lift System | PH520 5" Cylinder | PH520 5" Cylinder | PH520 5" Cylinder | PH520 5" Cylinder |
| Tire | 10 ply 16" Load Range E ST235/80R16 | 10 ply 16" Load Range E ST235/80R16 | 10 ply 16" Load Range E ST235/80R16 | 10 ply 16" Load Range E ST235/80R16 |

| Extra Heavy Duty | XHD14 Bumper | XHDGN14 Gooseneck | XHD16 Bumper | XHDGN16 Gooseneck |
|---------------------|---|---|---|---|
| GVWR (lbs) | 16,000 (lbs) | 16,000 (lbs) | 16,000 (lbs) | 16,000 (lbs) |
| GAWR (lbs/Axle) | 8,000 (lbs) | 8,000 (lbs) | 8,000 (lbs) | 8,000 (lbs) |
| Inside Length Ft/In | 14'/168" | 14'/168" | 16'/192" | 16'/192" |
| Over All Length | 19' | 23' | 21' | 25' |
| Width Ft/In | 6.8'/82" | 6.8'/82" | 6.8'/82" | 6.8'/82" |
| Curb Weight | 4,700 (lbs) | 5,700 (lbs) | 5,000 (lbs) | 5,900 (lbs) |
| Payload | 11,300 (lbs) | 10,300 (lbs) | 11,000 (lbs) | 10,100 (lbs) |
| Lift System | PH620 6" Cylinder | PH620 6" Cylinder | PH620 6" Cylinder | PH620 6" Cylinder |
| Tire | 14 ply 16" Load Range F ST235/85R16 | 14 ply 16" Load Range F ST235/85R16 | 14 ply 16" Load Range F ST235/85R16 | 14 ply 16" Load Range F ST235/85R16 |

Popular Options

- 3' High side & front
- 4' High side & front
- Under bed basket

OTS
Omaha Trailer Sales
402-334-8232
www.omahatrailersales.com



Made in USA

GLOBAL EQUIPMENT COMPANY, INC/APACHE PALCO/HENKE BUFFALO RESERVES THE RIGHT TO MAKE CHANGES IN ENGINEERING, DESIGN AND SPECIFICATIONS; ADD IMPROVEMENTS; OR DISCONTINUE MANUFACTURING AT ANY TIME WITHOUT NOTICE OF OBLIGATION. COPYRIGHT © 2019 GECI. ALL RIGHTS RESERVED

VR 2.1 01/20/22