



Lightbox 90

Curved LED frame

- NF-04905 / NF-04900
- NF-21905 / NF-21900
- NF-56905 / NF-56900
- Any colour possible

Specifications

- ↔ 90 mm
- 📦 1.895 kilos/meter
- ↗ 6150 mm
- 💡 Illuminated
- ✓ Two-year warranty

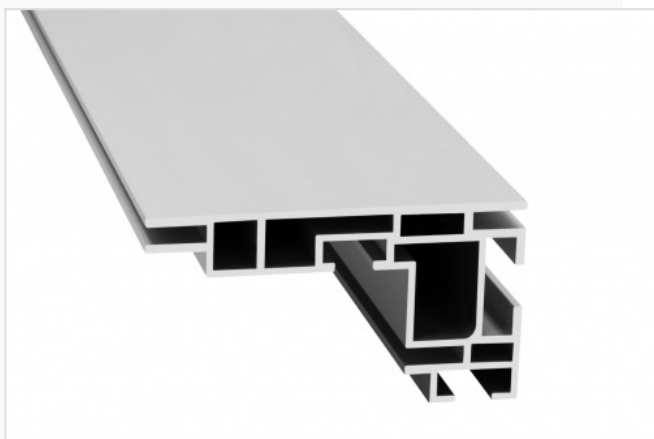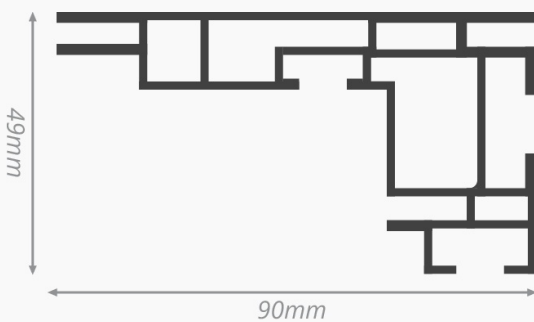

About the Lightbox 90 (curved)

Single-sided curved profile for illuminating textile prints. The backlit illumination ensures an even distribution of light. The LED is mounted on the inside of the frame. For better light reflection, a blackout fabric can be attached to the back of the frame.

The advantages

- ✓ Single-sided curved LED frame
- ✓ Available as a cylinder and curved frame
- ✓ Wall mounted or freestanding
- ✓ LED technology: LED on Stabilizer
- ✓ Two-year warranty



Mounting



Wall-mounted


Wall mounted frames with just one textile.



Freestanding

Freestanding frame with a textile on both sides.

Finish

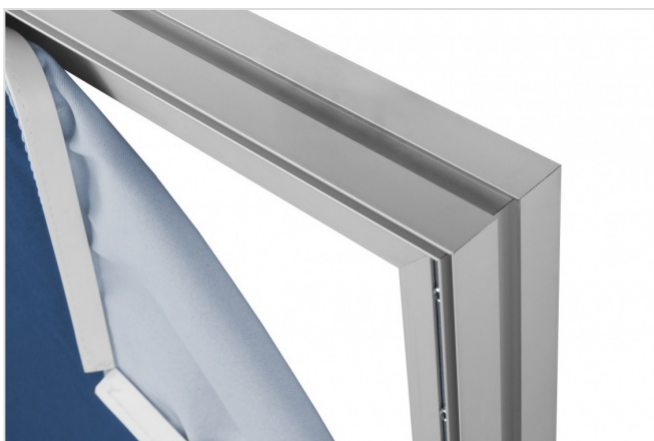

Open


The outer groove facilitates the usage of accessories.



Closed


An even finish. If desired, holes can be drilled in the profile so that accessories can be attached.

Shapes

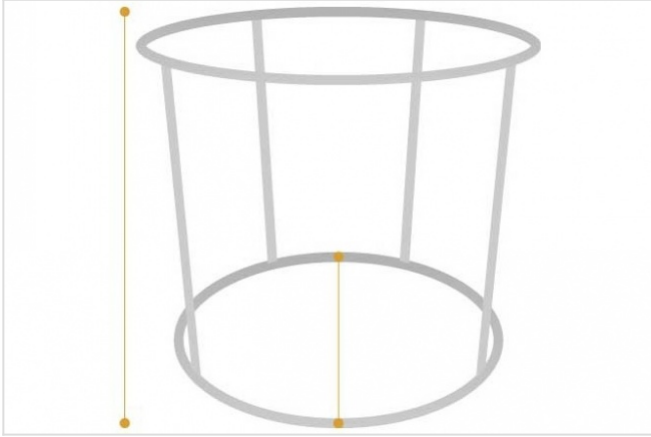

Cylinder

The advantage of a cylinder is that it is visible from all sides.

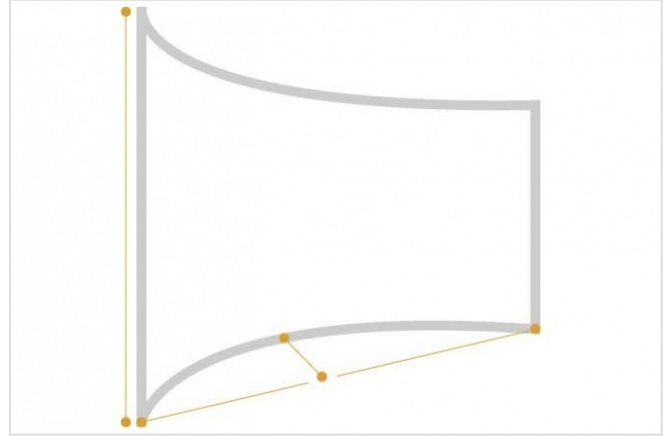

Curved

Ideal as an impressive backdrop at trade fairs.

Illumination



LED on Stabilizer

- Even light distribution due to backlighting
- Suitable for small and large frames
- Compactly packed, economically transportable
- Relatively low power consumption

Brightness



Bright LED

- Most common brightness
- Even distribution of light
- Relatively low power consumption



Super Bright LED


- Distinctive and impressive luminosity
- Dimmable, DALI dimmable, and non-dimmable
- Suitable for ceiling lighting
- Suitable for single-coloured and white textiles

Lightcolour




3000K

Warm white.



4000K

Yellow white.



6500K

Bright white (daylight).

Dimmable



Dimmable

The brightness of the LED frame can be adjusted with a dimmer. This way, the light intensity can be determined depending on the environment.



DALI dimmable

The LED frame is prepared for a connection to a DALI system.

Dimmer



Dimmer

The LEDs have white colours. The three most commonly used colours are: warm white, yellow white and bright white.

Stabilizers



Stabilizers


In order to guarantee the stability of the frame, stabilizers must be placed in the frame. This way the construction is sturdy.

Recommended accessories

Baseplates




Baseplate simple
FK-0100



Baseplate slim
FK-0105



Baseplate slim refined
FK-0107




Baseplate heavy
FK-0110

Wall mounts




Wall mount heavy
FK-0410

Ceiling mounts



Ceiling mount
FK-0360

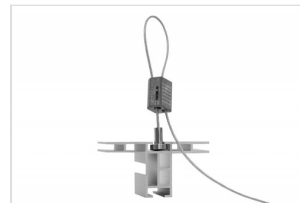

Suspension cable
FK-7900

Connectors



Frame connector alu
FK-0600



Frame connector 150 degrees
FK-0615



Frame connector 135 degrees
FK-0620



Frame connector 90 degrees
FK-0630

Locksets



Lockset heavy
FK-0200



Lockset heavy single plate
FK-0202



Lockset heavy short
FK-0205



Flexible lockset
FK-0430

Extension sets



Extension set heavy
FK-0500



Extension set aluminium keeper
FK-0532

Stabilizers



Stabilizer 43
NF-04438

Led-componenten



Powered 3LEDs
AF90-016



Powered 6LEDs
AF90-017



Powered 9LEDs
AF90-015



Powered 3LEDs
AF90-040

Led-strips



Powered 6LEDs
AF90-045



2.1W / 24V (47 cm)
AF90-035

Controllers



**LED controller
dimmer**
AF92-220

Drivers



**Led driver 24V/30W
with cable**
AF99-338-WC



**Led driver 24V/60W
bulk**
AF99-340-BP



Led driver 24V/60W
AF99-340



**Led driver 24V/60W
with cable**
AF99-340-WC