

# ApplianceStor 90R

Data Sheet



## High-Density VMS Storage Server

The AS90R integrates VMS and storage in a simple to use, high-performance video surveillance storage solution. It is optimized for Video Surveillance applications and delivers the performance required for the most demanding megapixel installations.

### Applications

- Medium to large video surveillance locations

### Features:

- **1x Intel Xeon E3 CPU**
- **Up to 64GB DDR4 DIMM RAM**

**Powerful** server and storage system, built around the high-performance Intel® Xeon® processor.

**Purpose-built** open platform to integrate Video Management Software, and Video Analytic Software Providers. All major supported Video Analytic Software providers are prequalified. More are continually added to ensure the widest possible certification coverage.

**Effortless installation**, management and administration along with advance RAID

Rasiliant provides a **complete physical security solution**. All necessary components are offered, including high-performance recording, viewing/monitoring and administration servers, and high-performance storage.



### For more information contact:

**Tel:** +1 (408) 730-2568 | **Toll Free** +1 (888) 902-8981 | **Website:** [www.rasiliant.com](http://www.rasiliant.com)  
**Sales:** [sales@rasiliant.com](mailto:sales@rasiliant.com) | **Technical Support:** [techsupport@rasiliant.com](mailto:techsupport@rasiliant.com)

Copyright © 2020 Rasiliant Systems Inc. Specifications are subject to change without notice.


# ApplianceStor 90R

Data Sheet



## Specifications

<b>CPU</b>	Intel Xeon E3-1230v5
<b>Memory</b>	Up to 64GB DDR4 RDIMM
<b>Display Output</b>	HD 7750 1 GB DDR3 mDP, 2x HDMI (DVI and VGA via adapters).
<b>Storage</b>	12x 3.5" SATA III HDD in RAID 0, 1, 5, 6, or 10 2x 240, 480, or 960 GB SSD for OS
<b>Networking</b>	4x GbE
<b>Management Port</b>	1x GbE
<b>Input/Output</b>	1x Serial Port, 3x USB 3.0 (2x Rear, 1x Front). 2x USB 2.0, 1x VGA, 1x PS/2 combined keyboard & mouse port
<b>Dimensions (WxHxD)</b>	19" x 3.5" x 25.4" / 483 x 89 x 645 mm
<b>Weight</b>	Max 60 lbs/28 kg
<b>Power</b>	2x 100/240V AC
<b>Watts</b>	800 80PLUS Gold
<b>Operating Temperature</b>	10°C - 35°C

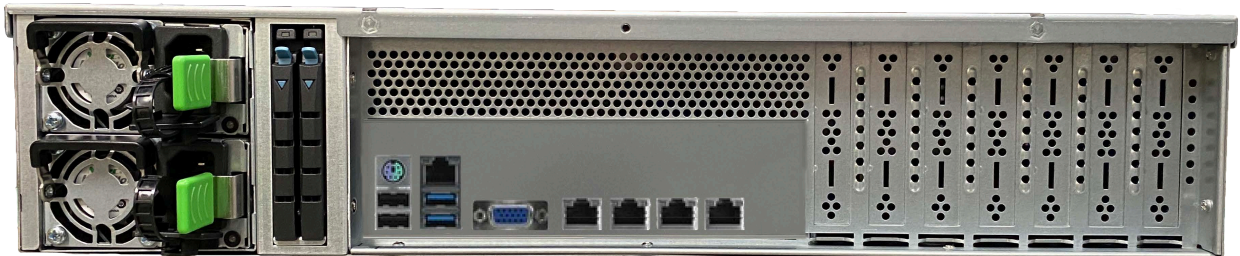

## For more information contact:

**Tel:** +1 (408) 730-2568 | **Toll Free** +1 (888) 902-8981 | **Website:** [www.rasilient.com](http://www.rasilient.com)

**Sales:** [sales@rasilient.com](mailto:sales@rasilient.com) | **Technical Support:** [techsupport@rasilient.com](mailto:techsupport@rasilient.com)

Copyright © 2020 Rasilient Systems Inc. Specifications are subject to change without notice.

Rev 2.2 04/20/2020