


SPS-100 ***PLUNGER SENSOR***

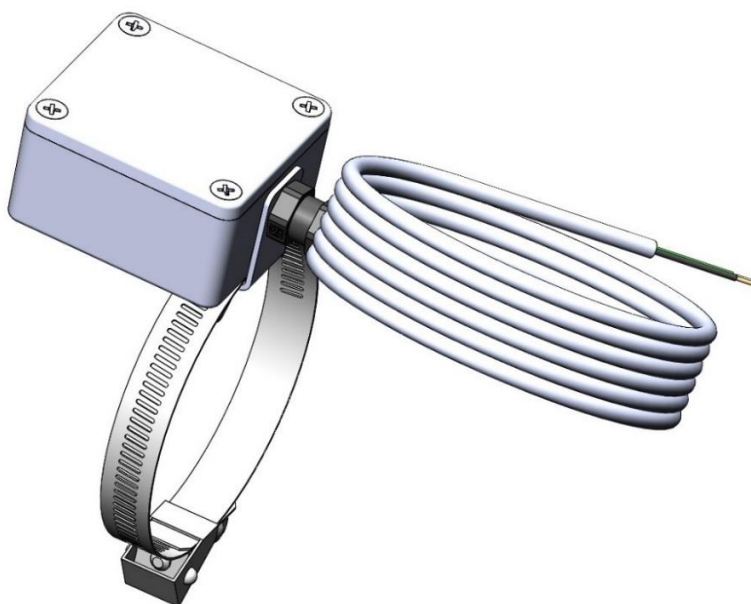

Systec's plunger sensor, the ***SPS-100***, provides state of the art plunger sensing utilizing a 3-D magnetometer and accelerometer.

The ***SPS-100*** offers the following features:

- Magnetic Only sensing
- Combined Magnetic + Vibration sensing
- Adjustable sensitivity
- Adjustable output pulse width

The sensor comes standard with an aluminum enclosure, hose clamp, and 10 feet of cable.


Other options include:

- Explosion Proof enclosure
- ½" cable gland for conduit connection
- Two-wire battery configuration


Supply Voltage	6-28 Vdc
Operating Current	< 1 mA
Output Signal Current Sink	0.750 A
Operating Temperature	-40 to +70° C

Part Number, standard	2325000-50
P/N Explosion Proof	2325000-75
P/N ½" Conduit	2325000-25
P/N 2-Wire	2407000-00

DATASHEET

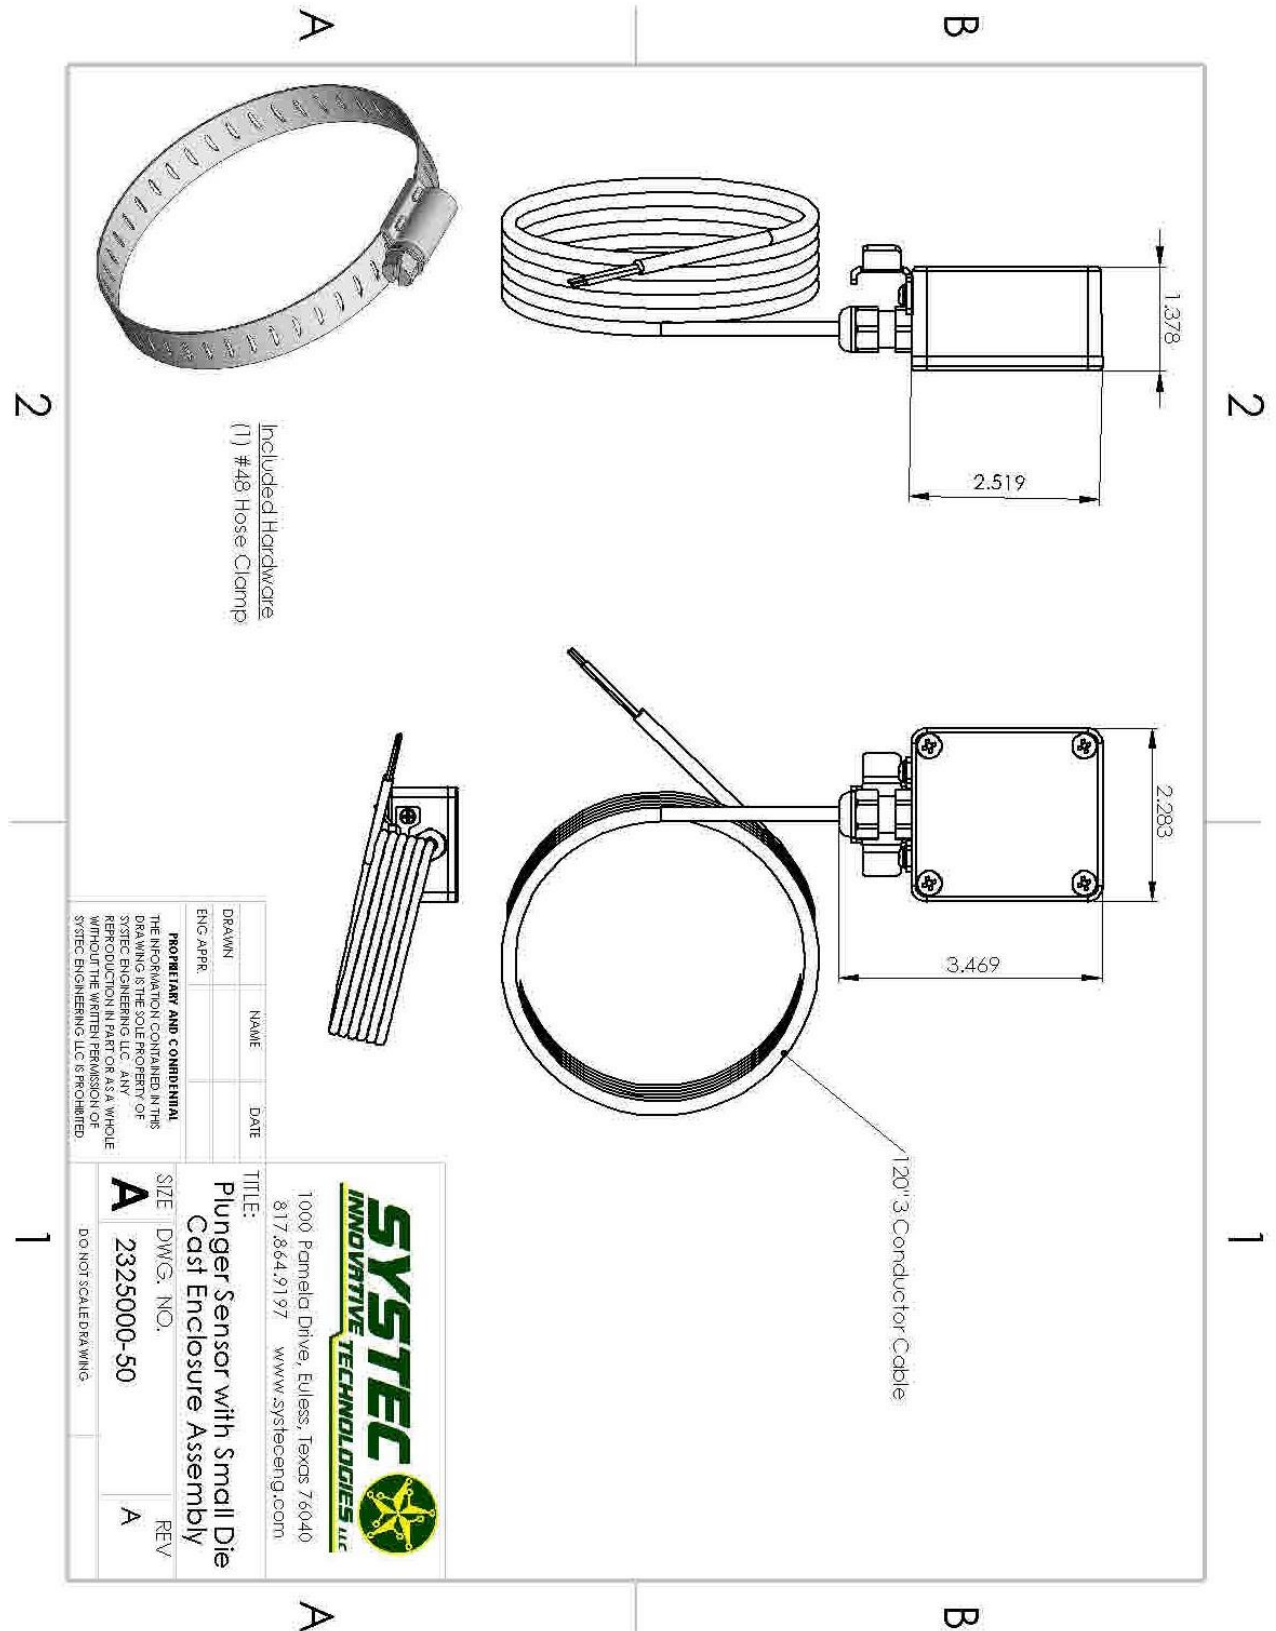

DATASHEET

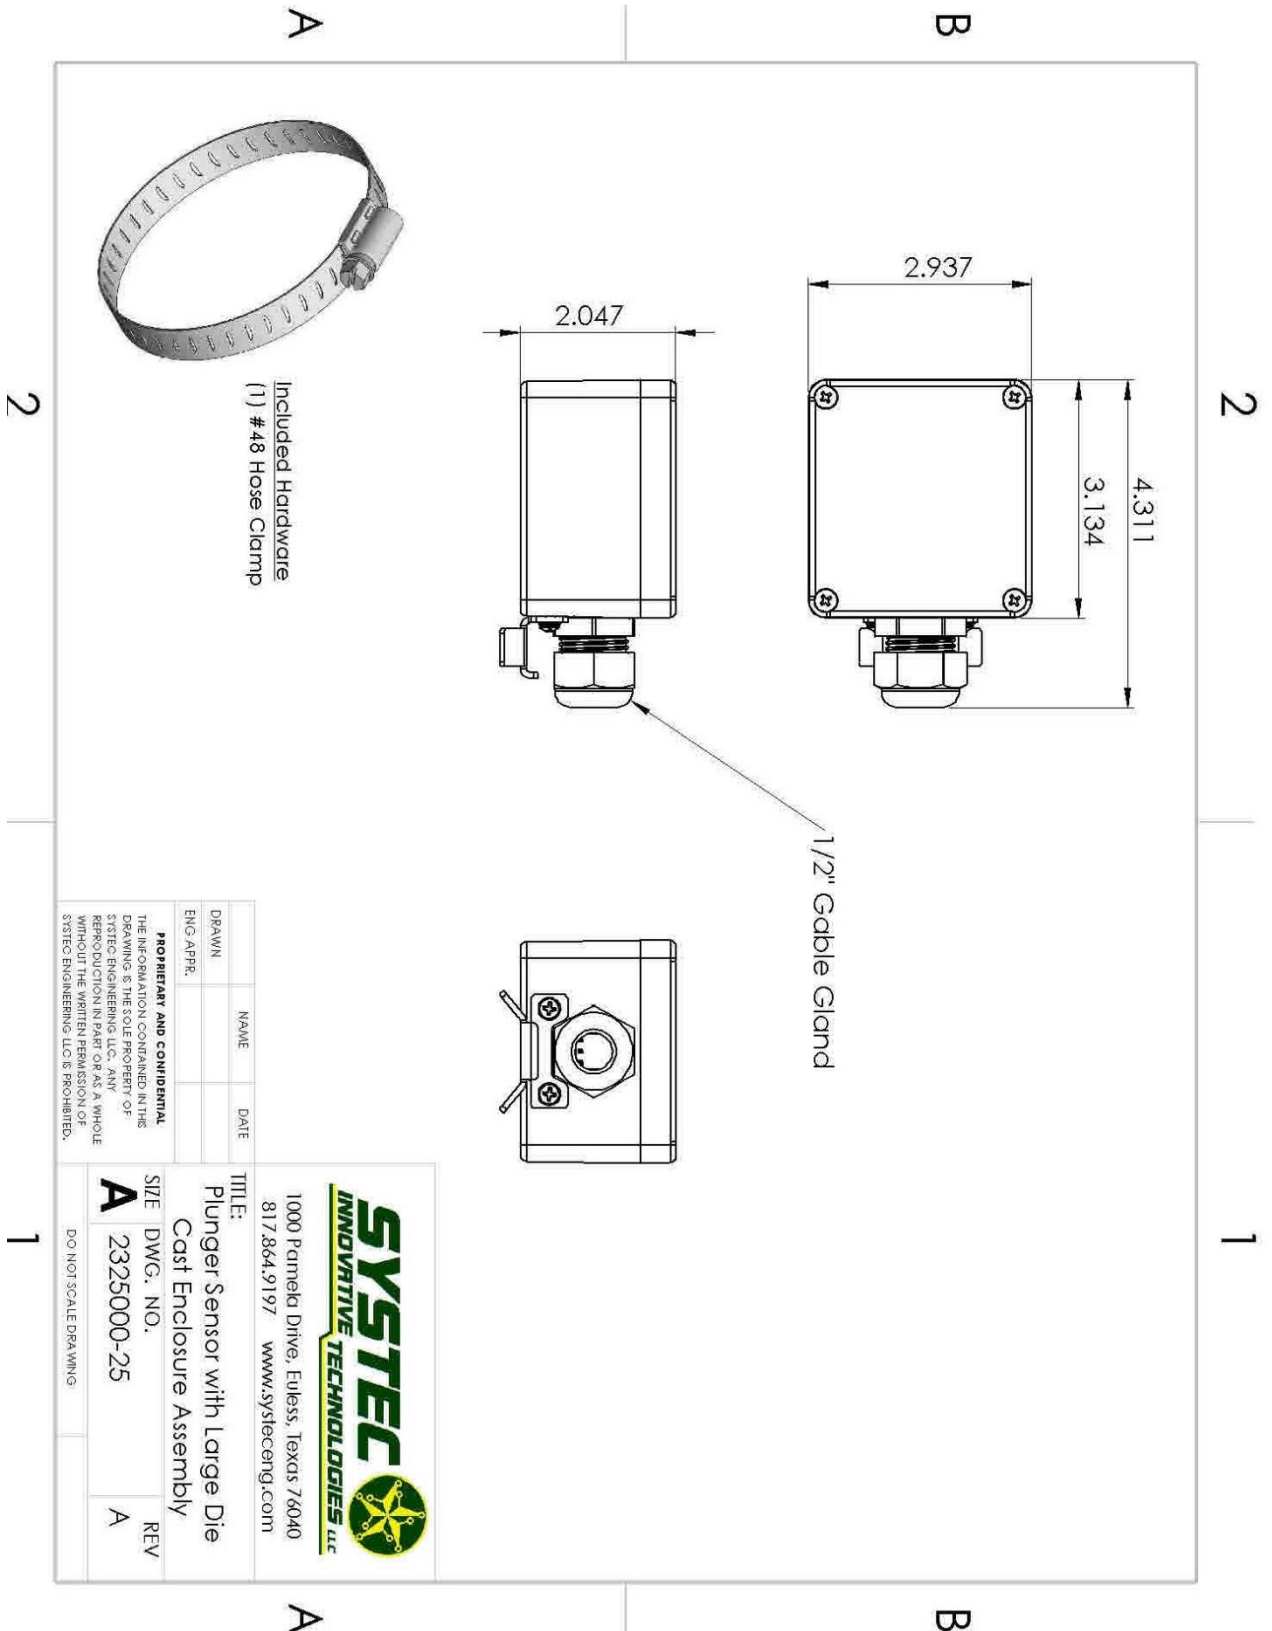

DATASHEET

