




PVC SCHEDULE 40

Solvent Weld

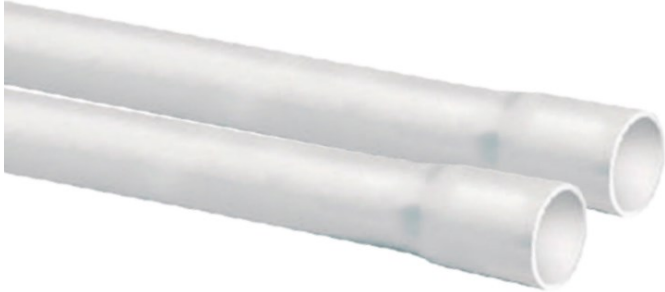


Specification: ASTM D1785, ASTM D2668
NSF/ANSI/CAN 61 & NSF/ANSI 372 Available

Compound: ASTM D1784 Cell Classification 12454

White in color, available in nominal laying lengths of 10 feet and 20 feet. Pipe ends can be produced with bell end or plain end. Pipe is manufactured in a certified ISO 9001:2015 facility using PVC resin manufactured in the US without the use of plasticizers.

PIPE SIZE	AVERAGE O.D.	NOM I.D.	MIN WALL (T)	PRESSURE RATING (PSI)	PIPE STIFFNESS (PSI)
0.5	0.840	0.609	0.109	600	5,928
0.75	1.050	0.810	0.113	480	3,136
1	1.315	1.033	0.133	450	2,574
1.25	1.660	1.363	0.410	370	1,397
1.5	1.900	1.593	0.145	330	1,008
2	2.375	2.049	0.154	280	596
2.5	2.875	2.445	0.203	300	784
3	3.500	3.042	0.216	260	509
4	4.500	3.998	0.237	220	307
6	6.625	6.031	0.280	180	154
8	8.625	7.972	0.322	160	104
10	10.750	9.976	0.365	140	78
12	12.750	11.889	0.406	130	64

* All sizes in inches

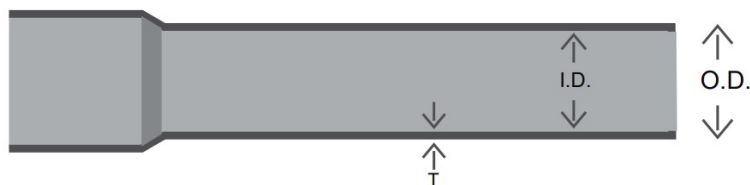

Supplylinesales.com



contact@supplylinesales.com

Supply Line Sales, LLC
P.O. BOX 778026
Henderson, NV 89077