



PVC Sewer & Drain Solvent Weld




Specification: ASTM D3034 / ASTM D2729

Compound: ASTM D1784 Cell Classification 12454

White in color, available in nominal laying lengths of 10 feet and 20 feet bell end. Only available solid without perforation. Pipe is manufactured in a certified ISO 9001:2015 facility using PVC resin manufactured in the US without the use of plasticizers.

PIPE SIZE	AVERAGE O.D.	NOM I.D.	MIN WALL (T)	PIPE STIFFNESS	NOM I.D.	MIN WALL (T)	PIPE STIFFNESS
		D3034			D2729		
3	3.250	3.064	0.093	46	3.102	0.465	19
4	4.215	3.961	0.12	46	4.056	0.648	0.648
6	6.275	5.893	0.18	46.000	6.063	0.100	0.100

* All sizes in inches

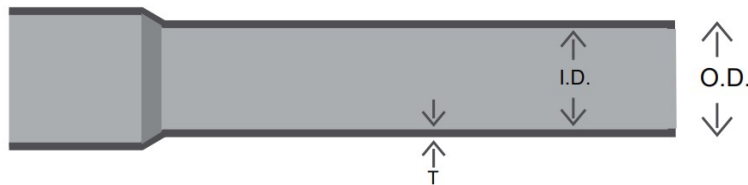

Supplylinesales.com



contact@supplylinesales.com

Supply Line Sales, LLC
P.O. BOX 778026
Henderson, NV 89077