



# PVC SDR 13.5 - 41 Solvent Weld




**Specification:** ASTM D2241

**Compound:** ASTM D1784 Cell Classification 12454

White in color, available in nominal laying lengths of 10 feet and 20 feet. Pipe ends can be produced with bell end or plain end. Pipe is manufactured in a certified ISO 9001:2015 facility using PVC resin manufactured in the US without the use of plasticizers.

PIPE SIZE	AVERAGE O.D.	NOM I.D.	MIN WALL (T)	NOM I.D.	MIN WALL (T)	NOM I.D.	MIN WALL (T)	NOM I.D.	MIN WALL (T)	NOM I.D.	MIN WALL (T)
		PRESSURE CLASS 315 PIPE STIFFNESS: 916 PSI		PRESSURE CLASS 200 PIPE STIFFNESS: 224 PSI		PRESSURE CLASS 160 PIPE STIFFNESS 115 PSI		PRESSURE CLASS 125 PIPE STIFFNESS 57 PSI		PRESSURE CLASS 100 PIPE STIFFNESS 28 PSI	
0.5	0.840	0.709	0.062	-	-	-	-	-	-	-	-
0.75	1.050	0.885	0.078	0.923	0.060	-	-	-	-	-	-
1	1.315	1.109	0.097	1.181	0.063	-	-	-	-	-	-
1.25	1.660	1.399	0.123	1.493	0.079	1.524	0.064	1.533	0.060	-	-
1.5	1.900	1.601	0.141	1.709	0.090	1.745	0.073	1.773	0.060	-	-
2	2.375	2.002	0.176	2.135	0.113	2.182	0.091	2.220	0.073	-	-
2.5	2.875	2.423	0.213	2.585	0.137	2.462	0.110	2.688	0.088	-	-
3	3.500	2.951	0.259	3.146	0.167	3.214	0.135	3.271	0.108	3.320	0.850
4	4.500	-	-	-	-	4.133	0.173	4.207	0.138	4.267	0.110
6	6.625	-	-	-	-	-	-	6.193	0.204	6.282	0.162
8	8.625	-	-	-	-	-	-	8.063	0.265	8.180	0.210
10	10.75	-	-	-	-	-	-	10.480	0.331	10.195	0.262
12	12.75	-	-	-	-	-	-	11.919	0.392	12.091	0.311

\* All sizes in inches

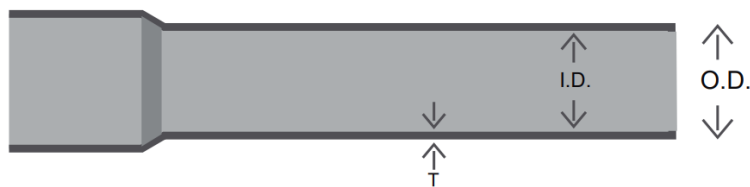

Supplylinesales.com



contact@supplylinesales.com

Supply Line Sales, LLC  
P.O. BOX 778026  
Henderson, NV 89077