CONTENTS

SAFETY INSTRUCTIONS	1
PRODUCT SPECIFICATIONS	2
PRODUCT FEATURES	3
PRODUCT DESCRIPTION	4
OPERATION INSTRUCTIONS	5
SUGGESTED INFLATION AIR PRESSURE	6
PRODUCT WARRANTY	7

SAFETY INSTRUCTIONS

2. Keep the product out of reach of children. It is recommend to use by users over 16 years old. 3. The product has built-in Li-ion battery, please don't throw it in the fire or discard it casually, or it may cause fire or explosion.

4.Do not use the product for applications outside of its intended use.

5.Do not disassemble and assemble this product without permission.

6.Do not expose the product to rain or water of any kind. 7.Do not store the product in high temperature or humid environments.

8.Do not use the product near flammable liquids or in gaseous or explosive atmospheres.

9. Keep the product dry, clean, and free from oil and grease. Please use dry cloth to clean it. 10.If the product is not used for a long time, please charge it at least once every 6 months. 11. The product and its inflation tube will heat up after long time of continuous use, please don't

touch the inflation tube to avoid scaling after finish the inflation. 12.Please choose correct Unit before preset pressure, or it may cause tire burst. Please refer to

the common Unit conversion: 1bar=14.5psi, 1bar=100kpa, 1bar=1.02kg/cm².

PRODUCT SPECIFICATIONS

Product Name	Cordless Tire Inflator
Model No	TC15
USB Type	Type-C
Input Voltage	5V/2A 9V/2A
Charging Time	5-6H (5V/2A) / 2~3H (9V/2A)
USB Output Voltage	5V/2.4A (12W)
Pressure Measured Range	3~150PSI 150PSI Max
4 Optional Units	PSI, BAR, KPA, KG/CM ²
4 Working Modes	Cars, Motorcycles, Bikes, Balls
3 Light Modes	Flashlight, Blinking Mode, SOS

PRODUCT FEATURES

1.LCD Pressure Display: The product can clearly display the measured pressure (over 3PSI) and the preset pressure. The real-time pressure changes in the screen during inflation so that you can monitor the tire pressure at all times.

2.Intelligent Control: If the real-time tire pressure is higher than your preset tire pressure, the product will not work. The product will stop inflating automatically when it reaches the preset

3.Low Battery Indicator: When the battery is low, the LCD screen will show LO to remind you to charge the product.

4.Auto Power Off: If the product is not used for over 90s±2s, it will auto power off. 5. High Temperature Protection: After continuous use of the product, if the temperature of its cylinder reaches 203°F, the product will stop inflating and the 🕻 📗 📗 in the screen will flash to remind. When the temperature drops to 185°F, the product will start to inflate again. 6.Battery Protection: Built-in with 4 upgraded protections, including over-charge/

convenient for you to use next time.


PRODUCT DESCRIPTION

1.Product Details



2.Screen Display



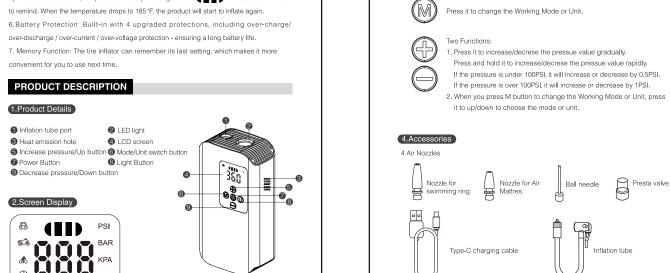

4 Working modes and its default pressure

Working Mode 🖨 🕏 🔊

Hold it for 2S to power on/off the tire inflator.

After power on the tire inflator, press it to start/s

After power on the tire inflator, press it to start/stop inflating.

Hold it for 2S to turn on/off the LED light.

After turn on the LED light, press it to change the light mode in order. Hold it for 2S to turn on/off the LED light.



1.Preset Tire Pressue

①If you don't need to change the default Working mode and Unit, just press \varTheta to preset your

desired pressure value.

②If you need to change the Working mode or Unit, firstly, press (M), the (5) will flash, then press (4) again, the PSI will flash, then press to choose the Unit you need. Wait until no icon flash, press



to preset your desired pressure value. (Note: After you preset the desired pressure, the screen will show back

3 Working mode Pressure display

BAR KPA

2.How to Inflate Tires

① Hold **(b)** for 2S to power on the tire inflator.


② Connect the inflation tube to the tire valve. 3 Preset your desired pressure as the steps in part 1 Preset Tire Pressure.


4 Press to start the tire inflator to inflate, wait until it automatically stop when it reaches the preset pressure. Then hold 🚳 for 2S to power off the tire inflator. ⑤ Pull out the inflation tube from the tire valve.











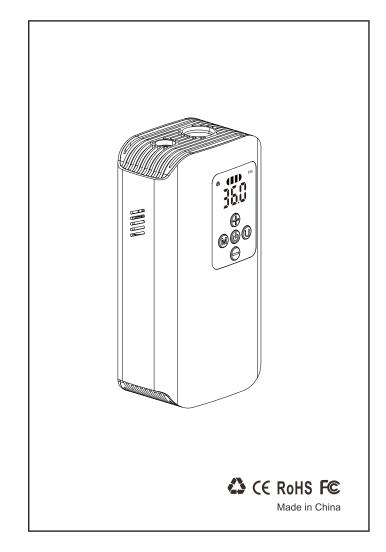

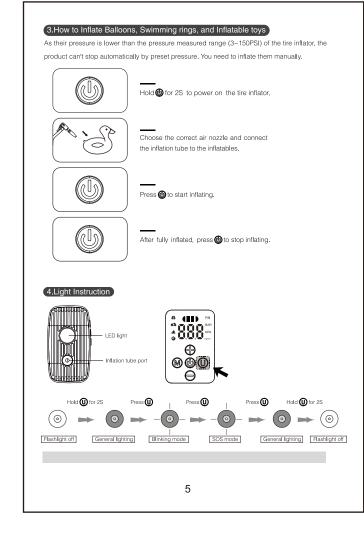



	12, 14, 16 inch bike tire	30~50PSI
	20, 22, 24 inch bike tire	40~50PSI
Bicycle	26, 27.5, 29 inch mountain bike tire	45~65PSI
	700C tubular road bike tire	120~145PSI
Motorcycle	Motorcycle tires	1.8~2.8BAR
Cars	Small cars tires	2.2~2.8BAR
Balls	Basket ball	7~9PSI
	Football	8~16PSI
	Volleyball	4~5PSI
	Rugby	12~14PSI

PRODUCT WARRANTY We offer a one-year warranty for our product. If you have any questions or product issues

during this period, please email to our official service team service@nulksen.com, we will reply and answer your questions within 24 hours.

If you just want to return our product, please contact Amazon directly within 30 days to return it. A full refund will be issued to you after you return our product in its original package with all

> **USER MANUAL** Please read this manual carefully before using the product and

keep it for future reference.