

Measurements of the $^{238}\text{U}/^{235}\text{U}$ and $^{239}\text{Pu}/^{235}\text{U}$ Fission Cross-Section Ratios Using Monoenergetic Neutron Beams

Jack Silano¹, Anthony Ramirez¹, Ron Malone¹, Anton P. Tonchev^{1,2}, Werner Tornow², Calvin R. Howell², Sean W. Finch², Matthew Gooden³

¹Lawrence Livermore National Laboratory, ²Duke University and TUNL, ³Los Alamos National Laboratory

Nov 18, 2024





LLNL-PRES-871483

This work was performed under the auspices of the U.S. Department of Energy by Lawrence Livermore National Laboratory under contract DE-AC52-07NA27344. Lawrence Livermore National Security, LLC

Motivation: Independent Verification of $^{238}\text{U}/^{235}\text{U}$ and $^{239}\text{Pu}/^{235}\text{U}$ Fission Cross-section Ratios



- Independently verify cross-section ratios observed by fissionTPC
- In particular, verify systematic deviations from ENDF/B-VIII.0 evaluation
 - Shape difference around 1.5 – 2 MeV in $^{238}\text{U}/^{235}\text{U}$
 - 2% systematic shift over broad energies in $^{239}\text{Pu}/^{235}\text{U}$

Casperson *et al.* PRC **97**, 034618 (2018).
Snyder *et al.* NDS 178, 1-40 (2021).
Dongwi *et al.* arXiv:2409.18279v1 (2024).

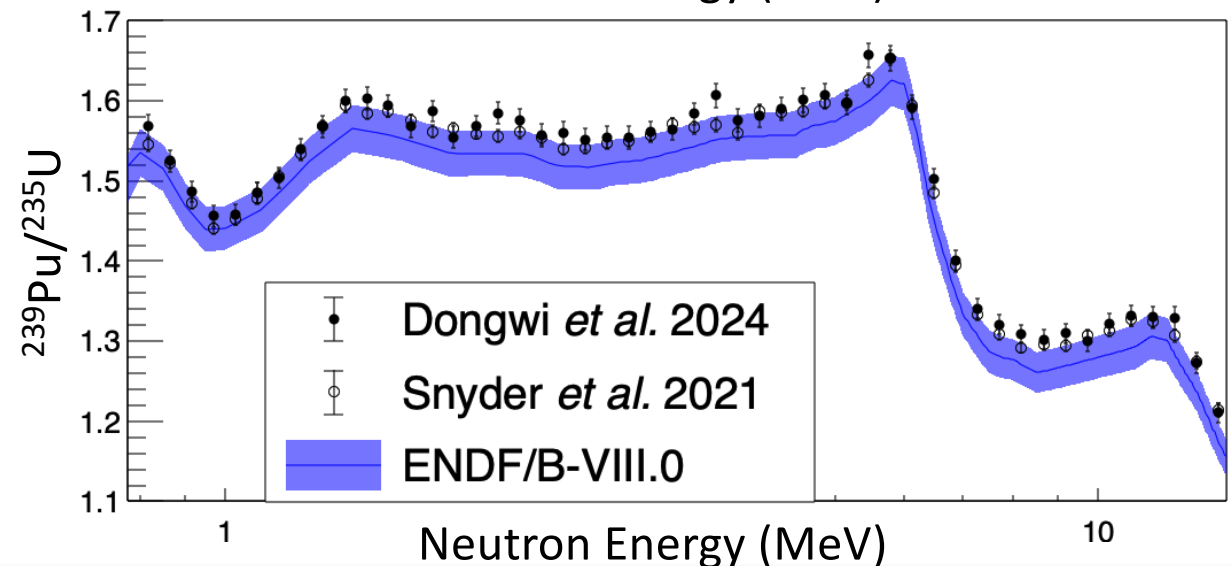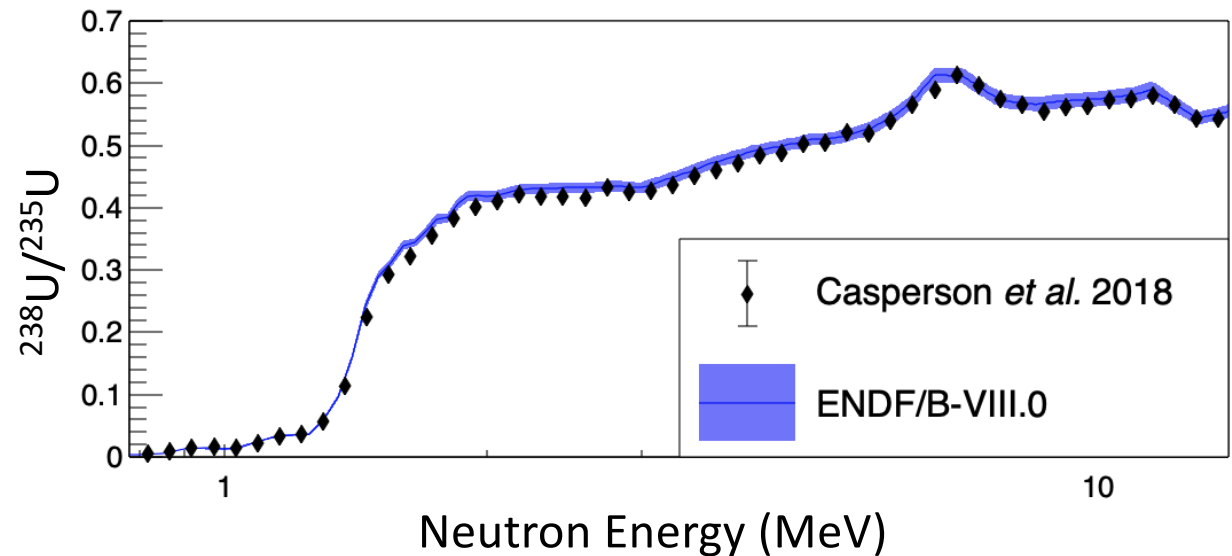


Fission Ratio Measurements at TUNL

- Monoenergetic and pulsed neutron beams from 10 MV FN Tandem Van de Graaff accelerator
- Large Time-of-Flight Room
 - Minimal room return
- Dual fission ionization chambers with simple geometry and signal analysis
- Leverage LLNL-LANL-TUNL fission product yield collaboration's years of expertise successfully fielding fission chambers in neutron beams

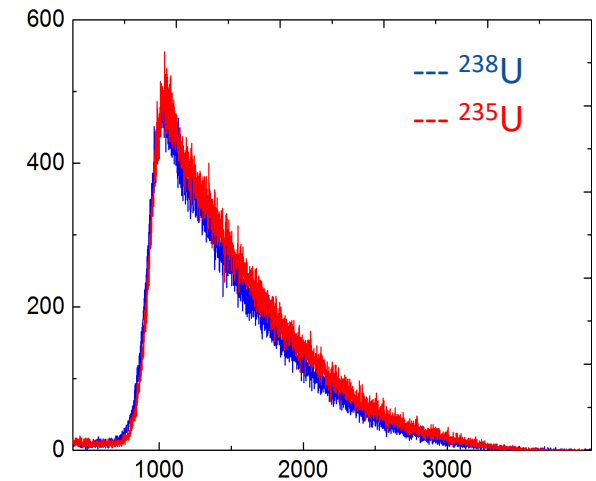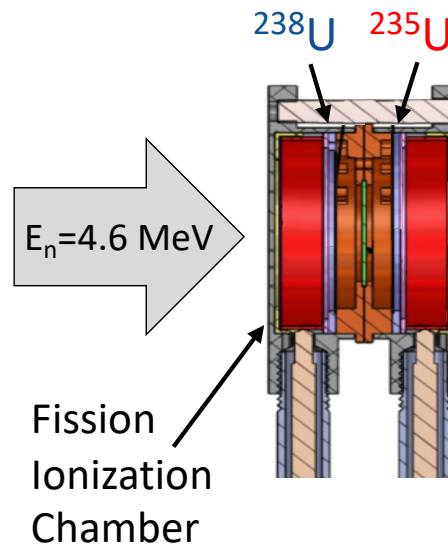


Experimental Setup in TUNL nTOF Room



- 400 ns pulsing period
 - ~ 2 ns FWHM
 - Neutron flux $\sim 5 \times 10^6$ n/s/cm²
- FC flip at halfway through measurement to correct for geometry effects
- Alignment monitored continuously by distance sensing laser
- Data collected from 2021-2023

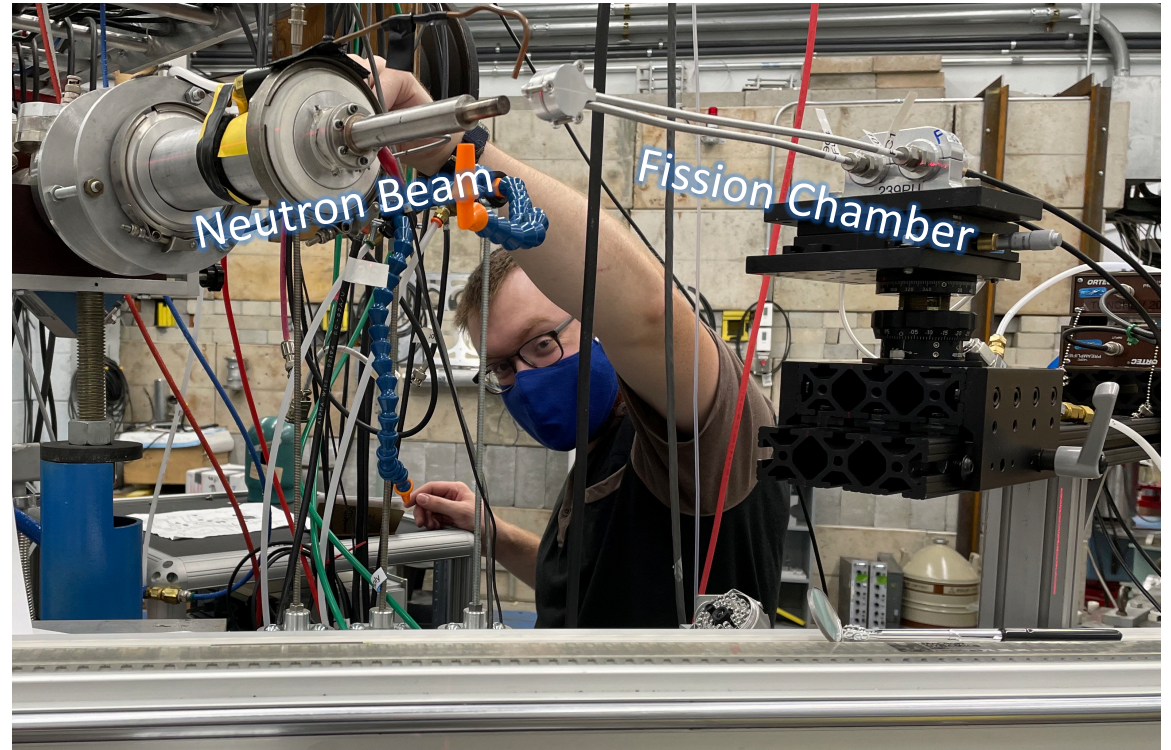



MCNP Calculations Confirm Limited Sensitivity to FC Rotation

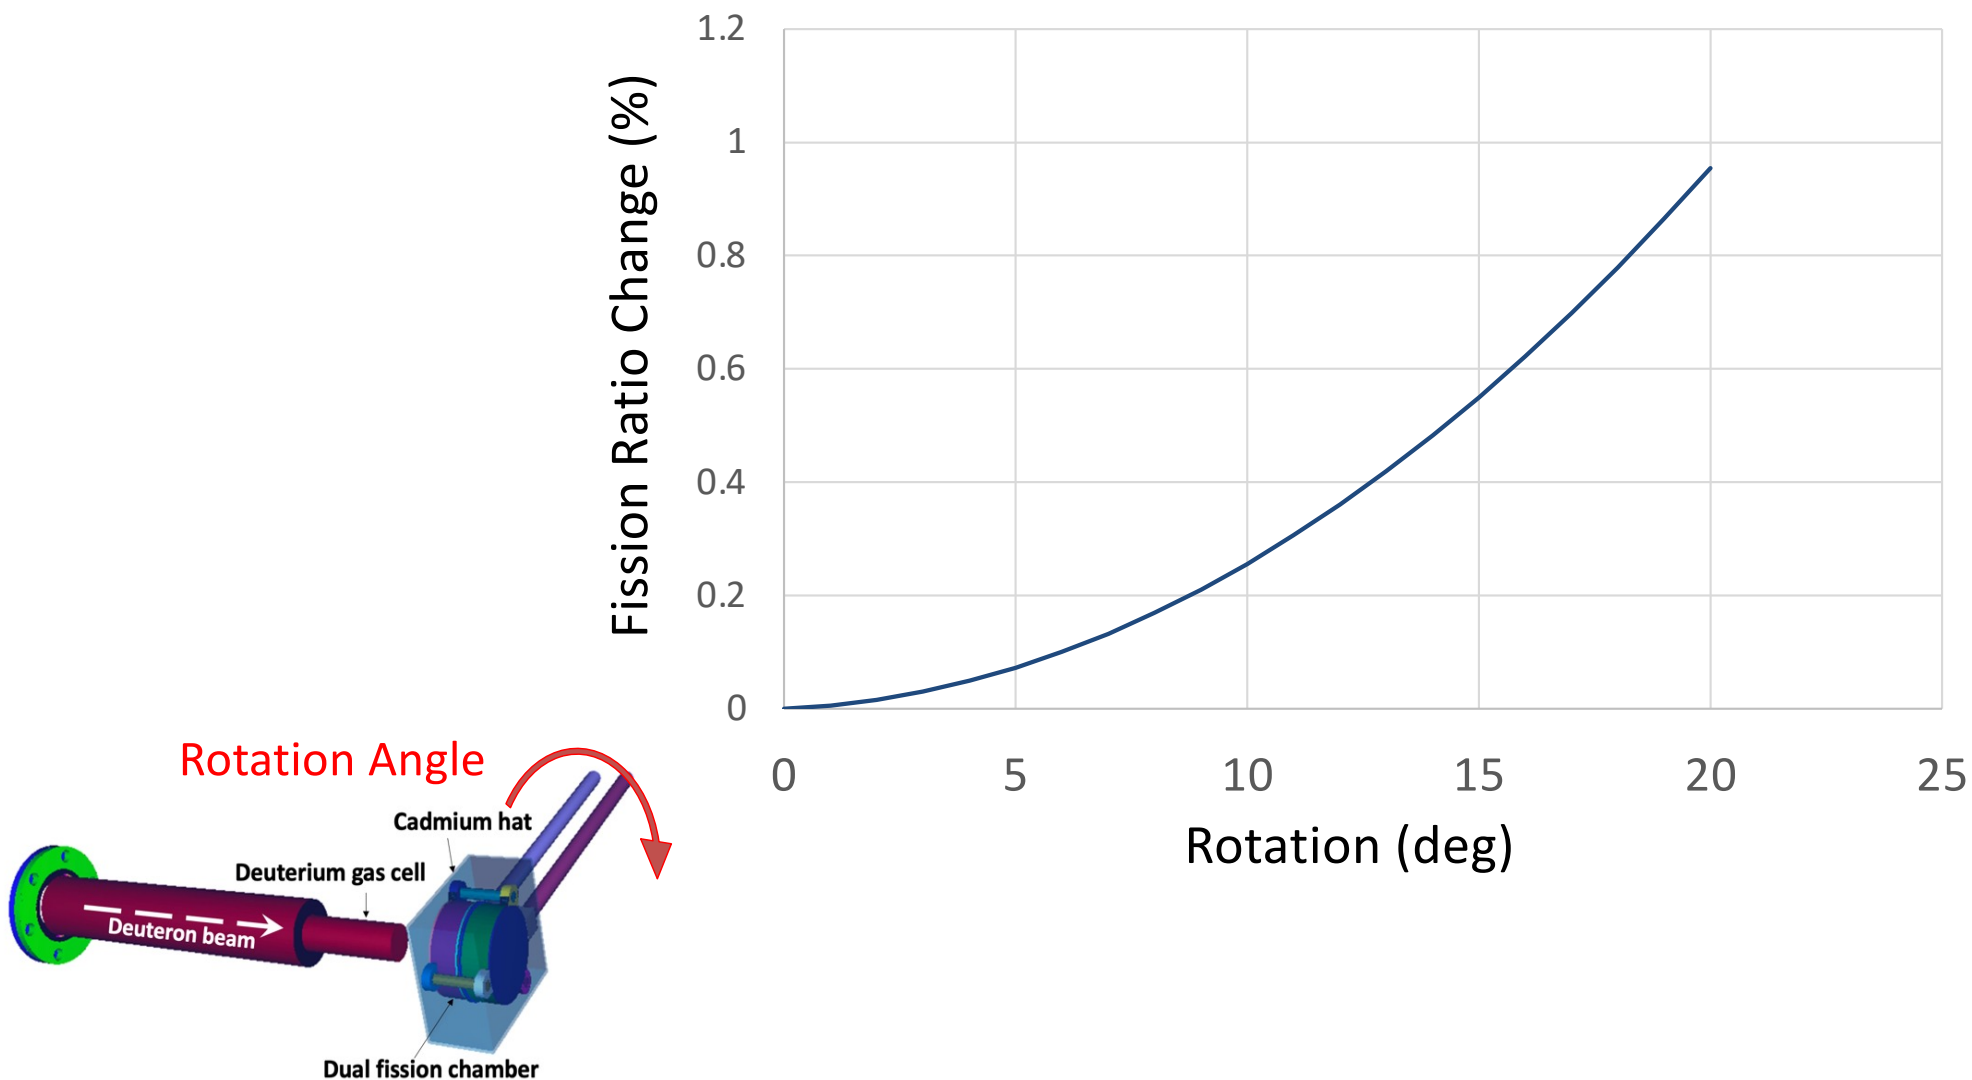


MCNP Calculations Confirm Limited Sensitivity to FC Radial Offset

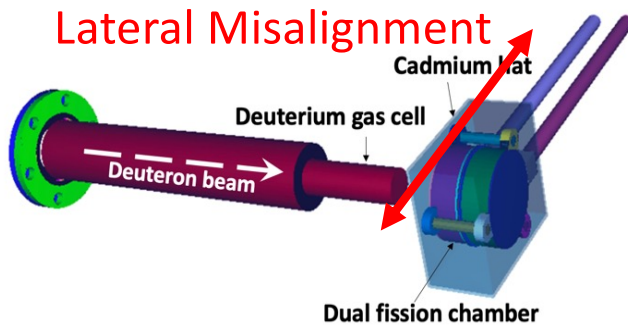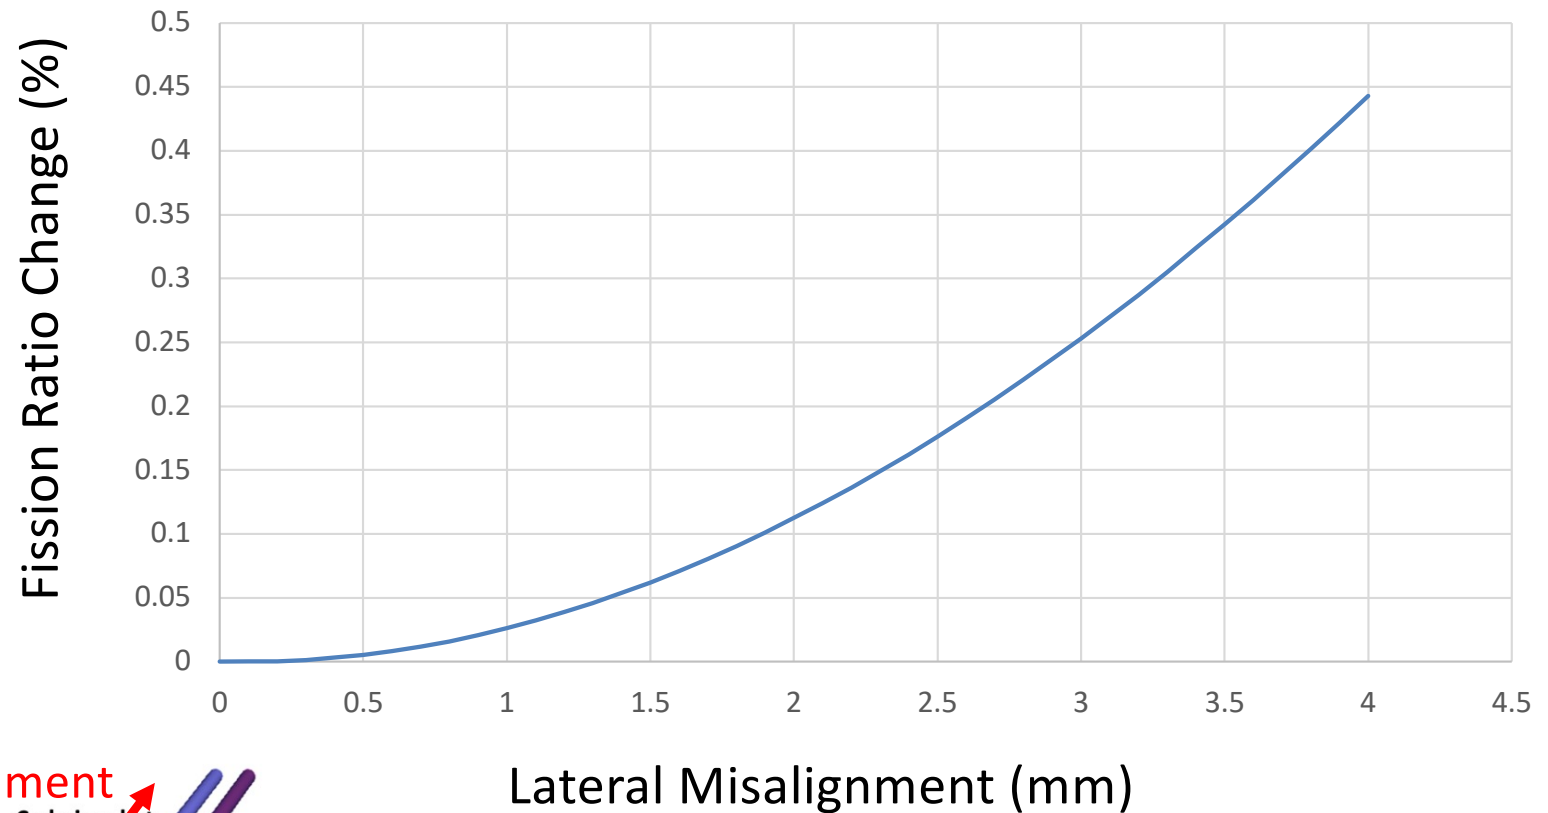

MCNP Calculations Quantify Sensitivity to FC Distance Offset

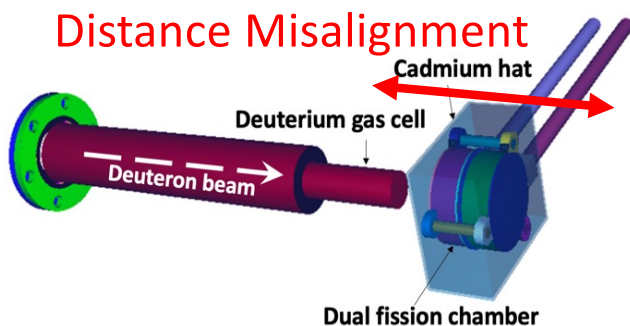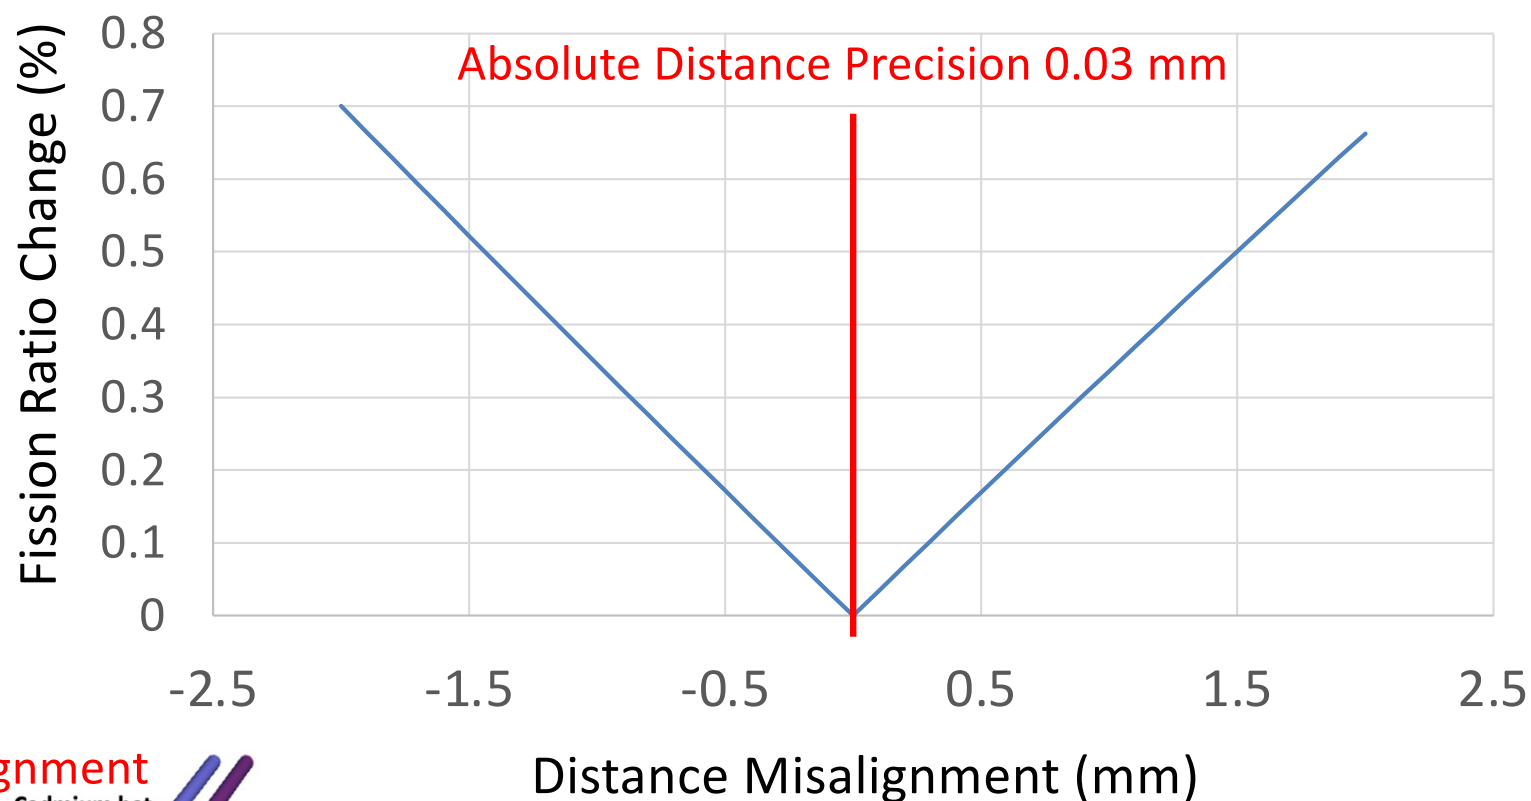

Fission Chamber ToF Confirms Low BG/Room Return

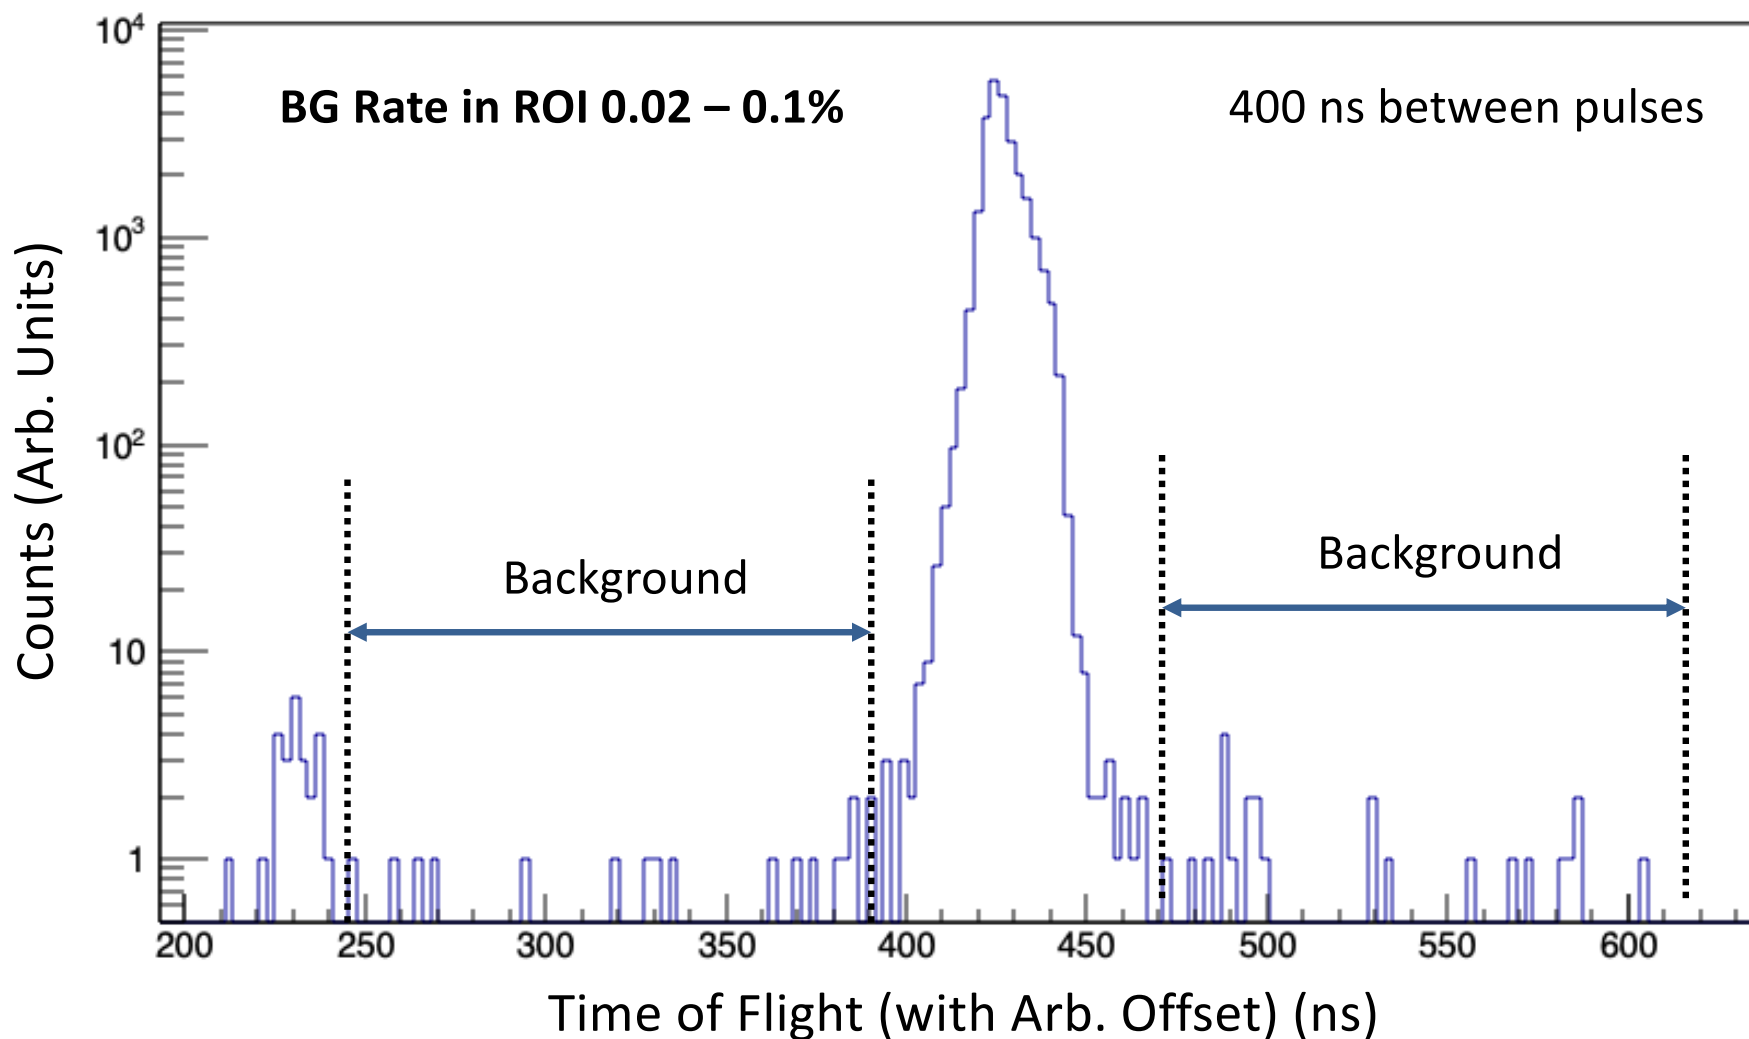

Fission Cross-section Ratio Equation



$$\frac{\sigma(U8)}{\sigma(U5)} = \frac{N(U5)}{N(U8)} \sqrt{\frac{U8_{meas\uparrow}}{U5_{meas\downarrow}} \frac{U8_{meas\downarrow}}{U5_{meas\uparrow}} \frac{\epsilon_{U5\uparrow}}{\epsilon_{U8\downarrow}} \frac{\epsilon_{U5\downarrow}}{\epsilon_{U8\uparrow}}}$$

Number of atoms in the target

Measured fission counts in the
Upstream (↑) and Downstream
(↓) orientation


Kinematic Boost Efficiency (GEANT4)
Upstream (↑) and Downstream (↓)

Atom Ratios Measured with a Dedicated Alpha Spectrometer

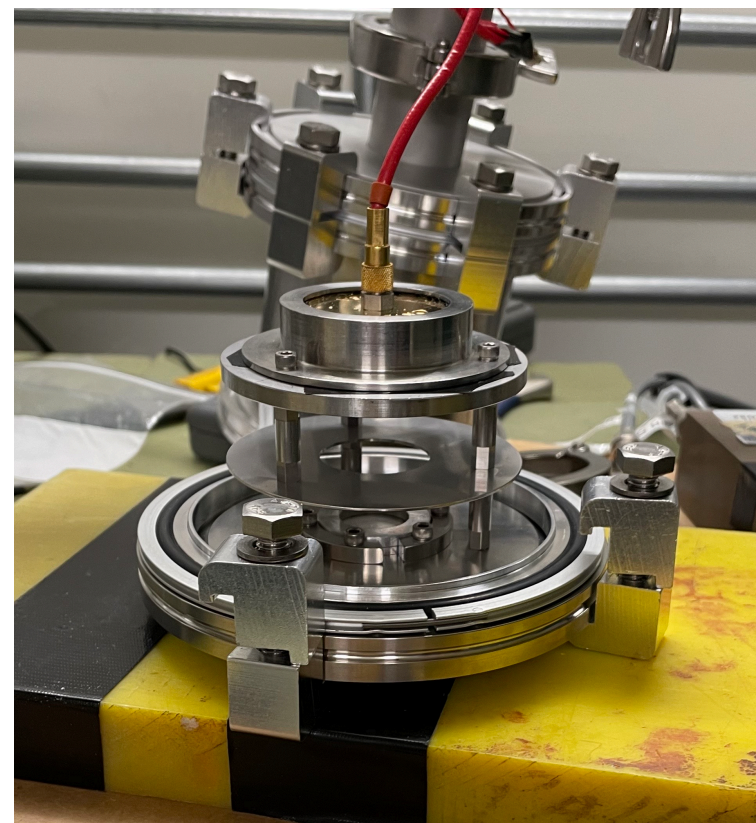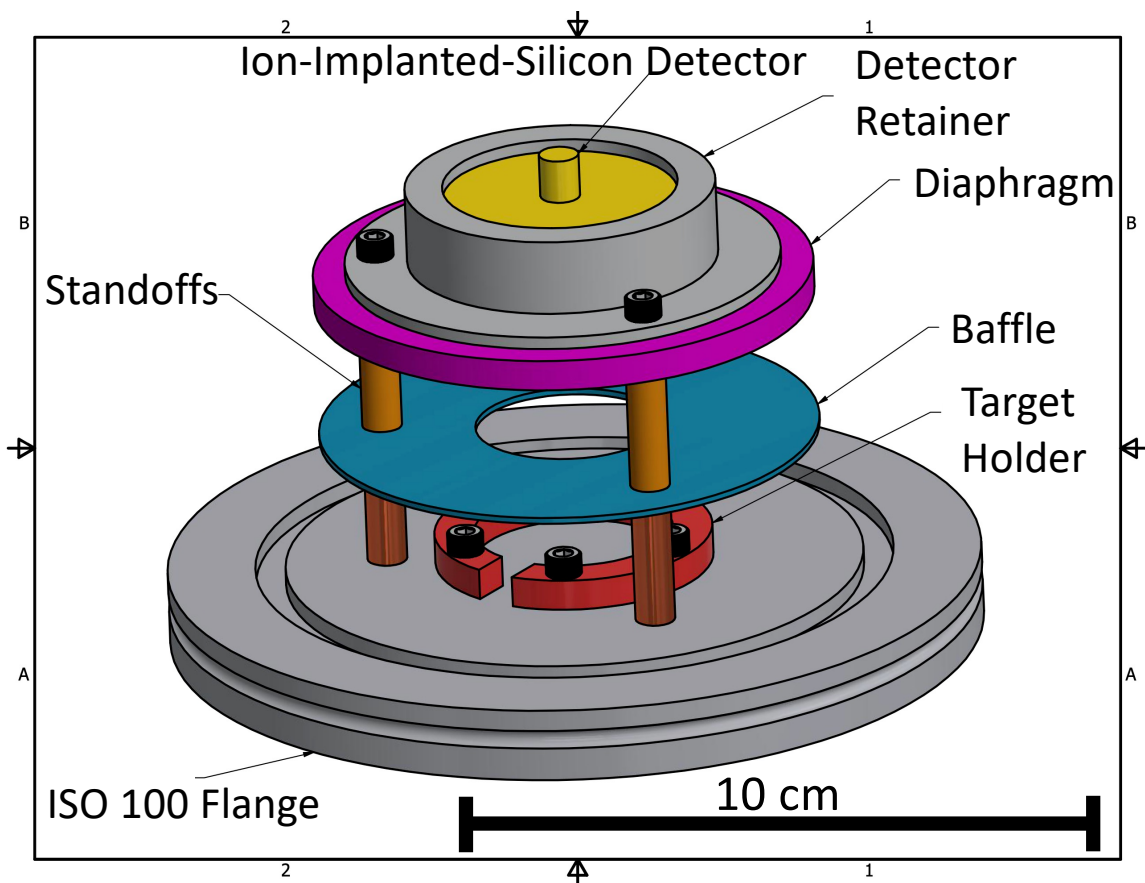

J. A. Silano *et al.*, Nucl. Instrum. Methods in Phys A **1063**, 169234 (2024).

Verification of Alpha Spectrometer Mass Measurements

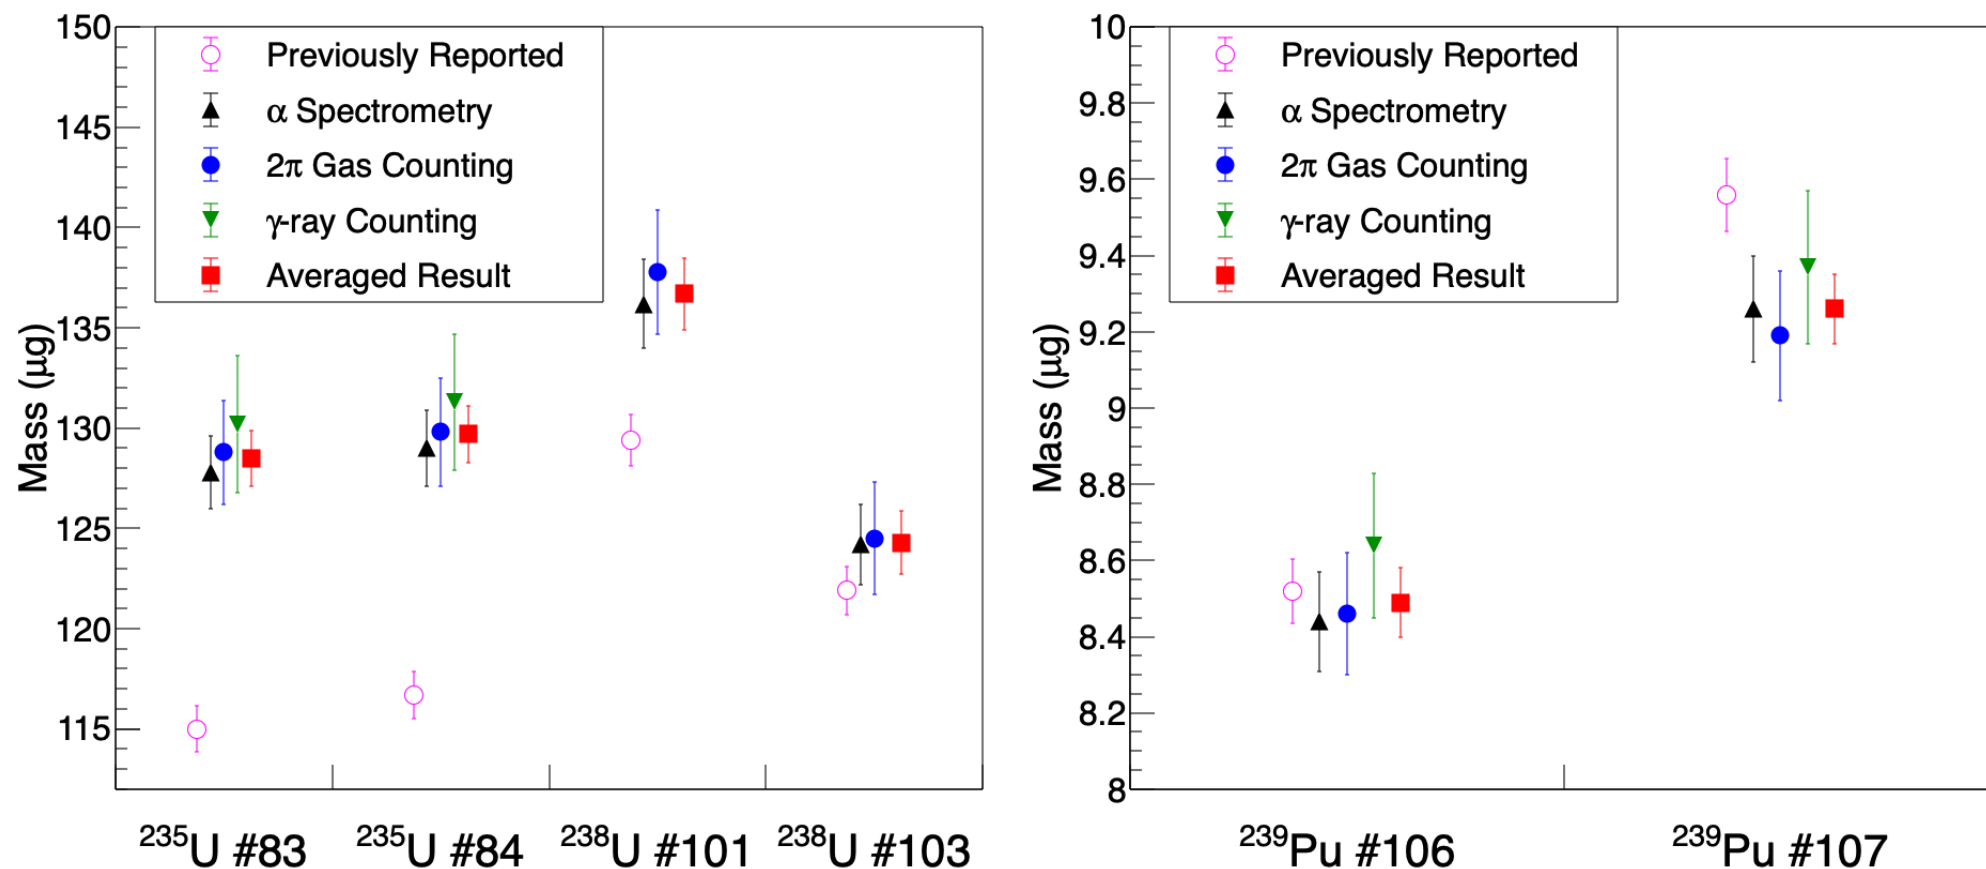

J. A. Silano *et al.*, Nucl. Instrum. Methods in Phys A **1063**, 169234 (2024).

Fission Cross-section Ratio Equation

$$\frac{\sigma(U8)}{\sigma(U5)} = \frac{N(U5)}{N(U8)} \sqrt{\frac{U8_{meas\uparrow}}{U5_{meas\downarrow}} \frac{U8_{meas\downarrow}}{U5_{meas\uparrow}} \frac{\epsilon_{U5\uparrow}}{\epsilon_{U8\downarrow}} \frac{\epsilon_{U5\downarrow}}{\epsilon_{U8\uparrow}}}$$





Number of atoms in the target

Measured fission counts in the
Upstream (↑) and Downstream
(↓) orientation

Kinematic Boost Efficiency (GEANT4)
Upstream (↑) and Downstream (↓)


Kinematic Boosting Correction Factor

Upstream Downstream

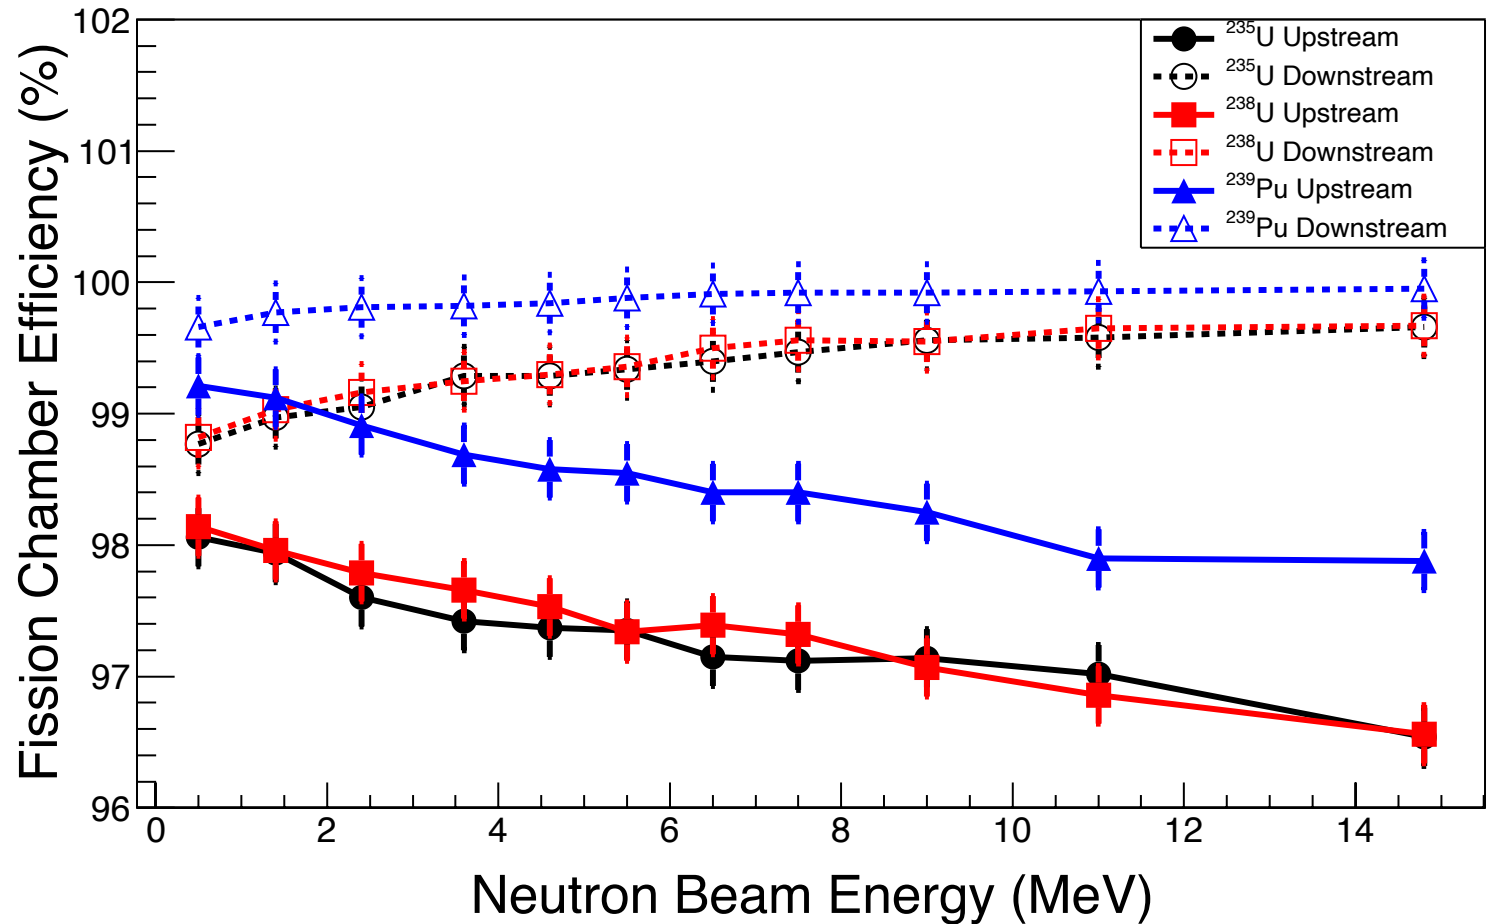


FREYA: R. Vogt and J. Randrup, Nucl. Instrum. Methods Phys. Res. A **954**, 161225 (2020).


Simulation Corrections Completely Account for Upstream/Downstream Systematics

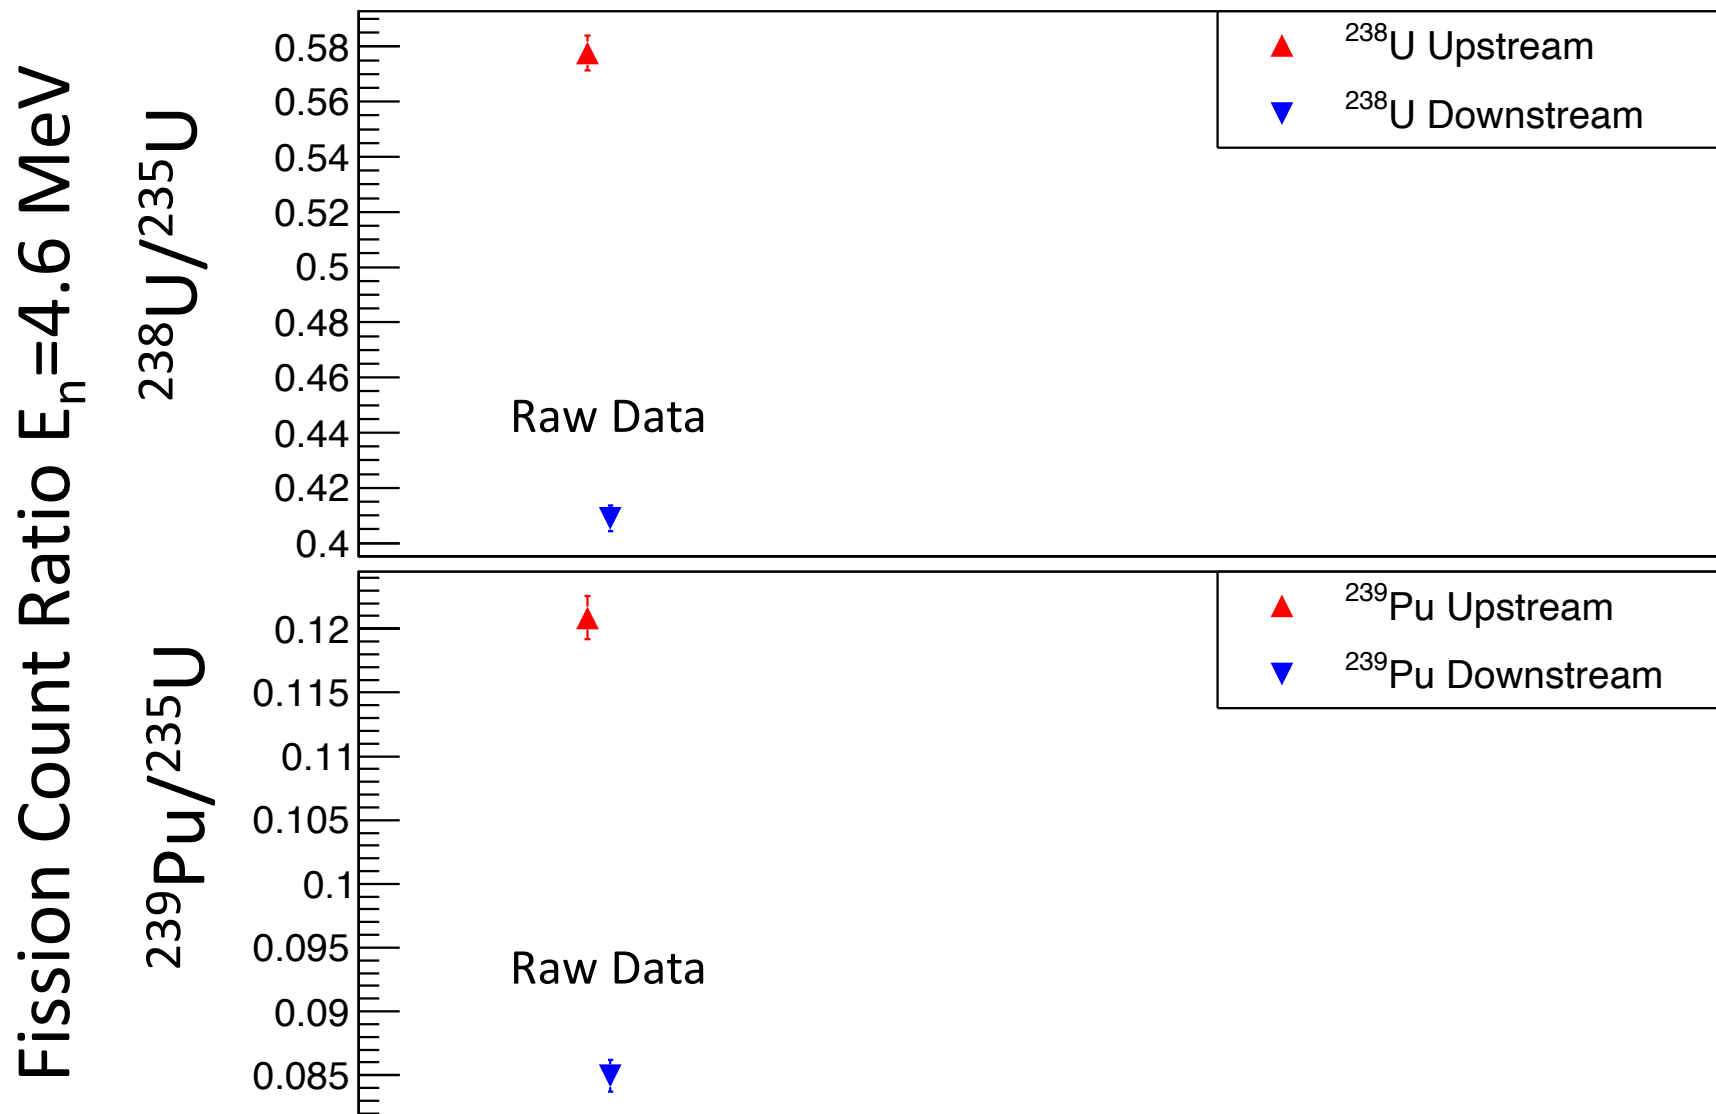

$^{238}\text{U}/^{235}\text{U}$ Cross-section Ratio Results

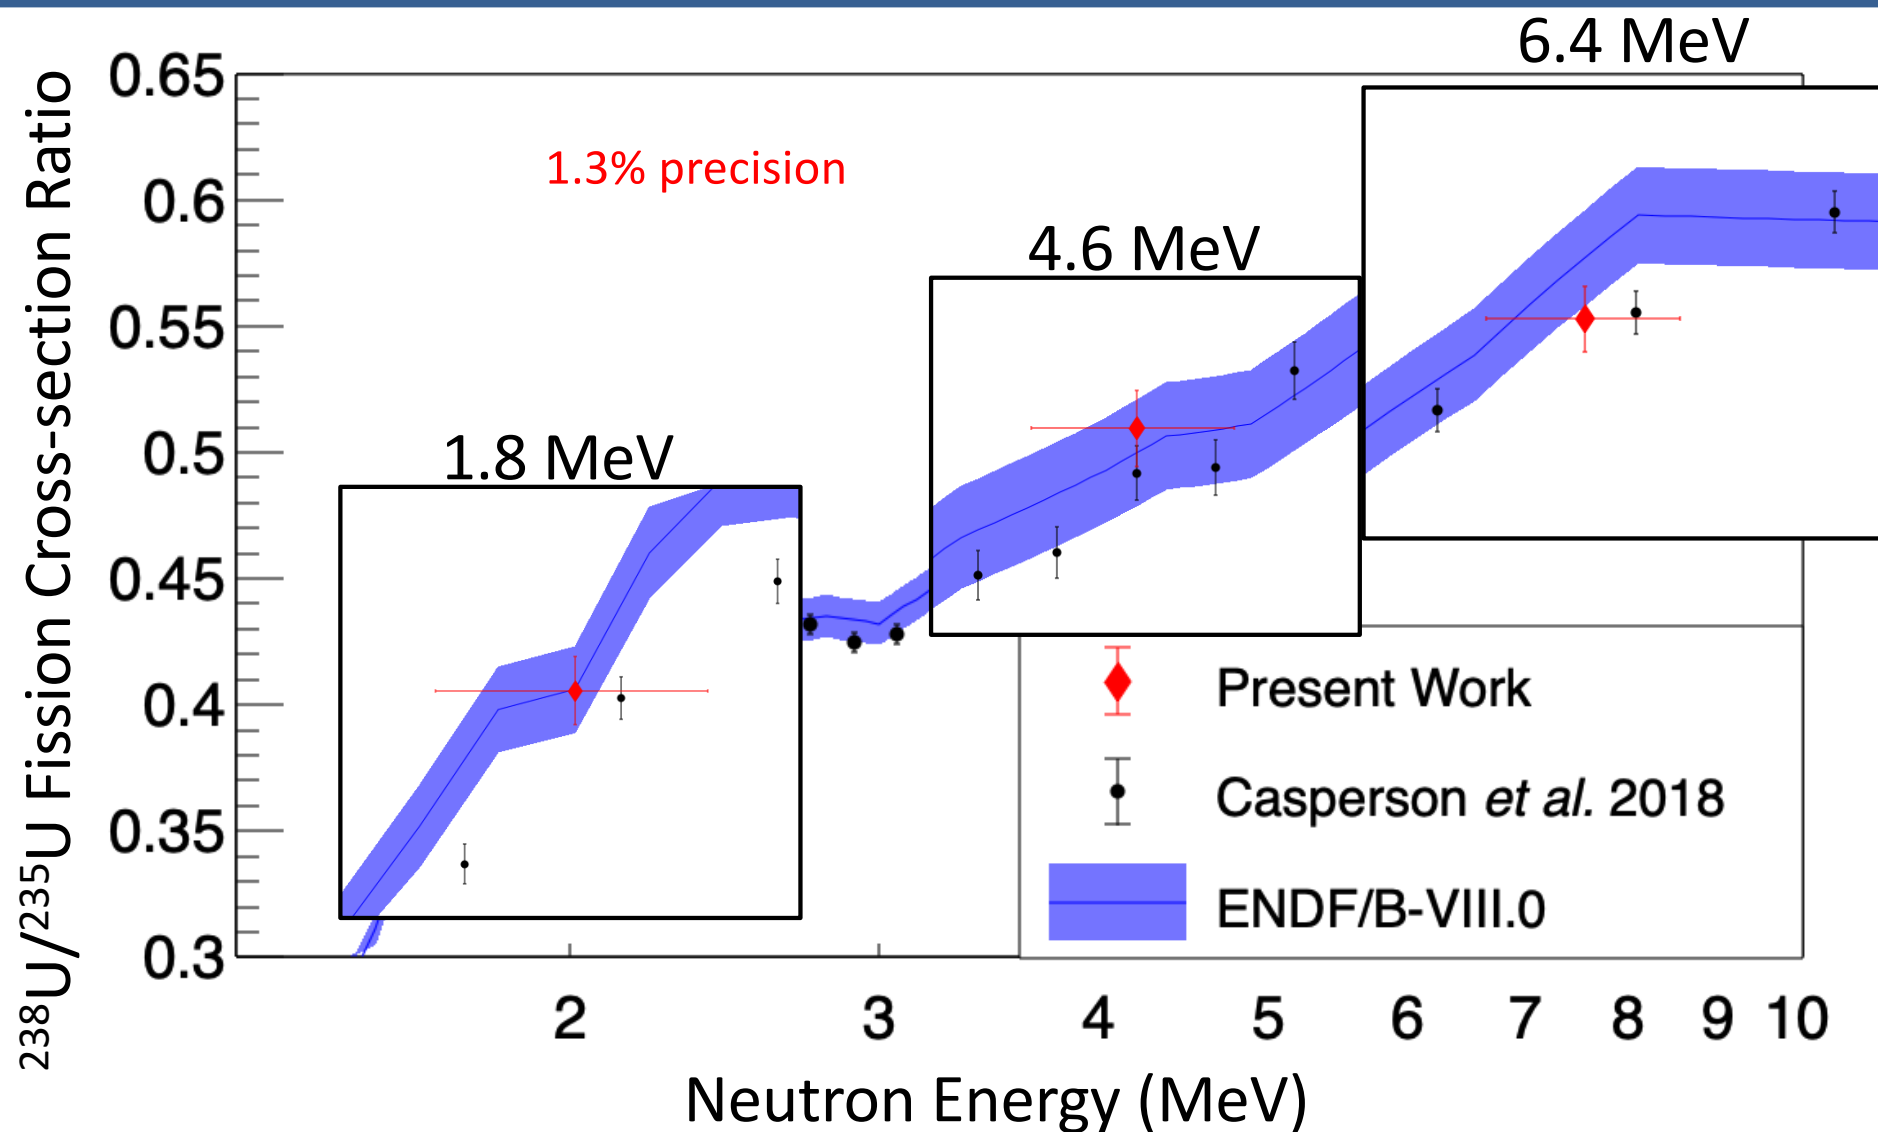



$^{239}\text{Pu}/^{235}\text{U}$ Cross-section Ratio Results

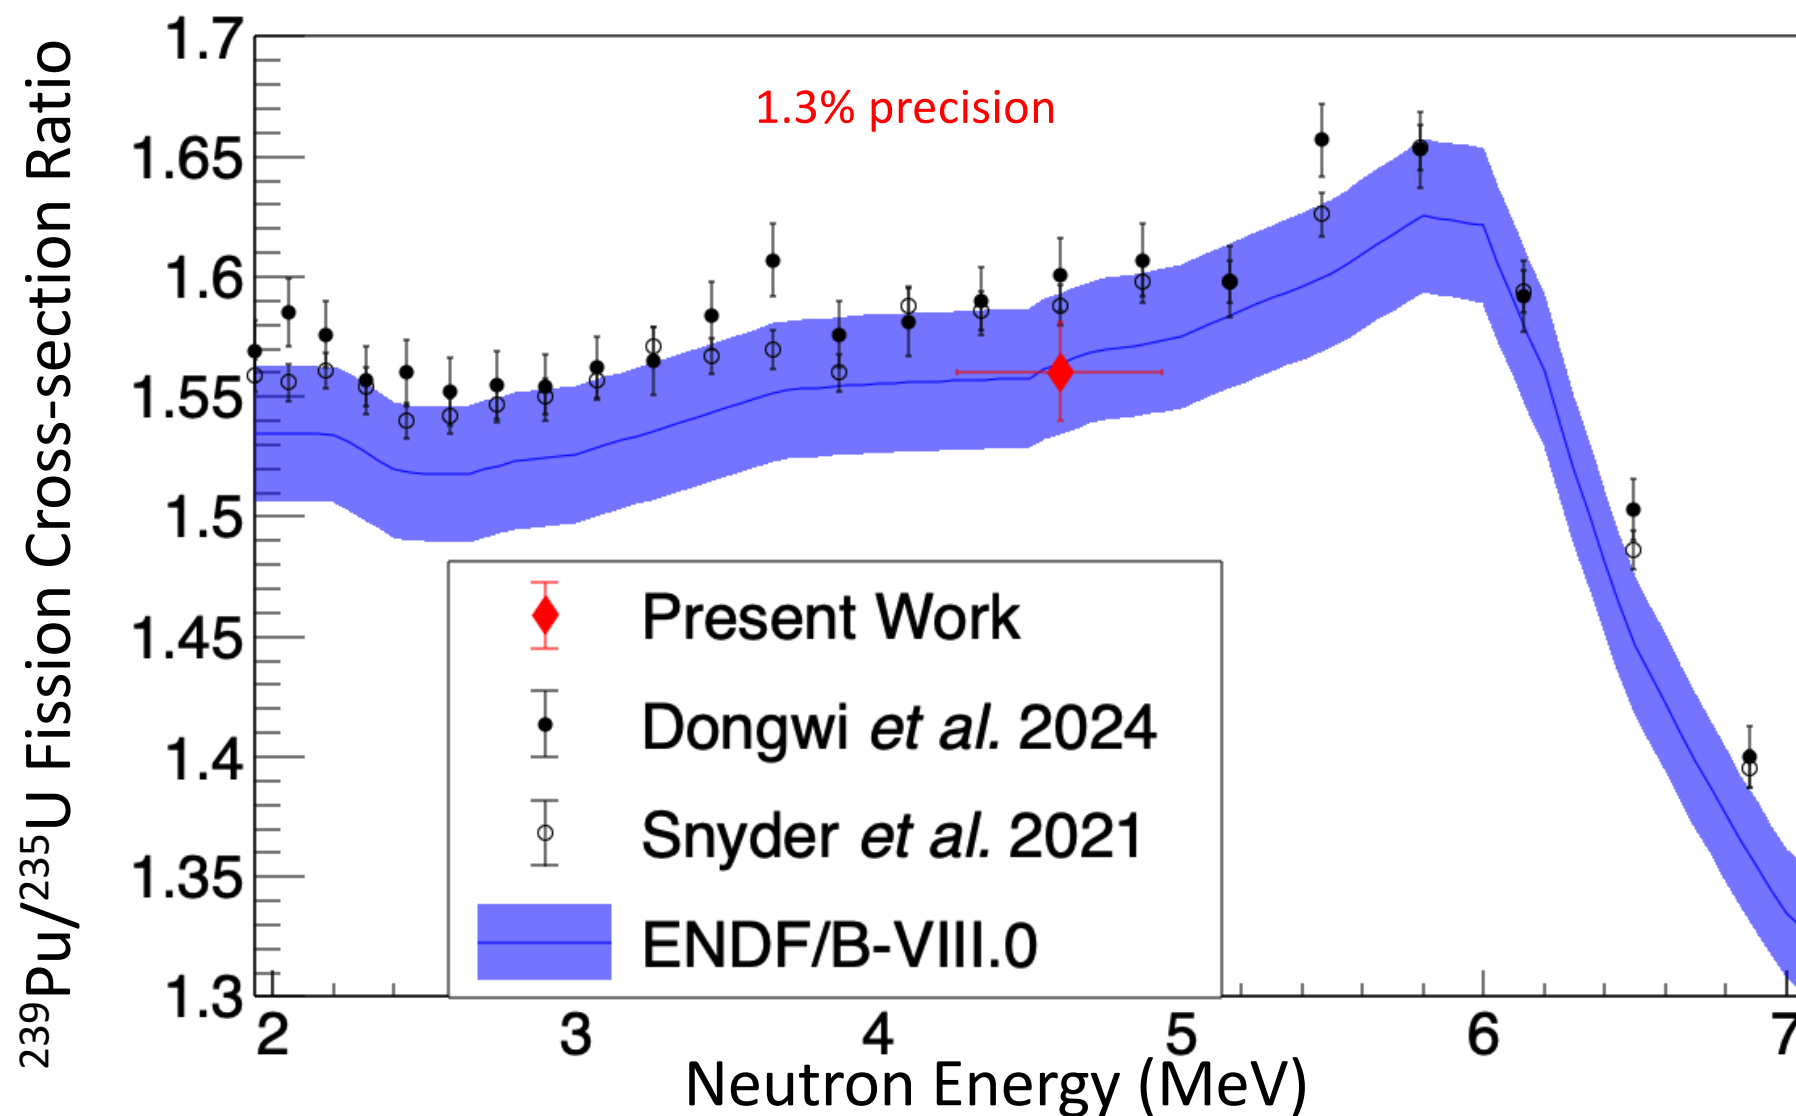

Next Step: Photofission at the High Intensity γ -ray Source (HI γ S) Facility

- Beam energy: 7-18 MeV
- Energy spread: 3% FWHM
- Flux on target: $5 \times 10^7 - 10^9 \gamma/s$


Example γ -ray Beam Spectrum

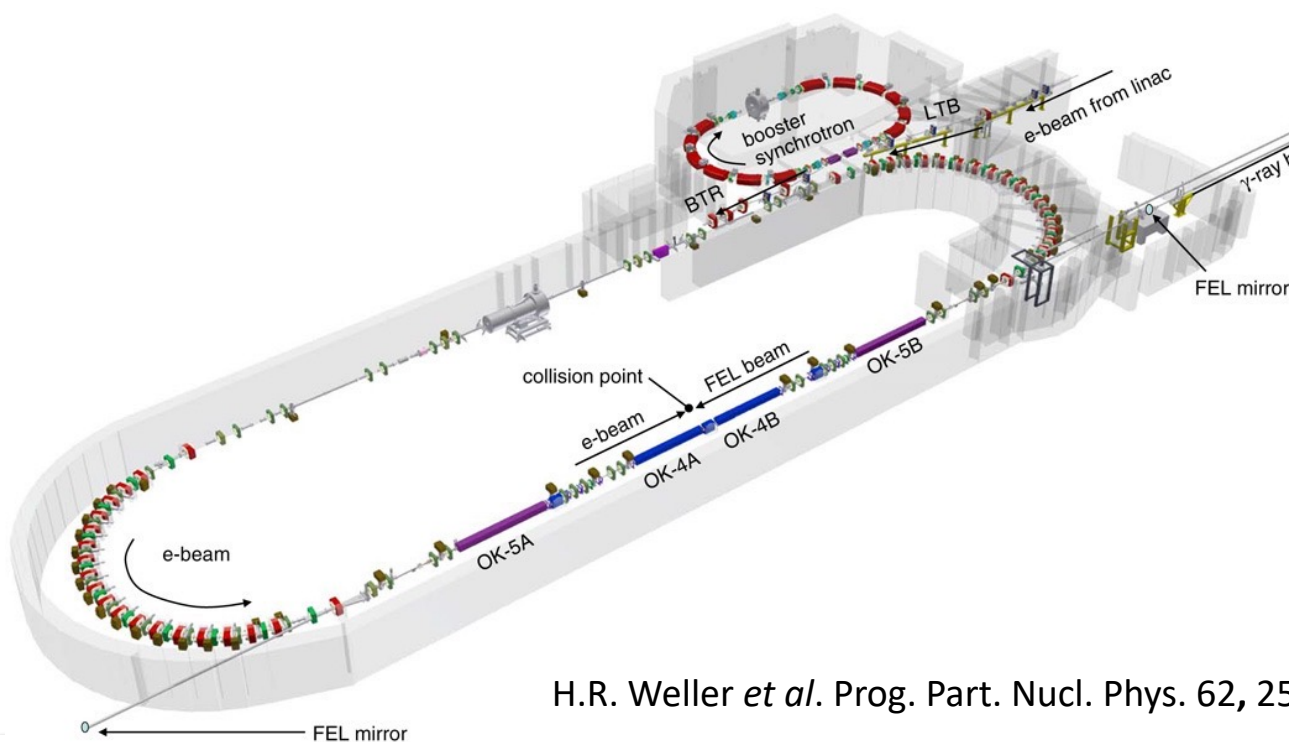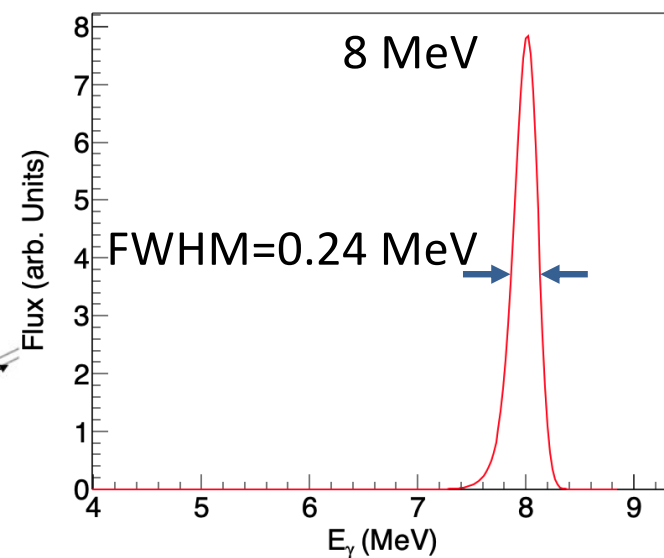

H.R. Weller *et al.* Prog. Part. Nucl. Phys. 62, 257–303 (2009)

Photofission Across the GDR

- Simultaneous measurement of photofission cross sections for ^{235}U , ^{238}U , ^{239}Pu , ^{240}Pu
 - Absolute CS (4-6% precision)
 - CS Ratios (1.6-3.2% precision)
- 74 hours of PAC approved beamtime
- $7 \text{ MeV} \leq E_\gamma \leq 18 \text{ MeV}$
 - 0.25 MeV steps

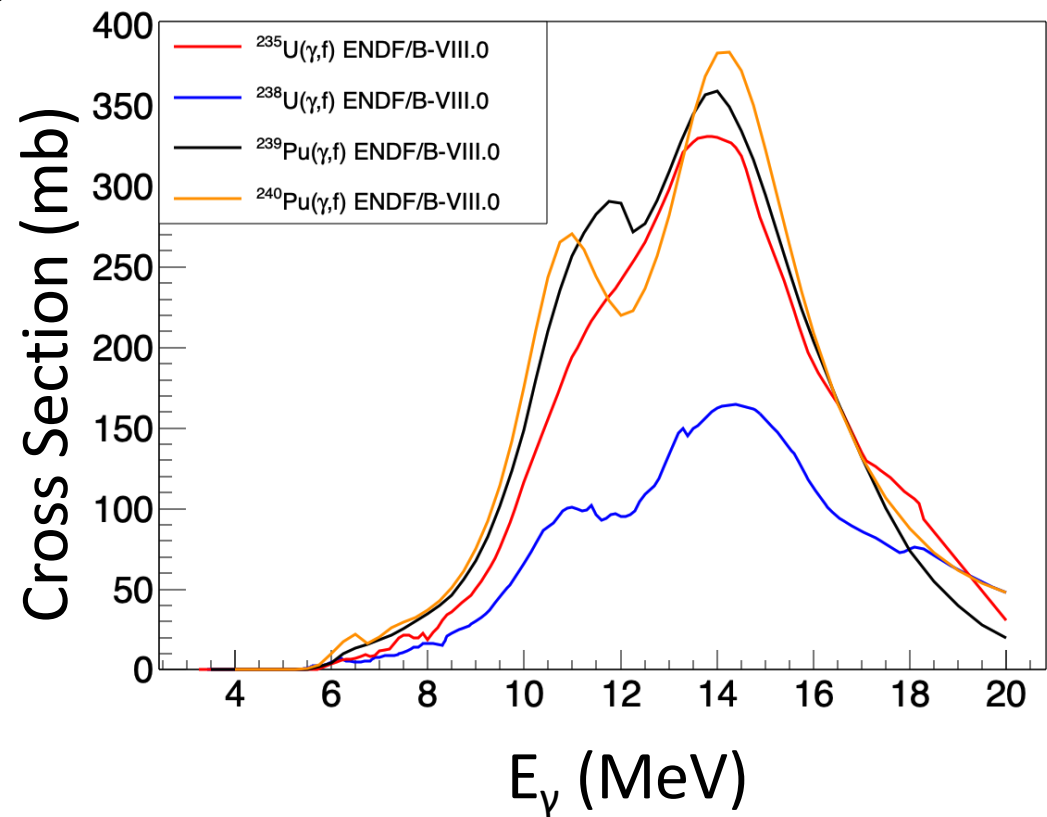



Disclaimer

This document was prepared as an account of work sponsored by an agency of the United States government. Neither the United States government nor Lawrence Livermore National Security, LLC, nor any of their employees makes any warranty, expressed or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States government or Lawrence Livermore National Security, LLC. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States government or Lawrence Livermore National Security, LLC, and shall not be used for advertising or product endorsement purposes.