


Proform

PF 300 Soffit Panel


Product Data



(Flat Pan Standard)

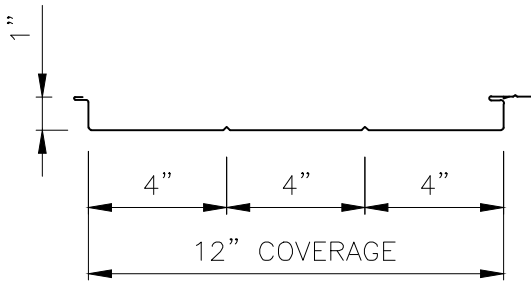

(Double Pencil Rib Optional)

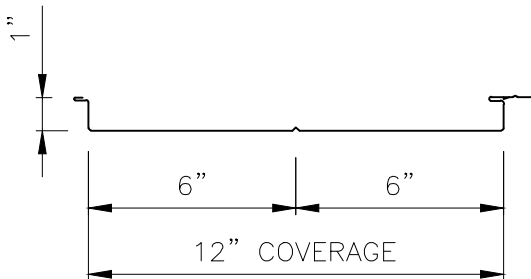

(Single Pencil Rib Optional)

Applications

Concealed fastener soffit/wall panel. Standard panel lengths from:
 26 GA. – 3' to 15' (can be cut down to 12")
 24 GA. – 3' to 8' (can be cut down to 12")

Substrates

Solid Wood Decking, Hat Section, Mac-Girts, or Wall Girts.

Material

Standard – 24 GA. ASTM A792 (50 ksi steel) AZ55 – Bare
 AZ50 – Painted
 – 26 GA. ASTM A792 (50 ksi steel) AZ55 – Bare
 AZ50 – Painted

Manufacturing

Roll formed in factory.

Finishes

Acrylic Coated Galvalume®
 Fluoropolymer (Kynar 500® PVDF resin-based)

Pan Conditions

Non-Vented (Flat Pan or Double Pencil Rib)

Vented (Flat Pan or Single Pencil Rib)

**Ventilation = 8% Net Free Air

Oil canning is inherent in all metal panels and is not cause for panel rejection. A signed oil canning acknowledgement will be required for all orders prior to production.

Testing *

Uplift: ASTM E1592

Air & Water Infiltration: ASTM E331 & E283



Testing and Approvals are product specific. Please inquire for details.

NOTE:

All data represented on this sheet may not be applicable to all widths and gauges. Please contact McElroy Metal for more information.

VENTING NOTE:


Due to venting/perforations, vented Marquee-Lok products must be stored inside. Any moisture cause cause premature rusting.

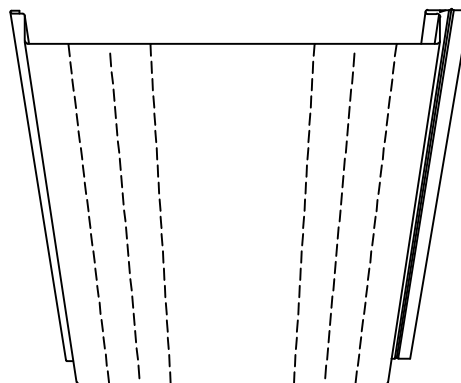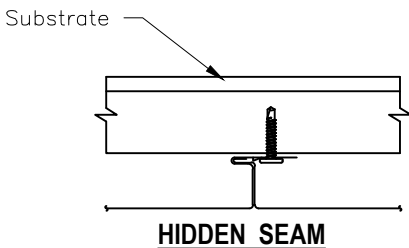

VENTED PANEL

(8% Net Free Air)

(Flat Pan or Single Pencil Rib Only)

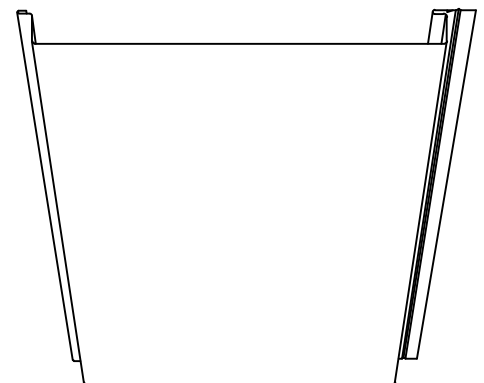

NON-VENTED PANEL

(Flat Pan or Double Pencil Rib Only)