




PROFORM METALS LTD

PF Board and Batten Panel

Product Data

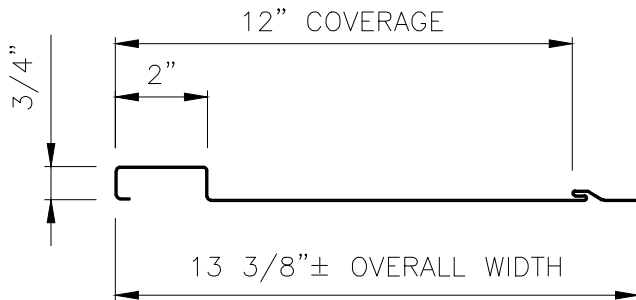

Applications

Wall panel. Standard panel lengths from 1'-0" to 20'-0".

Substrates

Plywood or OSB.

Material

Standard - 24 GA. ASTM A792 (50 ksi steel) AZ55 - Bare
AZ50 - Painted

Manufacturing

Roll-formed in factory.

Finishes

Acrylic Coated Galvalume®
Fluoropolymer (Kynar 500® PVDF resin-based)

Pan Conditions

Flat Pan

Oil canning is inherent in all metal panels and is not cause for panel rejection.

Testing *


Uplift: ASTM E1592 (Pending)

Wind: ASTM E283, ASTM E331 (Pending)

Testing and Approvals are product specific. Please inquire for details

NOTE:

All data represented on this sheet may not be applicable to all widths and gauges. Please contact Proform Metals LTD for more information.

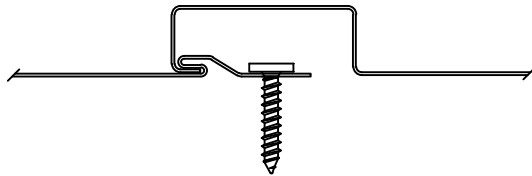

PF BOARD and BATTEN SEAM

