

CURVA DE OPERACIÓN

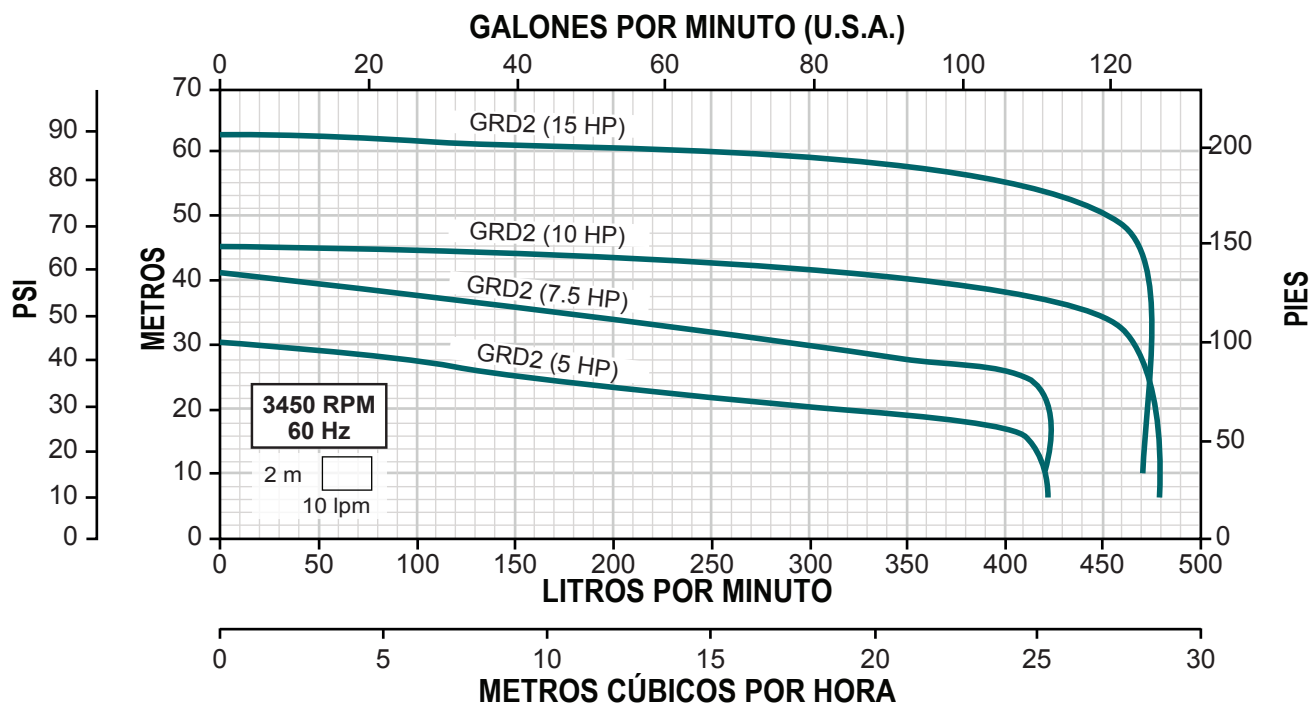


TABLA DE ESPECIFICACIONES

CÓDIGO	HP	KW	FASES X VOLTAJE	A	CARGA EN METROS (psi)					
					10 (14.2)	20 (28.4)	30 (42.6)	40 (56.9)	50 (71.1)	60 (85.3)
					GASTO (litros por minuto)					
GRD2-50-3230	5	3.7	3 X 230	14.2	420	300				
GRD2-50-3460			3 X 460	7.1						
GRD2-75-3230	7.5	5.5	3 X 230	19.5	420	422	290	30		
GRD2-75-3460			3 X 460	9.8						
GRD2-100-3230	10	7.5	3 X 230	25.5	480	478	416	350		
GRD2-100-3460			3 X 460	12.7						
GRD2-150-3230	15	11	3 X 230	36.4	470	472	476	472	450	230
GRD2-150-3460			3 X 460	18.2						

*Nuevos modelos.

DIMENSIONES Y PESOS

CÓDIGO	DIMENSIONES									PESO (kg)
	mm								PULGADAS	
	A	B	C	D	E	F	G	H	I	
GRD2-50-3230	610	405	125	205	205	255	345	220	2"	54
GRD2-50-3460										
GRD2-75-3230	635	440	130	200	220	270	360	225		67
GRD2-75-3460										
GRD2-100-3230	658	480	130	205	270	332	423	266		86
GRD2-100-3460										
GRD2-150-3230	668	510	130	205	270	332	423	266	2"	93
GRD2-150-3460										

