



# DECKDEFENSE®

High Performance Synthetic Underlayment

Featuring TruTread™ Technology for All-Weather Walkability



**TOTAL PROTECTION. TOTAL CONFIDENCE.®**




**SEAL.**



**DEFEND.**



**BREATHE.**



# CONFIDENCE IN EVERY CONDITION


Superior walkability,<sup>1</sup> wet or dry—that's what DeckDefense® high-performance synthetic underlayment delivers. TruTread™ technology uses an innovative proprietary textured surface for better grip and traction than competitive premium synthetic underlayments, so even in the most demanding installations, you can walk the roof with confidence.

Up to  
**2X**  
**STRONGER**  
than competitive premium underlayments<sup>1</sup>

Up to  
**6X**  
**TOUGHER**  
Designed to keep leaks out even after heavy wear and tear<sup>1</sup>



# REFORMULATED FOR EVEN BETTER PERFORMANCE

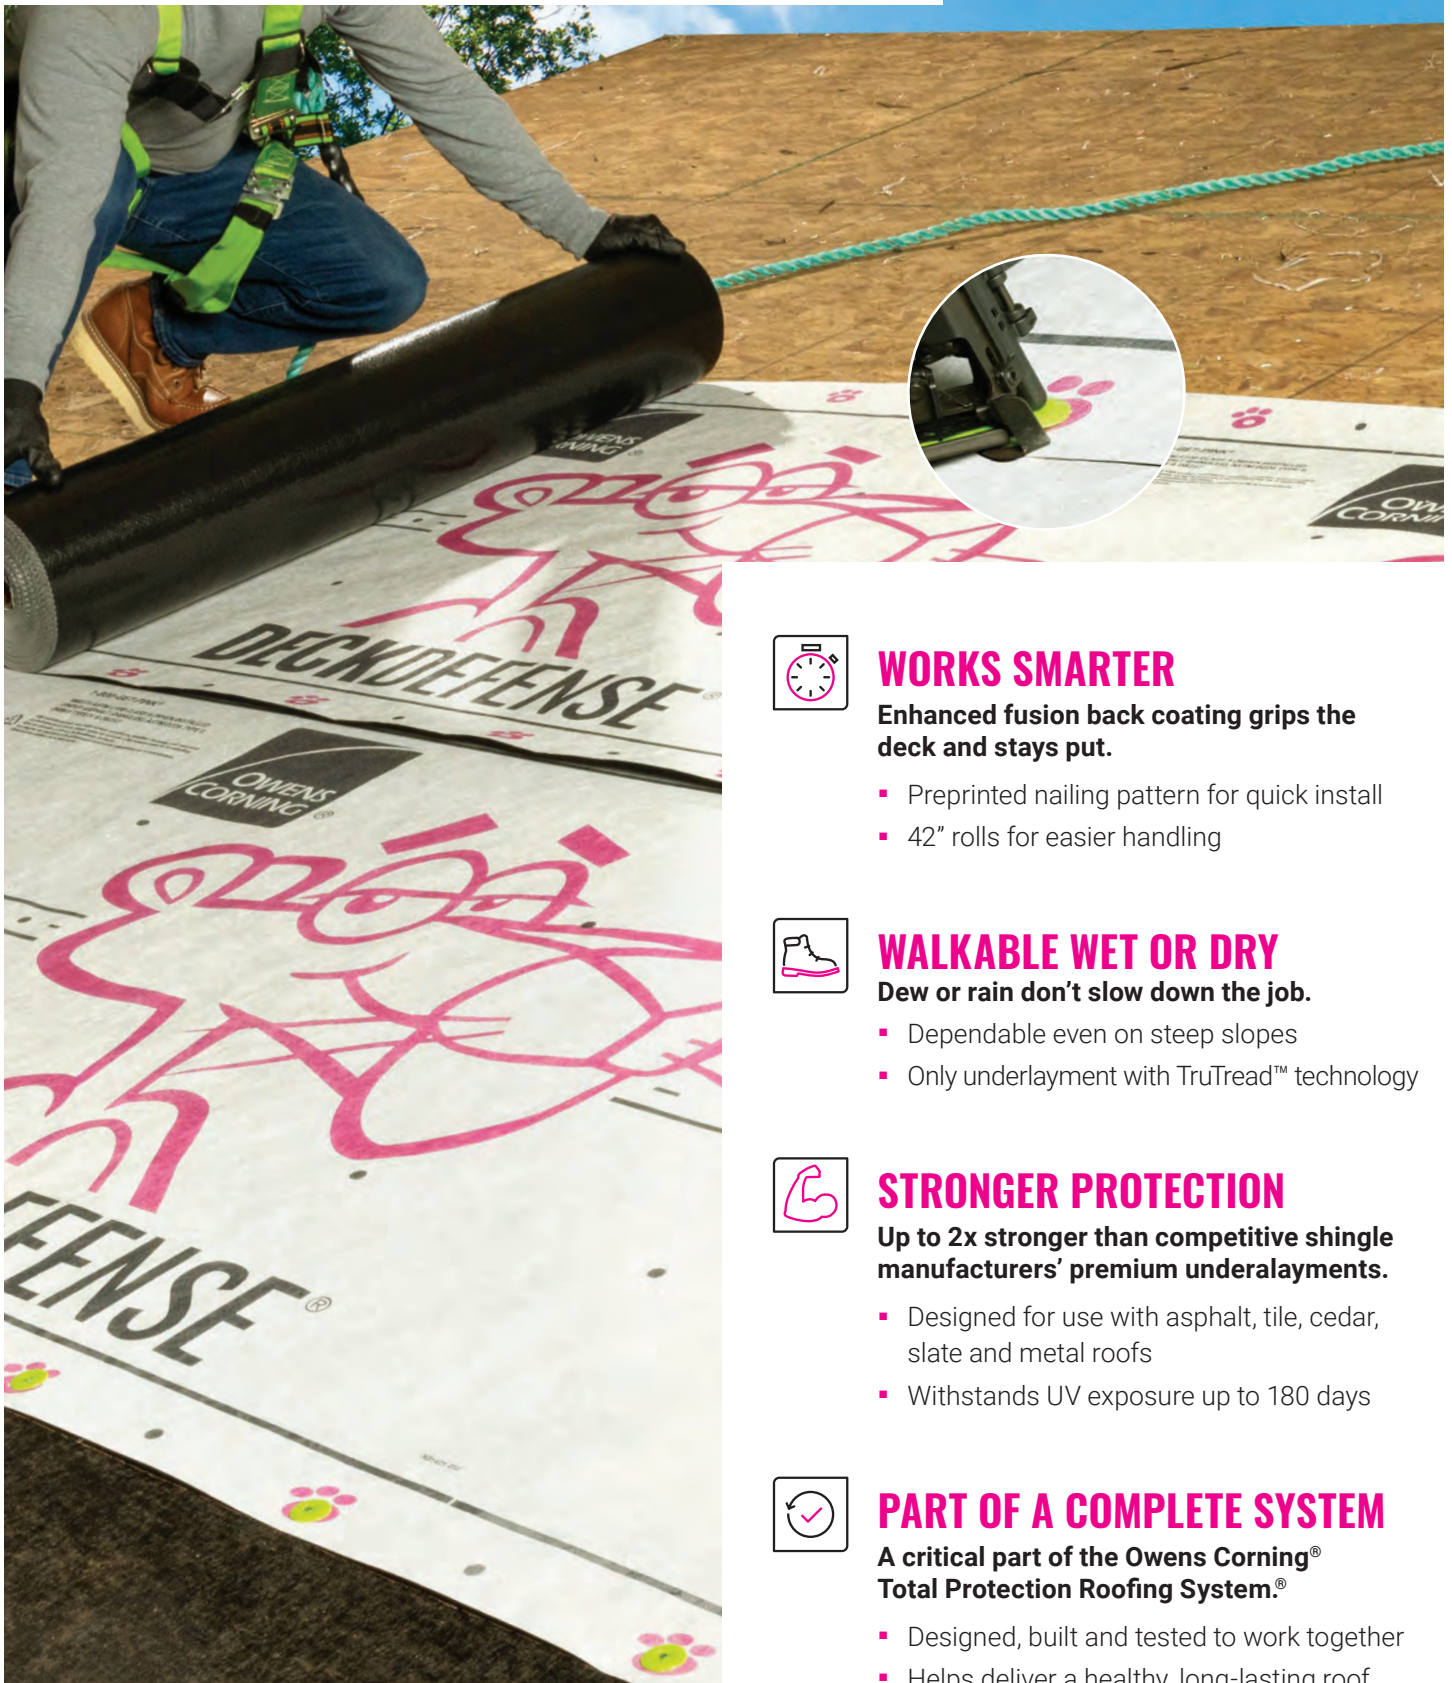

## WORKS SMARTER

Enhanced fusion back coating grips the deck and stays put.

- Preprinted nailing pattern for quick install
- 42" rolls for easier handling



## WALKABLE WET OR DRY

Dew or rain don't slow down the job.

- Dependable even on steep slopes
- Only underlayment with TruTread™ technology



## STRONGER PROTECTION

Up to 2x stronger than competitive shingle manufacturers' premium underlayments.

- Designed for use with asphalt, tile, cedar, slate and metal roofs
- Withstands UV exposure up to 180 days



## PART OF A COMPLETE SYSTEM


A critical part of the Owens Corning® Total Protection Roofing System.®

- Designed, built and tested to work together
- Helps deliver a healthy, long-lasting roof



# TOTAL PROTECTION SIMPLIFIED™

It takes more than just shingles to protect a home. It takes an integrated system of components and layers designed to perform in three critical areas. The Owens Corning® Total Protection Roofing System® gives you the assurance that all of your Owens Corning® roofing components are working together to help increase the performance of your roof.

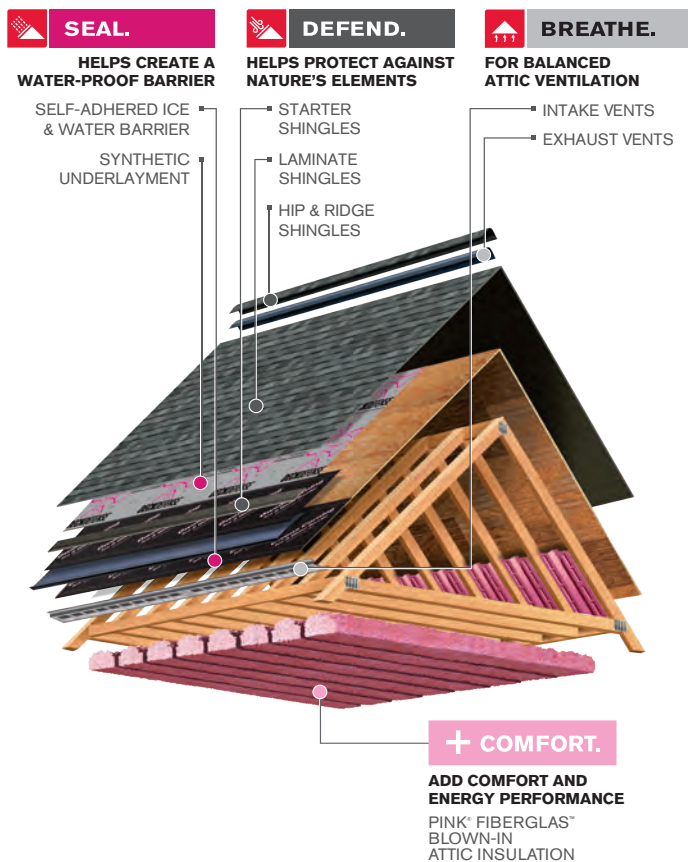

## Product Attributes

### Warranty Length

30-Year Limited\*

### Application

Asphalt, tile, cedar, slate and metal roof assemblies†

## Typical Values

Length per Roll	286 ft.
Width per Roll	42 in.
Nominal Weight per Roll	40 lbs. <sup>2</sup>
Roll Size	10 sq. roll
Exposed Color	Light gray
Surface Construction	Textured non-woven surface

## Applicable Standards and Codes

ASTM D226

ASTM D4869

ASTM D8257

ASTM E108/UL 790 (Class A Fire Resistance)‡

CCRR-0385

Florida Product Approval

Miami-Dade County Product Approval††

TDI (Texas Department of Insurance)



OWENS CORNING ROOFING AND ASPHALT, LLC  
ONE OWENS CORNING PARKWAY  
TOLEDO, OHIO, USA 43659

1-800-GET-PINK® | 1-800-438-7465  
www.owenscorning.com

Pub. No. 10010926-H. Printed in U.S.A. April 2022.  
THE PINK PANTHER™ & © 1964–2022 Metro-Goldwyn-Mayer Studios Inc.  
All Rights Reserved. The color PINK is a registered trademark of Owens Corning.  
© 2022 Owens Corning. All Rights Reserved.

^ Excludes non-Owens Corning® roofing products such as flashing, fasteners, pipe boots and wood decking.

\* See actual warranty for complete details, limitations and requirements.

† For non-asphaltic roofing materials, check with the manufacturer as to the suitability of using DeckDefense® High Performance Roof Underlayment. Install following the roofing manufacturer's application instructions.

†† Applies for all areas that recognize Miami-Dade County Product Control Section.

‡ Underlayment is tested as part of a roof assembly that includes wood decking, underlayment and asphalt shingles.

1 Compared to premium underlayments from competitive shingle brands.

2 Includes core weight.