

CENTURY DYNAMICS ARMS



PK-12 Vertical Mag Fed AR-12

MAGAZINE FED SEMI- AUTOMATIC SHOTGUN INSTRUCTION MANUAL

CENTURY BUNAMICS

READ THE INSTRUCTIONS AND WARNINGS IN THIS MANUAL CAREFULLY BEFORE USING THIS FIREARM

CENTURY DYNAMICS ARMS FORT WORTH, TX

GUN SAFETY RULES

Observe these rules of safe gun handling.

- 1. Always keep the muzzle pointed in a safe direction. Watch the muzzle at all times: never point a gun, accidentally or intentionally, at any person or anything you do not intend to shoot. identify the target before shooting; do not shoot at sounds.
- 2. Always treat any gun as if it is loaded it may be!
- 3. Keep your finger off the trigger while operating the action and at all other times until you are ready to shoot.
- 4. Keep the safety "on" or in the "safe" position at all times until you are ready to fire the gun. Move to shoot. Up to the previous line after the word intend to shoot. Do not rely on your gun's safety, the safety on any gun is a mechanical device and is not intended as a substitute for common sense or safe gun handling.
- 5. Learn how your gun functions and handles. If you do not thoroughly understand the proper use and cafe of your gun, seek the advice of someone who is knowledgeable.
- 6. Do not alter or modify and parts of a firearm.
- 7. Store guns unloaded, separate from any ammunition, and where children cannot get to them.
- 8. Be sure the barrel is clear of any obstructions before loading. Make it a habit to check the barrel every time before loading.
- 9. Be sure you have and use the proper ammunition. A 20-gauge shell will enter a 12-gauge chamber far enough so that a 12-gauge shell can be loaded behind it. Also, a 3-inch shell may fit into a 2 3/4-inch chamber, but the crimp at the mouth of the shell will unfold into the forcing cone. If either of these things occur and you fire the gun, the gun will explode, damaging the gun and possibly causing serious injury or death to you and those around you.
- 10. Wear protective shooting glasses and adequate ear protection when shooting.
- 11. Never climb or jump over anything, such as a tree, fence, or ditch, with a loaded gun. Open the barrel, remove the shells, and hand the gun to a friend or place it on the ground on the other side of the obstacle before crossing it yourself. Do not lean a gun against a tree or other object; it could fall and possibly discharge.
- 12. Do not shoot at a hard surface or at water. Bullet and shot can ricochet or bounce off and travel in unpredictable directions with great velocity.
- 13. Never transport a loaded gun. Do not place a loaded gun into a vehicle. The gun should be unloaded and placed into a case when not in use.
- 14. Never drink alcoholic beverages before or during shooting.

INTRODUCTION TO BATMAZ GROUP ARMS

For many of years, Batmaz Group Arms has been associated with the gun industry. After the word with modern technology and you have a product of true value and affordable quality. You have Batmaz Group Arms, we as Batmaz Group Arms thank you for the privilege of delivering a product to you that will provide you with years of pleasurable use. Happy shot gunning.

ABOUT YOUR MAGAZINE FED SEMI-AUTOMATIC SHOTGUN Your Batmaz Group Arms shotgun is gas operated.

The gas created from firing a live shot shell operates the action. Once the first shell has been fired, the next shell in the magazine will automatically cycle into the chamber, and this cycle will continue (each time the trigger is pulled) until all shells loaded in the magazine have been fired. The bolt will remain locked in the open position after the last shell is fired.

The technologically advanced gas metering system allows you to shoot 2 3/4 " and 3" shells interchangeably with any ammunition of the proper gauge for your shotgun with flawless performance. This and other fine features ensure that your shotgun will be a source of pride and pleasure for years to come. For 3 1/2" models the metering system allows you to shot heavy 2 3/4", 3" and 3 1/2" shells interchangeably.

SAFETY SWITCH OR BUTTON The safety is designed to stop the trigger mechanism.

TO FIRE. The safety on any gun is a mechanical device, and it is not intended as a substitute for common sense or safe gun handling. Always keep the muzzle pointed in a safe direction.



- 1. Point the shotgun in a safe direction and keep fingers off the trigger and out the trigger guard.
- 2. Depress the magazine catch and remove the magazine.



- 3. Pull the bolt back and lock it to the rear by depressing the bolt hold open lever. Once the bolt is locked to the rear, both visually and manually inspect the chamber of the shotgun to confirm that the chamber is empty. Also check to make sure the magazine ell is clear. Then cycle the bolt forward by pressing the bolt release lever.
- 4. Unscrew the front handguard secure cap and remove it.
- 5. Remove the Forearm.





- 6. After you remove the forearm, push "Cartridge Ramp Lock Button" and remove "Fixing Nut Barrel".
- 7. Remove the barrel to the rear slightly.






8. Remove the operating handle.



- 9. You are now ready to remove the bolt, bolt carrier and recoil spring. Remove this set to the rear slightly.
- 10. Further disassembly is not required for regular cleaning and maintenance.

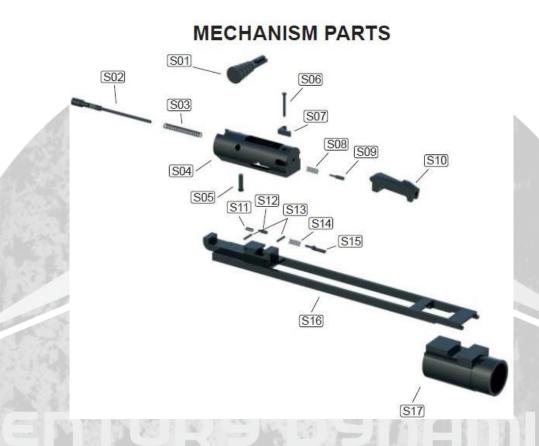



BARREL AND ASSEMBLY EQUIPMENT PARTS





MECHANISM PARTS

S01 OPERATINIG HANDLE

S0 2. . I RING PIN

S03 FIR ING PIN SPRIN G

S04 MECHANISM

Sos FIRING PIN CLAMP PIN

S06 EX RACTOR CLAMP PIN

S07 EXTRACTOR

S08 EXTRACTOR SPR IN G

S09 EXTRACTOR BACK PIN

S10 LOCK

S11 OPERATINGHAND LOCKING SPRING

S12 OPERA TING HANDLE LOCKING PIN

S13 FIXI N G PIN

S1 | ECHANISM FIXINGSPRING PIN

S15 MECHANISM FIXING PI

S16 A CH ON BAR

S17 A CTION BAR SLEVE

STOCK&BUTTOM RECEIVER & TRIGGER GROUP PARTS LIST

Ho1MECHAN ISM LOCK BREAK

Ho, CARTRIDGE LIFTER

Ho3 BREAK LOCK ASS MBLING IPIN

Hoa.BREAK LOCK SPRING

Hos BREAK LOCK FIXED RECEIVER

H06 SAFETY LINK

Ho7 MAGAZIN LOCK

Ho851\FETY LOCK PIN

Hog S/1.FETY LOCK SPRING

Hw SA FETY LOCK .SET SCREW PIN

H11 S YNIHETIC MAIN RECEIVER

H12CARTRIDGE LIFTER LOCK SPRING

H13 CARTRIDGE LIFTER LOCK PIN (S'INTHIETIC MODEL)

H14 HAND GRIP BU TOM COVER

H15 HAMMER HOLDER

HI MA GAZIN LOCK PIN

H1171HAMMER HOLDER SPRING

H18 M AGAZIN LOCK BUTTON SPRING

H19 MAGAZINE LOCK IBUTTON

H20 MAIN RECEIVER PINS

H21 TRIGGER SPRINGS

H22 TRIG GER

H23 INSIDE RI GGER

H24 HAMMER SPRING

H25 HAMMER

STOCK SETS & MAGAZINE PARTS

P01 BUTT PAD

Po2 srock MAIN SCREW

Po3 REMOVEABLE STOCK

Po4 ASSEMBIY SCREWNU

Pos BUTT PAD FIXI NGSCREW

Po6 SLING SWIVEL NUT SCREW

Po7 SLING SWIVEL NUT PIN

Po8 SLING SWIVEL AREA

Po9 MONOBLOCK EIUTTOM HEC:EIVE R (SYNTHETIC MODEL)

P10 FOREARM (SYNTHETIC MODEL)

P11 ALUMINIUM FOREARM UPPER PART

P12 REMO VEABLE SIDE PICATINNY

P13 PICAT INNY NUTS

PM PICATI NNY FI XI NG SCREW

P15 BARREL ASS MBLY NU S LOCKING EQUIPME NTS

P16 BARREL ASSEMBLY NU S

P17 BARREL ASSEMB LY NUTS LOCKING EQUIPMENTS (ALUMINIUM FOREARM M ODEL)

P18 BARREL ASSEMB LYNUTS (ALUMINIUM OR ARM MOD |

P19 SLING SWIVEL NUTS

P20 ALUMINIUM FOREARM ASS MBLY NUTS

P21 ALUMINIUM FOREARM BUTTOM PART

P22 MAGAZINE SIDE EXTRACTOR SPRING

P23 MAGAZINE SIDE EXTRACMR NUT

P24 MAGAZINE SIDE EXTRACTOR

P2S MAGAZINE UPPER PLUG

P26 2RD MAGAZINE

P27 SRD MAGAZINE

P2810RD MAGAZINE

P29 2RD MAGAZINE SPRING

P30 5RD MAGAZrNE SPRING

P3110RD MA GAZIN: E SPRING

P32 MAGAZ IN'E BUTTOM PLUGLOCK NUT

P33 MAGAZI NE BUTTOM PLUG

BARREL AND ASSEMBLY EQUIPMENT PARTS

1 01 UP RECEIVER

T02BARRELLUG

To3 BARREL

T04 OOOR BUSJIER

TOS BIG PISTON

T06 BIG PIISTON ORING

To7 LIN K TUBE (SYNTI-IE11C FOREARM MODEL)

1'08 MAIN SPRING(SYNifl-IETI CFOREARM M ODEL)

Tog UPPERm vrn (SYNTHETIC rnREARM MODEL)

110 ASSEMBLINGNUT(SYNTI-IETtCFOREARMMODEL)

111MA IN SPRING (AL UMINIUMFOREARM MO DEL)

T12 LINK TUBE (ALUMINIUM FOREARM MODEL)

T13 SMALJL PISTON

114 SMALL PIS TON ORING

T15 GAS DISCHARGE VALVENUT

116 SLINGS WIVEL NUT

117 ASSEMB LINGNUT

STORAGE

Clean thoroughly and oil your gun before storage. Store the gun in a case to prevent scratches and dents.

Store in a dry place to prevent corrosion. Store the gun away from children and in place where it cannot be obtained by those unauthorized to use it. Always store gun unloaded and separately from any ammunition.

IMPORTANT

USAGE OF STEEL SHOT

The choke (bore constriction) in all modern shotguns has been established based on the pattern performance of shot shells loaded with lead shot. When using the steel shot shells, you will notice a different performance in pattern density versus the established lead shot pattern, because the steel shot is harder and lighter than lead shot.

You should be aware of the following differences and cautions: Never shoot steel shot loads in a full choked barrel or full choke tubed barrel. To do so may cause the barrel to swell or rupture. In general, steel shot fired with a modified choke will produce the equivalent of a lead full choke pattern. This will be true of all steel shot sizes up to and including no. 2. The established improved cylinder chokes will produce the equivalent of a (lead) modified choke pattern. All steel shot sized larger than no. 2, and including special sized such as -F-, "T", etc., should be used only with improved cylinder chokes. These steel shot sized, when used in improved cylinder chokes, will produce patterns equivalent to (lead) full choke patterns. The established cylinder choke or bore will produce the equivalent of a modified (lead) pattern. Additional information concerning the use of steel shot is available from Remington, Winchester, Federal and other ammunition companies.

PARTS A L

To order parts, please furnish the following information: Your name, address, telephone number, firearm serial number, make and model. When we receive your request we will send you an order from and a parts breakdown with prices.


MAINTENANCE AND CLEANING

Caution: Make sure the gun is unloaded.

- 1. Make sure that the broad, polished, finely fitted mating surfaces of the breech block and receiver are especially clean and lightly oiled with a high quality gun oil. Do not use pure silicone or lanolin.
- 2. Run an oil patch through the bore with a cleaning rod starting from the breech end. To prevent leading, use a cleaning solvent and brass brush to clean the bore periodically. Follow this cleaning with one or two clean oil patches. Important: If your gun is equipped with choke

tubes, do not use a brass brush to clean the barrels unless a choke tube is installed in **each** barrel. Barrels that utilize choke tubes must also have the choke tubes removed to clean and oil the threads inside the barrel and the choke tubes themselves. This will protect the threads from being damaged by cleaning tools and also prevent a dirt build up that would cause the choke tube to become difficult to remove from the barrel. Damage can result to choke tubes and barrel when attempting to remove sticky choke tubes.

Never fire your gun without choke tubes snuggly tightened in barrels. Do not over tighten choke tubes. Wipe all exposed metal surfaces with an oiled cloth before storing.

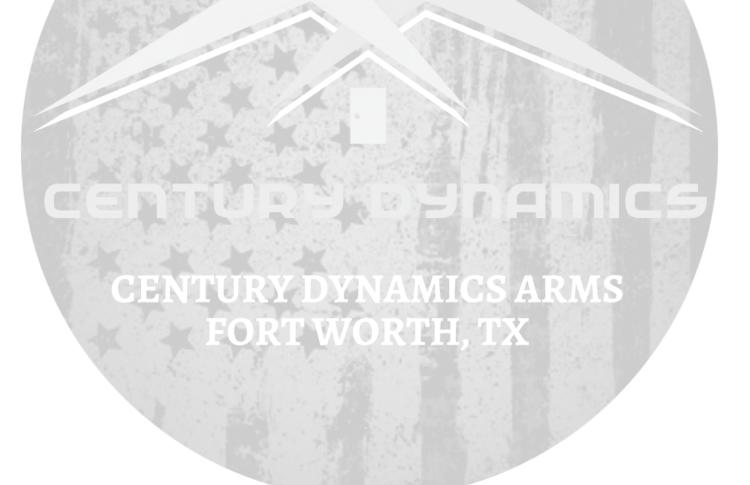

WARRANTY CARD

PURCHASER		
Stree		
City		StateZip
Phone		
Purchase Date	JPJ 1	aynamics-
PRODUCT: Model	Gauge	
SIGNATURE CENTU	JRY DYN	AMICS ARMS
	OKI WU	NIII, IA

Please sign and return this card to validate warranty



CENTURY DYNAMICS ARMS

WWW.CENTURYDYNAMICS.COM

FORT WORTH, TX, USA

817-210-6086

SALES@CENTURY-DYNAMICS.COM

CENTURY DYNAMICS ARMS FORT WORTH, TX