


BFLTW BULLET RESISTANT WINDOW/FRAME ASSEMBLIES
BULLET RESISTANT BAFFLE TRANSACTION WINDOW

Constructed to UL 752 Levels 1-3
 (Assemblies do not bear a UL label of certification)


CUSTOM FRAME AND JAMB SIZES AVAILABLE

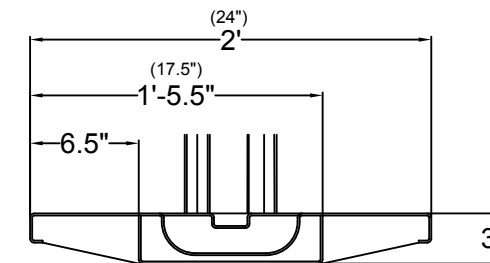

OPTIONAL 6-1/2" STAINLESS STEEL WRITING LEDGE SECTION

- Extends the full width of the sill
- Available on either or both sides of window

BULLET RESISTANT BAFFLE TRANSACTION WINDOWS ARE COMPOSED OF BULLET RESISTANT GLAZING MATERIALS AND FRAMING BUT DO NOT MEET ALL ASPECTS OF UL 752 STANDARDS AND WILL NOT BEAR A UL LABEL. GLAZING MATERIALS ARE TESTED IN 12" SQUARE SAMPLES AND THREE TEST ROUNDS ARE FIRED IN A FOUR INCH TRIANGLE FOR EACH RESPECTIVE BALLISTIC LEVEL (LEVEL 1 - 9mm 124 gr. FMJ LEAD CORE, LEVEL 2 - .357 mag. 240 gr. JSP, LEVEL 3 - .44 mag. 240 gr. Gas Checked SWC).

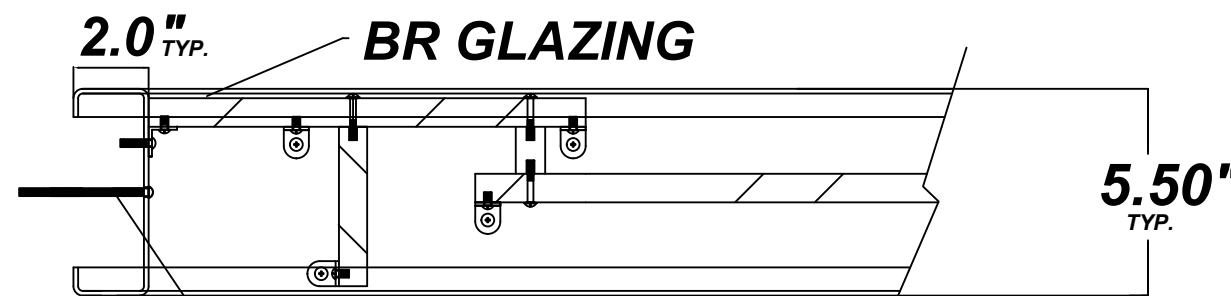

FRAME TO FRAME ANCHOR TYP.

SECT A-A

FILE NO. BP1942
 SECURITY

 LISTED

 CHICAGO BULLET PROOF SYSTEMS, INC.
 2595 BOND ST. UNIVERSITY PARK, IL. 60484
 708-534-9102
 WWW.CHICAGOBULLETPROOF.COM

BFLTW WINDOW

MATERIAL	UL LEVEL	FRAME FINISH	SILL FINISH	WEIGHT
SHOT-TEX 1-1	1-3	PRIME PAINTED, FINISH COATED, OR STAINLESS STEEL	STAINLESS STEEL	TBD
GLAZING TBD	TOLERANCES +/-1/16"	DRAWN BY RANDY R.	CHECKED BY MAX S.	