


**BULLET RESISTANT**

**DOOR WITH PASS THRU & TRANSACTION CAPABILITIES**

# CDR

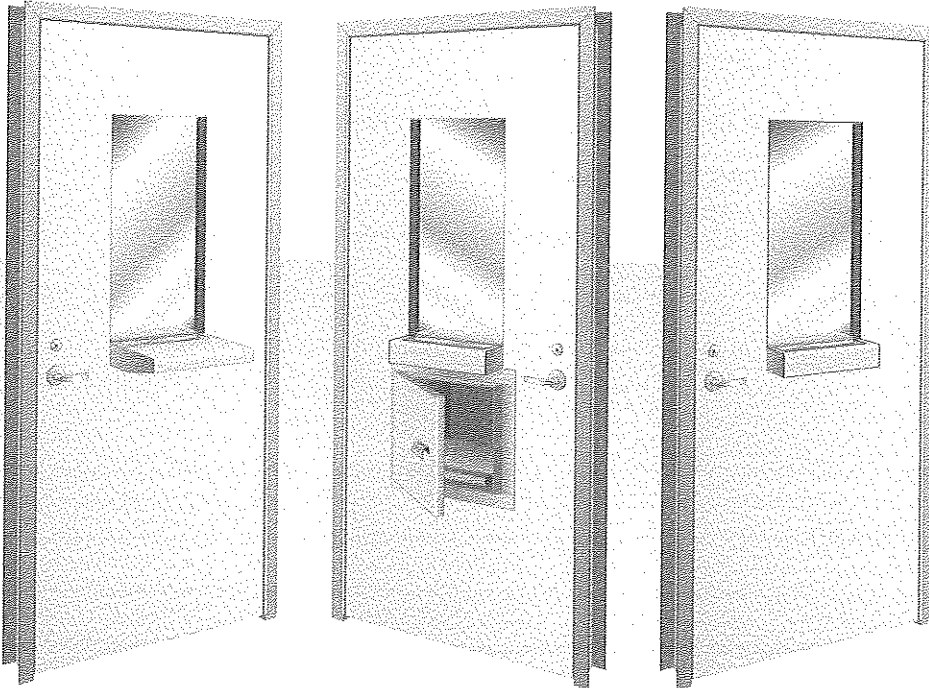

### APPLICATIONS - INTERIOR/EXTERIOR

For both personnel and material passage, CDR allows a person the ability to transact through a door in areas where an additional window or pass through may not fit in a wall: embassies, hospital pharmacies, cashier/money handling areas, currency exchanges

### CODE COMPLIANCE

Assemblies are listed and labeled by Underwriters Laboratories, Inc. (UL) under *Standard for Safety UL 752, Bullet-Resisting Equipment* for:

**Level 1 \*Level 2 \*Level 3 \*Level 4 \*Level 6**

Consult CBPS for higher levels

A label bearing certification is affixed to the protected side of frame.

### DOOR

- All welded construction
- 1-3/4" thick, 1/8" thick internal reinforcing channels
- Formed from SHOT-TEX brand bullet resistant steel

### FRAME

- Double rabbet profile, 2" x 5-1/2.
- Formed from SHOT-TEX brand bullet resistant steel.
- Mitered and welded corners.
- Standard frame is supplied with six (6) "T" strap anchors for installation into coursed masonry walls.
- Clamp-on frame is available which adjusts to finished wall thickness varying from 7-1/2 to 12" by clamping existing wall openings.

### HARDWARE

- Standard package includes:
- Sargent 8104 mortise lockset x OB (knob) trim x US26D (satin chrome) finish.

**CHICAGO BULLET PROOF SYSTEMS**  
2595 BOND ST.  
UNIVERSITY PARK, IL 60484

### HARDWARE CONTINUED

- Lockset function is ANSI F07 (Storeroom or closet function).
  - Key locking cylinder on the threat side/operative knob on interior.
  - Door/Frame assembly is mortised, reinforced, drilled and tapped at the factory for lockset.
  - Heavy duty closer. Yale 4400 x Aluminum finish Mounted at the site by others, drilling and tapping by a field installer.
  - CBP #12252 bullet resistant continuous hinge: prime painted hinge for Level 1 through Level 3 and satin finish stainless steel hinge for Level 4. Hinge preps are drilled and tapped at the factory.
  - Silencers
  - Six (6) "T"-strap anchors for coursed masonry walls, 24" O.C. (max) on each jamb.
- Hardware options are available.

### FINISH

Prior to shipment door and frame are degreased, all welds are ground smooth and assembly is spray-painted with rust-inhibiting primer.

### TRANSACTION WINDOW w/VISION OPENING OF 15" W x 29-9/16" H

- UL Listed bullet resistant transparent armor supplied with frame
  - Shipped in a separate crate. Field glazing is required.
  - Laminated glass is standard
- Optional transparent armors are available.

### DEAL TRAY & SILL

- For transacting items not to exceed 12 3/4"w x 1 5/8"h
  - Satin stainless steel finish. Sill runs width of window.
- Optional ledge feature available.

[WWW.CHICAGOBULLETPROOF.COM](http://WWW.CHICAGOBULLETPROOF.COM)


P. (708) 534-9102

F. (708) 534-9132

# CDR



BULLET RESISTANT



DOOR WITH PASS THRU & TRANSACTION CAPABILITIES

### PP PACKAGE PASSER PASS-THRU (OPTIONAL)

- Constructed from SHOT-TEX brand bullet resistant steel.
- All welded construction.
- Welds are ground smooth before prime painting or brushing stainless steel.

### DOORS

- Constructed from SHOT-TEX brand bullet resistant steel.
- Interlock for one door to be open at one time.
- Handing: from the threat side, exterior door is LHRB and interior door is LH.

### HARDWARE

Standard package includes:

- CBP heavy duty continuous hinges.
- Stainless steel pull handle on exterior door.
- Interior door control handle with three position control handle which permits: exterior unlocked / interior locked, both doors locked, and exterior locked / interior unlocked.
- Return spring on exterior door to facilitate closing.

### EXTRA COST OPTIONS:

- Control handle with key,
- Weatherstripping for exterior door.

### Standard Sizes

Model	Jamb Opening Size	O.A. Frame	Min. Wall Opening	Shipping WT. Lbs. Lvl 1-3
<b>STANDARD BUILT-IN FRAME</b>				
DR 3684	3'0" x 7'0"	40" x 86"	40 1/2" x 86 1/2"	395/675
<b>CLAMP-ON FRAME</b>				
DR 3684	3'0" x 7'0"	40" x 86"	38 1/2" x 85 1/2"	395/675

Custom and special Door/Frame and size conditions are available. Please contact CBPS.

