

OVERALL FRAME WIDTH JAMB OPENING WIDTH OVERALL FRAME HEIGHT IAMB OPENING HEIGHT 3-7/8"

STANDARD FRAME PROFILE: 2" X 5.5"

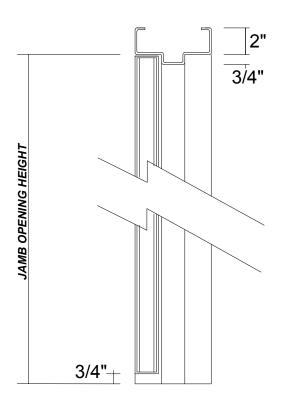

SECTION VIEW

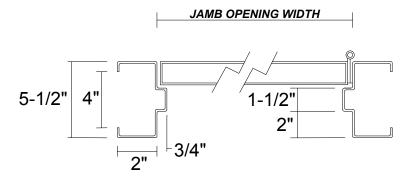

THREAT SIDE ELEVATION

PLAN VIEW

CBP Model DL

Dual Bullet and Fire Resistant Door and Frame

UL 752 Listed Level 4 or 8 and UL 10B 3hr Fire/Hose Stream Test Listed Flush Door Assembly

(A label bearing certification is affixed to the protected side of the frame)

CONFIGURATIONS:

- -CUSTOM SIZES UP TO 3'-6" x 8'
- -PAIR DOORS (LEVEL 4 ONLY)

DOORS:

- -ALL WELDED CONSTRUCTION
- -1-3/4" THICK

FRAME:

- -DOUBLE RABBET PROFILE: 2" X 5-1/2"
- -MITERED AND WELDED CORNERS
- -SUPPLIED WITH SIX "T"-STRAP ANCHORS

STANDARD HARDWARE PACKAGE:

- -SARGENT 8204 x LNJ x US26D
- STOREROOM FUNCTION MORTISE LEVER
- LOCKSET
- -YALE 4400 x 689 HEAVY DUTY CLOSER -CBP #12252 BULLET RESISTANT
- -CBP #12252 BULLET RESISTANT CONTINUOUS HINGE
- -SILENCERS
- -"T"-STRAP ANCHORS

OTHER HARDWARE OPTIONS:

- -PREP ONLY FOR HARDWARE BY OTHERS
- -THRESHOLD AND WEATHERSTRIP
- -PREP FOR BOLT OR SCREW ANCHORS



Metaltek Fabricating, Inc. 2015